


INTONO C IN


INDOOR CEILING MOUNTED WITH LIGHT OUTPUT ALONE OR ALSO WITH SPEAKER FOR PRIVATE HOMES AND HOSPITALITY



INDOOR

OUTDOOR

CEILING MOUNTED




INTONO C IN 2.3 p. 646
12W 230Vac
ON/OFF

INTONO C OUT p. 374



INTONO C IN 3.3 p. 647
20W 230Vac
ON/OFF, DALI, 0/1-10V



INTONO C IN 3.8 p. 647
9W 24Vdc

WALL MOUNTED


INTONO p. 324





^
INTONO C IN 3.8

speaker:
maximum power
nominal impedance Z
mean sound pressure level

3W
16 Ohm
86 dB (1W/1m)



INTONO C IN 2.3

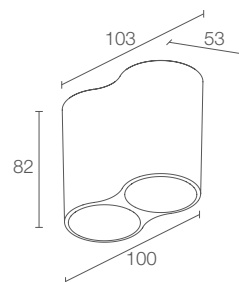

Asymmetrical optics
(Intono C IN 3.3)

v
INTONO C IN 3.3

painting primer version



CE LED TECH IP40 IK06
A A+ A++

POWER / POWER SUPPLY CODE

12W 230Vac
NC2310 00 **B** White
NC2310 00 **N** Black
NC2310 00 **Z** Antique bronze
NC2310 00 **7** Primer

CRI
0 - CRI 80
1 - CRI >90


CONTROL SYSTEM on/off

HONEYCOMB LOUVRE
0 - not present
1 - present
(not compatible with the diffuse optics)

LED COLOUR
F - 2700K
5 - 3000K
9 - 4000K

OPTICS
TT - 11°
MM - 34°
KK - 68°
DD - diffuse

LUMEN OUTPUT AT SOURCE	976 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	704 lm (3000K, 34°, CRI 80)
NO. AND TYPE OF LED	2 power LEDs 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in black-serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling)
ACCESSORIES	none
FEATURES	easy installation thanks to 4-point magnetic fastener
NOTES	outdoor version: Intono C OUT 2.4 p. 376 wall-mounted version: Intono p. 324 version compatible with Google Home or Amazon Echo available on request for voice command control Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 839

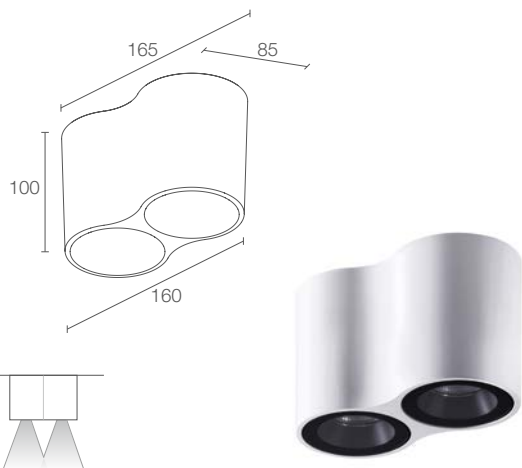

INTONO C IN 3.3

CE kg 1.15 IP40 IK06 DALI 0/1-10V

20W 230Vac

NC3310 **0** **B** White
NC3310 **0** **N** Black
NC3310 **0** **Z** Antique bronze
NC3310 **0** **7** Primer

0 - CRI 80
1 - CRI >90

0 - on/off
D - DALI
R - 0/1-10V

0 - not present
1 - present
 (not compatible with the asymmetrical optics)

F - 2700K
5 - 3000K
9 - 4000K

SS - 15°
MM - 20°
LL - 43°
AA - asymmetrical

1976 lm (3000K, CRI 80)

1674 lm (3000K, 15°, CRI 80)

2 high power density COB LEDs
 2-step MacAdam, 50000h L95 B10 (Ta 25°C)

body in die-cast aluminium
 screen in black-serigraphed and transparent,
 tempered extra-clear glass

built in


surface mounted (ceiling)

none

easy installation thanks to 4-point
 magnetic fastener

outdoor version: Intono C OUT 3.4 p. 377
 wall-mounted version: Intono p. 324
 version compatible with Google Home
 or Amazon Echo available on request
 for voice command control
 Casambi-compatible version, controllable with
 the Casambi app, available on request

see p. 839

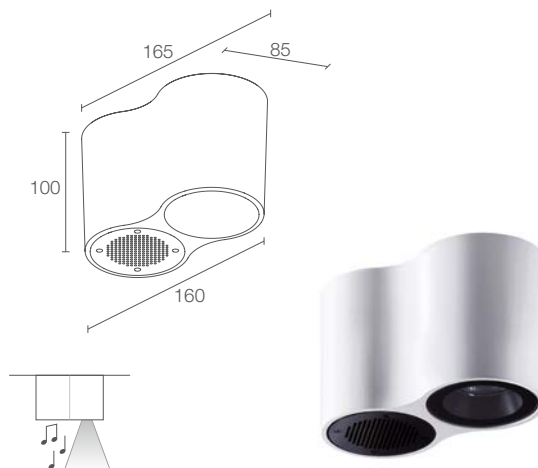

INTONO C IN 3.8

CE kg 1.15 IP40 IK06

9W 24Vdc

NC3800 **00** **M9 B** White
NC3800 **00** **M9 N** Black
NC3800 **00** **M9 Z** Antique bronze
NC3800 **00** **M9 7** Primer

0 - CRI 80
1 - CRI >90

0 - not present
1 - present

F - 2700K
5 - 3000K
9 - 4000K

20°

988 lm (3000K, CRI 80)

783 lm (3000K, 20°, CRI 80)

1 high power density COB LED
 2-step MacAdam, 50000h L95 B10 (Ta 25°C)

body in die-cast aluminium
 screen in black-serigraphed and transparent,
 tempered extra-clear glass

not included, see p. 904


surface mounted (ceiling)

see p. 649

easy installation thanks to 4-point
 magnetic fastener

outdoor version: Intono C OUT 3.9 p. 377
 wall-mounted version: Intono p. 324
 version compatible with Google Home
 or Amazon Echo available on request
 for voice command control
 Casambi-compatible version, controllable with
 the Casambi app, available on request

see p. 839





ACCESSORIES

ACCESSORIES



WUNT39A00

Bluetooth 3.0 audio control kit with power supply unit and amplifier (for Alexa or Google voice-control systems)
(Intono C IN 3.8)




WUNT39A01


Wi-Fi light control kit
(Intono C IN 3.8)

INTONO C IN 2.3 INTONO C OUT 2.4


TT - 11° CRI 80

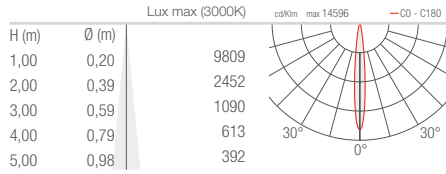


MM - 34° CRI 80

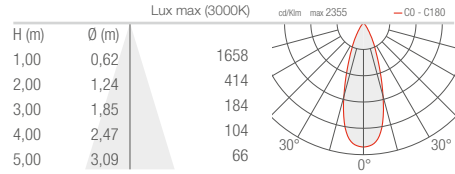

KK - 68° CRI 80

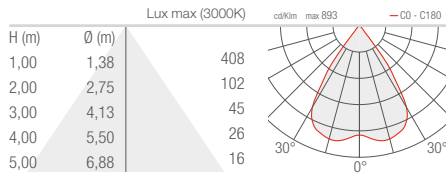


DD - Diffuse CRI 80

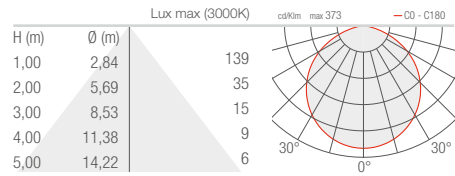


INTONO C IN 3.3 INTONO C OUT 3.4


SS - 15° CRI 80

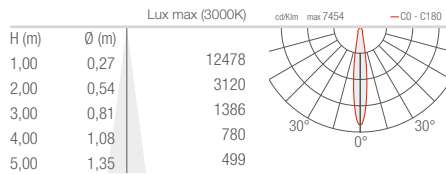


MM - 20° CRI 80

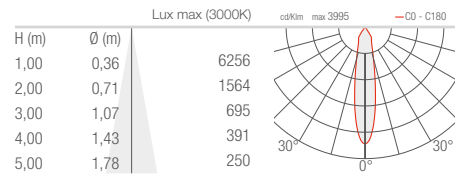

LL - 43° CRI 80

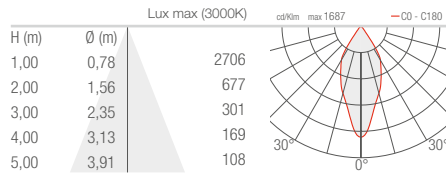

AA - Asymmetrical CRI 80

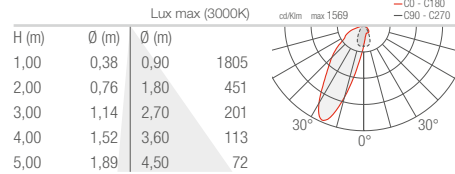

INTONO C IN 3.8 INTONO C OUT 3.9

M - 20° CRI 80

