

INDOOR RECESSED DOWNLIGHTS GENERAL LIGHT FOR PRIVATE HOMES



diffuse



2700K 3000K 4000K

4.5W
24VDC
5.5W
230VAC
ON/OFF

5.5W/11W
230VAC
ON/OFF
DALI
0/1-10V
MAINS DIMMING

11W/15W
230VAC
ON/OFF
DALI
0/1-10V
MAINS DIMMING

15W/22W
230VAC
ON/OFF
DALI
0/1-10V
MAINS DIMMING

ROUND COVER



TURIS MINI 1.1 p. 517
Ø44 mm



TURIS 1.1 p. 518
Ø62 mm



TURIS 3.1 p. 524
Ø100 mm



TURIS 5.1 p. 527
Ø128.5 mm



TURIS 1.3 p. 519
Ø62 mm



TURIS 3.3 p. 525
Ø100 mm

SQUARE COVER



TURIS MINI 1.0 p. 517
42x42 mm




TURIS 1.0 p. 518
61x61 mm



TURIS 3.0 p. 524
97x97 mm



TURIS 5.0 p. 527
133x133 mm



TURIS 1.2 p. 519
61x61 mm



TURIS 3.2 p. 525
97x97 mm




TURIS 2.0 p. 523
70x70 mm




TURIS 4.0 p. 526
94x94 mm



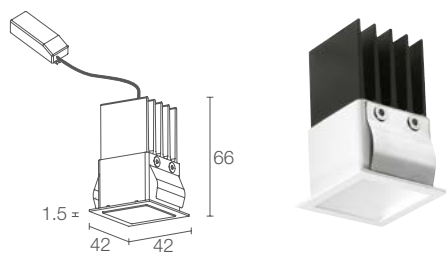

Power supply unit included in the 230Vac version

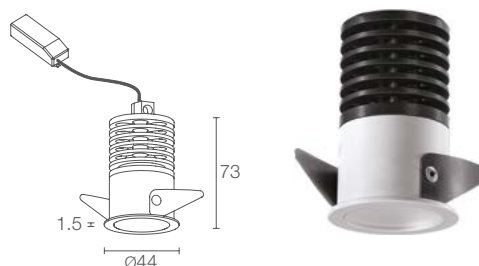

Power supply unit included in the 230Vac version

TURIS MINI 1.0

140x140 mm
H 120 mm

37x37 mm

CE ENEC LED TOP 230Vac 24Vdc kg 0.15 IP40
A A+ A++ CASAMBI

POWER / POWER SUPPLY CODE

5.5W 230Vac
MT1011 D B White

4.5W 24Vdc
MT1001 D B White

LED COLOUR

F - 2700K
5 - 3000K
9 - 4000K
RGB on request

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE	460 lm (3000K)
DELIVERED LUMEN OUTPUT	295 lm (3000K)
NO. AND TYPE OF LED	1 multichip power LED 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	230Vac: included and wired 24Vdc: not included, see p. 904
POWER CABLES	230Vac: includes 0.30 m cable 24Vdc: includes 1.5 m PVC cable FROR 2x0.35/0.35 Ø3.5 mm
MOUNTING	recessed (ceiling)
ACCESSORIES	see p. 529
FEATURES	230Vac: on/off 24Vdc: dimmable with remote PSU CRI >90
PHOTOMETRIC DATA	see p. 896

TURIS MINI 1.1

Ø 140 mm
H 120 mm

Ø 40 mm

CE ENEC LED TOP 230Vac 24Vdc kg 0.15 IP40
A A+ A++ CASAMBI


5.5W 230Vac
MT1111 D B White
MT1111 D C Chrome

4.5W 24Vdc
MT1101 D B White
MT1101 D C Chrome

F - 2700K
5 - 3000K
9 - 4000K
RGB on request


diffuse

LUMEN OUTPUT AT SOURCE	460 lm (3000K)
DELIVERED LUMEN OUTPUT	310 lm (3000K)
NO. AND TYPE OF LED	1 multichip power LED 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	230Vac: included and wired 24Vdc: not included, see p. 904
POWER CABLES	230Vac: includes 0.30 m cable 24Vdc: includes 1.5 m PVC cable FROR 2x0.35/0.35 Ø3.5 mm
MOUNTING	recessed (ceiling)
ACCESSORIES	see p. 529
FEATURES	230Vac: on/off 24Vdc: dimmable with remote PSU CRI >90
PHOTOMETRIC DATA	see p. 896



< TURIS MINI 1.1 3000K, 5.5W, chrome

Project by / Studio di Architettura Andrea Abbadessa,
ing. Ignazio Stancanelli, ing. Giuseppe Malatino
Light planning by / Light Style
Maniace-Ortigia, Syracuse, Italy

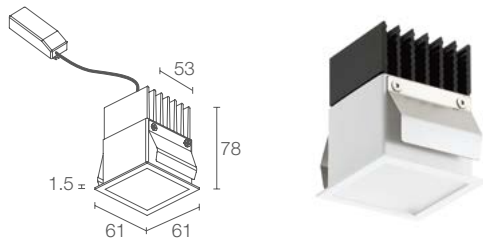

TURIS 1.0

140x140 mm
H 130 mm 56x56 mm

CE CB EAC LED TECH kg 0.37 IP40
A A+ A++ DALI PUSH 0/1-10V

POWER SUPPLY CODE

230Vac
TU101 ■ ■ **DB** White
TU101 ■ ■ **DN** Black
TU101 ■ ■ **DG** Grey

230Vac 0/1-10V + PUSH
TU101 ■ ■ **DBR** White
TU101 ■ ■ **DNR** Black
TU101 ■ ■ **DGR** Grey


230Vac DALI
TU101 ■ ■ **DBD** White
TU101 ■ ■ **DND** Black
TU101 ■ ■ **DGD** Grey

230Vac MAINS DIMMING 11W
TU1010 ■ **DBT** White
TU1010 ■ **DNT** Black
TU1010 ■ **DGT** Grey

■ POWER	1 - 5.5W 0 - 11W
■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K RGB on request

OPTICS diffuse

LUMEN OUTPUT AT SOURCE	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
DELIVERED LUMEN OUTPUT	295 lm (3000K, 5.5W) 1003 lm (3000K, 11W)
NO. AND TYPE OF LED	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	included and wired
POWER CABLES	includes 0.30 m cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see p. 529
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL
PHOTOMETRIC DATA	see p. 896

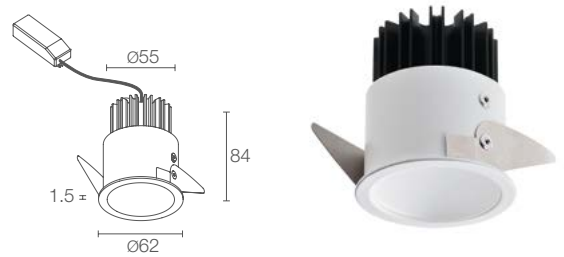

TURIS 1.1

Ø 130 mm
H 130 mm Ø 57 mm

CE CB EAC LED TECH kg 0.33 IP40
A A+ A++ DALI PUSH 0/1-10V

230Vac
TU110 ■ ■ **DB** White
TU110 ■ ■ **DN** Black
TU110 ■ ■ **DG** Grey

230Vac 0/1-10V + PUSH
TU110 ■ ■ **DBR** White
TU110 ■ ■ **DNR** Black
TU110 ■ ■ **DGR** Grey



230Vac DALI
TU110 ■ ■ **DBD** White
TU110 ■ ■ **DND** Black
TU110 ■ ■ **DGD** Grey

230Vac MAINS DIMMING 11W
TU1100 ■ **DBT** White
TU1100 ■ **DNT** Black
TU1100 ■ **DGT** Grey


■ POWER	1 - 5.5W 0 - 11W
■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K RGB on request

OPTICS diffuse


LUMEN OUTPUT AT SOURCE	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
DELIVERED LUMEN OUTPUT	310 lm (3000K, 5.5W) 944 lm (3000K, 11W)
NO. AND TYPE OF LED	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	included and wired
POWER CABLES	includes 0.30 m cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see p. 529
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL
PHOTOMETRIC DATA	see p. 896

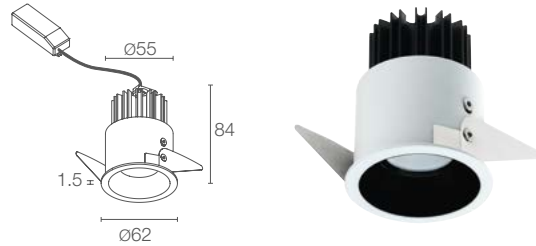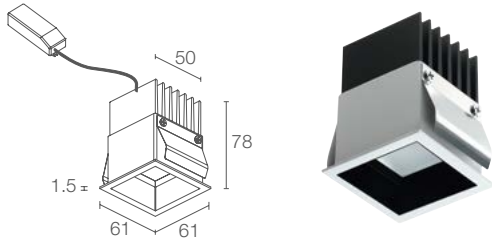

TURIS 1.2



TURIS 1.3



CE CB EAC LED TECH IP40
 A A+ A++ DALI PUSH 0/1-10V

CE CB EAC LED TECH IP40
 A A+ A++ DALI PUSH 0/1-10V

230Vac
TU121 ■ ■ **DB** White
TU121 ■ ■ **DN** Black
TU121 ■ ■ **DG** Grey

230Vac
TU131 ■ ■ **DB** White
TU131 ■ ■ **DN** Black
TU131 ■ ■ **DG** Grey

230Vac 0/1-10V + PUSH
TU121 ■ ■ **DBR** White
TU121 ■ ■ **DNR** Black
TU121 ■ ■ **DGR** Grey

230Vac 0/1-10V + PUSH
TU131 ■ ■ **DBR** White
TU131 ■ ■ **DNR** Black
TU131 ■ ■ **DGR** Grey

230Vac DALI
TU121 ■ ■ **DBD** White
TU121 ■ ■ **DND** Black
TU121 ■ ■ **DGD** Grey

230Vac DALI
TU131 ■ ■ **DBD** White
TU131 ■ ■ **DND** Black
TU131 ■ ■ **DGD** Grey

230Vac MAINS DIMMING 11W
TU1210 ■ **DBT** White
TU1210 ■ **DNT** Black
TU1210 ■ **DGT** Grey

230Vac MAINS DIMMING 11W
TU1310 ■ **DBT** White
TU1310 ■ **DNT** Black
TU1310 ■ **DGT** Grey

■	1 - 5.5W 0 - 11W
■	F - 2700K 5 - 3000K 9 - 4000K RGB on request

■	1 - 5.5W 0 - 11W
■	F - 2700K 5 - 3000K 9 - 4000K RGB on request

diffuse

diffuse

644 lm (3000K, 5.5W)
1251 lm (3000K, 11W)

644 lm (3000K, 5.5W)
1251 lm (3000K, 11W)

303 lm (3000K, 5.5W)
631 lm (3000K, 11W)

302 lm (3000K, 5.5W)
629 lm (3000K, 11W)

1 power LED (5.5W version)
4 power LEDs (11W version)
3-step MacAdam, 50000h L80 B10 (Ta 25°C)

1 power LED (5.5W version)
4 power LEDs (11W version)
3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in black-anodized aluminium
trim in steel
screen in one-side-frosted, transparent plexiglass

body in black-anodized aluminium
trim in steel
screen in one-side-frosted, transparent plexiglass

included and wired

included and wired

includes 0.30 m cable

includes 0.30 m cable

recessed (ceiling)

recessed (ceiling)

see p. 529

see p. 529

CRI >90


CRI >90

available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL

available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL

see p. 896


see p. 896









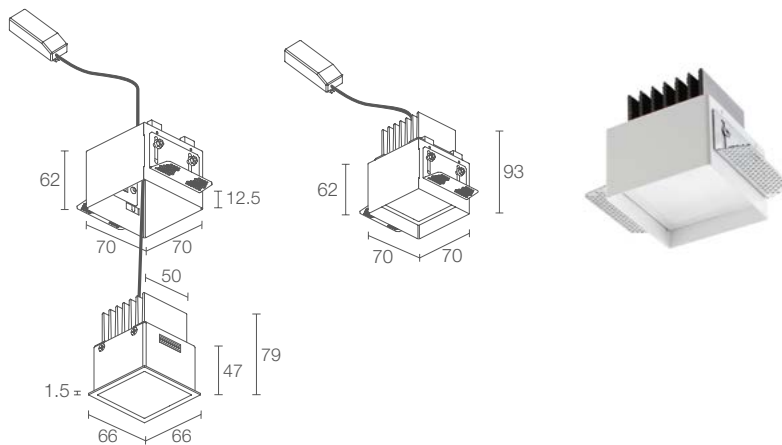

Required outer casing, not included

TURIS 2.0

150x150 mm
H 140 mm

70x70 mm

CE CB ENEC LED TECH

kg 0.30 IP40

A A+ A++ DALI PUSH 0/1-10V

POWER SUPPLY CODE

230Vac
TU201 ■ ■ D B

230Vac 0/1-10V + PUSH
TU201 ■ ■ D BR


230Vac DALI
TU201 ■ ■ D BD

230Vac MAINS DIMMING 11W
TU2010 ■ D BT

POWER	1 - 5.5W 0 - 11W
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K RGB on request
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
DELIVERED LUMEN OUTPUT	295 lm (3000K, 5.5W) 1003 lm (3000K, 11W)
NO. AND TYPE OF LED	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	included and wired
POWER CABLES	includes 0.30 m cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see p. 529
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL
PHOTOMETRIC DATA	see p. 896

< **TURIS 1.0**
3000K, 11W, white

Light planning by / Imat Felco Como
Executed by / Punto Luce di Simonetti Wimmer
Photo by / Alessio Tamborini
Private residence, Como, Italy

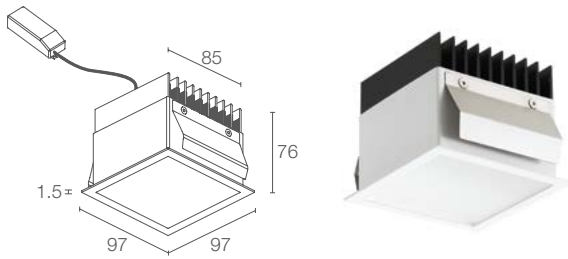

TURIS 3.0

170x170 mm
H 130 mm 90x90 mm

CE CB EAC LED 100% kg 0.71 IP40
A A+ A++ DALI PUSH 0/1-10V

POWER SUPPLY CODE

230Vac
TU301 ■ ■ **D B** White
TU301 ■ ■ **D N** Black
TU301 ■ ■ **D G** Grey


230Vac 0/1-10V + PUSH
TU301 ■ ■ **D BR** White
TU301 ■ ■ **D NR** Black
TU301 ■ ■ **D GR** Grey

230Vac DALI
TU301 ■ ■ **D BD** White
TU301 ■ ■ **D ND** Black
TU301 ■ ■ **D GD** Grey

230Vac MAINS DIMMING
TU301 ■ ■ **D BT** White
TU301 ■ ■ **D NT** Black
TU301 ■ ■ **D GT** Grey

■ POWER	1 - 11W 0 - 15W
■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1251 lm (3000K, 11W) 1870 lm (3000K, 15W)
DELIVERED LUMEN OUTPUT	975 lm (3000K, 11W) 1463 lm (3000K, 15W)
NO. AND TYPE OF LED	4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	included and wired
POWER CABLES	includes 0.30 m cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see p. 529
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL
PHOTOMETRIC DATA	see p. 897

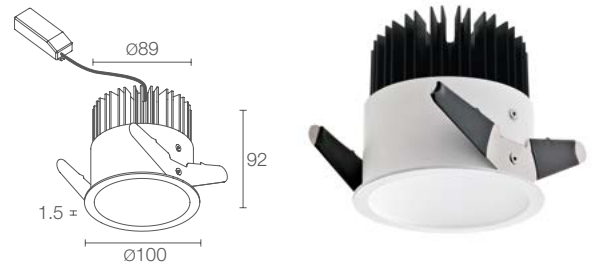

TURIS 3.1

Ø 190 mm
H 160 mm Ø 90 mm

CE CB EAC LED 100% kg 0.67 IP40
A A+ A++ DALI PUSH 0/1-10V

230Vac
TU310 ■ ■ **D B** White
TU310 ■ ■ **D N** Black
TU310 ■ ■ **D G** Grey



230Vac 0/1-10V + PUSH
TU310 ■ ■ **D BR** White
TU310 ■ ■ **D NR** Black
TU310 ■ ■ **D GR** Grey

230Vac DALI
TU310 ■ ■ **D BD** White
TU310 ■ ■ **D ND** Black
TU310 ■ ■ **D GD** Grey

230Vac MAINS DIMMING
TU310 ■ ■ **D BT** White
TU310 ■ ■ **D NT** Black
TU310 ■ ■ **D GT** Grey

■ POWER	1 - 11W 0 - 15W
■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1251 lm (3000K, 11W) 1870 lm (3000K, 15W)
DELIVERED LUMEN OUTPUT	954 lm (3000K, 11W) 1431 lm (3000K, 15W)
NO. AND TYPE OF LED	4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	included and wired
POWER CABLES	includes 0.30 m cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see p. 529
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL
PHOTOMETRIC DATA	see p. 897

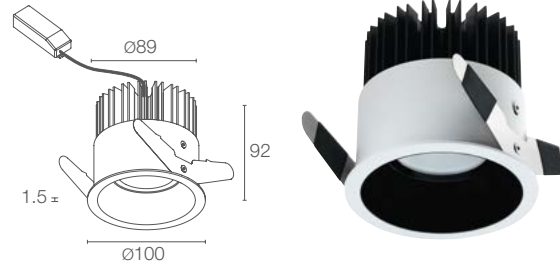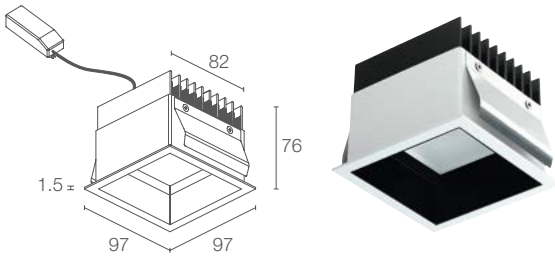

TURIS 3.2

170x170 mm
H 130 mm 90x90 mm

CE CB ENEC LED VIBRO kg 0.71 IP40
A A+ A++ DALI PUSH 0/1-10V

230Vac
TU321 ■ ■ **DB** White
TU321 ■ ■ **DN** Black
TU321 ■ ■ **DG** Grey

230Vac 0/1-10V + PUSH
TU321 ■ ■ **DBR** White
TU321 ■ ■ **DNR** Black
TU321 ■ ■ **DGR** Grey

230Vac DALI
TU321 ■ ■ **DBD** White
TU321 ■ ■ **DND** Black
TU321 ■ ■ **DGD** Grey

230Vac MAINS DIMMING
TU321 ■ ■ **DBT** White
TU321 ■ ■ **DNT** Black
TU321 ■ ■ **DGT** Grey

■ 1 - 11W
■ 0 - 15W

■ F - 2700K
■ 5 - 3000K
■ 9 - 4000K

diffuse

1251 lm (3000K, 11W)
 1870 lm (3000K, 15W)

755 lm (3000K, 11W)
 1117 lm (3000K, 15W)

4 power LEDs (11W version)
 6 power LEDs (15W version)
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in black-anodized aluminium
 trim in steel
 screen in one-side-frosted, transparent plexiglass

included and wired

includes 0.30 m cable

recessed (ceiling)

see p. 529

CRI >90

Casambi-compatible version, controllable with the Casambi app, available on request

see p. 897

TURIS 3.3

Ø 190 mm
H 160 mm Ø 90 mm

CE CB ENEC LED VIBRO kg 0.67 IP40
A A+ A++ DALI PUSH 0/1-10V

230Vac
TU331 ■ ■ **DB** White
TU331 ■ ■ **DN** Black
TU331 ■ ■ **DG** Grey

230Vac 0/1-10V + PUSH
TU331 ■ ■ **DBR** White
TU331 ■ ■ **DNR** Black
TU331 ■ ■ **DGR** Grey

230Vac DALI
TU331 ■ ■ **DBD** White
TU331 ■ ■ **DND** Black
TU331 ■ ■ **DGD** Grey

230Vac MAINS DIMMING
TU331 ■ ■ **DBT** White
TU331 ■ ■ **DNT** Black
TU331 ■ ■ **DGT** Grey

■ 1 - 11W
■ 0 - 15W

■ F - 2700K
■ 5 - 3000K
■ 9 - 4000K

diffuse

1251 lm (3000K, 11W)
 1870 lm (3000K, 15W)

784 lm (3000K, 11W)
 1160 lm (3000K, 15W)

4 power LEDs (11W version)
 6 power LEDs (15W version)
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in black-anodized aluminium
 trim in steel
 screen in one-side-frosted, transparent plexiglass

included and wired

includes 0.30 m cable

recessed (ceiling)


see p. 529

CRI >90

Casambi-compatible version, controllable with the Casambi app, available on request

see p. 897



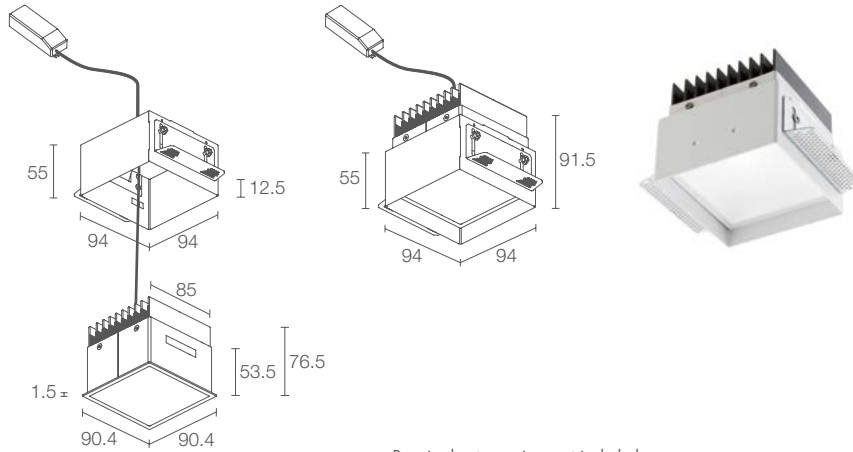

Required outer casing, not included

TURIS 4.0

180x180 mm
H 140 mm

95x95 mm

CE CB ENEC LED TCO

kg 0.50 IP40

A A+ A++ DALI PUSH 0/1-10V

POWER SUPPLY CODE

230Vac
TU401 ■ ■ ■ **D B**



230Vac 0/1-10V + PUSH
TU401 ■ ■ ■ **D BR**

230Vac DALI
TU401 ■ ■ ■ **D BD**

230Vac MAINS DIMMING
TU401 ■ ■ ■ **D BT**

POWER	1 - 11W 0 - 15W
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1251 lm (3000K, 11W) 1870 lm (3000K, 15W)
DELIVERED LUMEN OUTPUT	975 lm (3000K, 11W) 1463 lm (3000K, 15W)
NO. AND TYPE OF LED	4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	included and wired
POWER CABLES	includes 0.30 m cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see p. 529
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL
PHOTOMETRIC DATA	see p. 897

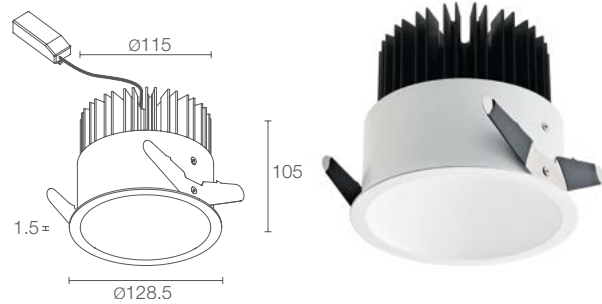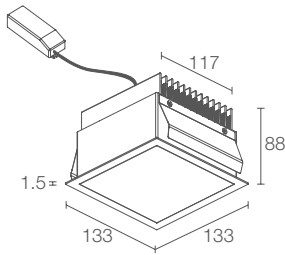

TURIS 5.0

200x200 mm H 130 mm 125x125 mm

CE CB ENEC LED TECH IP40
A A+ A++ DALI PUSH 0/1-10V

POWER SUPPLY CODE

230Vac
TU501 ■ ■ **DB** White
TU501 ■ ■ **DN** Black
TU501 ■ ■ **DG** Grey

230Vac 0/1-10V + PUSH
TU501 ■ ■ **DBR** White
TU501 ■ ■ **DNR** Black
TU501 ■ ■ **DGR** Grey

230Vac DALI + PUSH
TU501 ■ ■ **DBD** White
TU501 ■ ■ **DND** Black
TU501 ■ ■ **DGD** Grey

230Vac MAINS DIMMING
TU501 ■ ■ **DBT** White
TU501 ■ ■ **DNT** Black
TU501 ■ ■ **DGT** Grey

■ POWER	1 - 15W 0 - 22W
■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1870 lm (3000K, 15W) 2231 lm (3000K, 22W)
DELIVERED LUMEN OUTPUT	1312 lm (3000K, 15W) 1750 lm (3000K, 22W)
NO. AND TYPE OF LED	6 power LEDs (15W version) 8 power LEDs (22W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel; screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	included and wired
POWER CABLES	includes 0.30 m cable
MOUNTING	recessed (ceiling)
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL
PHOTOMETRIC DATA	see p. 897

TURIS 5.1

Ø 220 mm H 160 mm Ø 117 mm

CE CB ENEC LED TECH IP40
A A+ A++ DALI PUSH 0/1-10V

230Vac
TU510 ■ ■ **DB** White
TU510 ■ ■ **DN** Black
TU510 ■ ■ **DG** Grey


230Vac 0/1-10V + PUSH
TU510 ■ ■ **DBR** White
TU510 ■ ■ **DNR** Black
TU510 ■ ■ **DGR** Grey

230Vac DALI + PUSH
TU510 ■ ■ **DBD** White
TU510 ■ ■ **DND** Black
TU510 ■ ■ **DGD** Grey

230Vac MAINS DIMMING
TU510 ■ ■ **DBT** White
TU510 ■ ■ **DNT** Black
TU510 ■ ■ **DGT** Grey

■ POWER	1 - 15W 0 - 22W
■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse


LUMEN OUTPUT AT SOURCE	1870 lm (3000K, 15W) 2231 lm (3000K, 22W)
DELIVERED LUMEN OUTPUT	1312 lm (3000K, 15W) 1750 lm (3000K, 22W)
NO. AND TYPE OF LED	6 power LEDs (15W version) 8 power LEDs (22W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminium trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	included and wired
POWER CABLES	includes 0.30 m cable
MOUNTING	recessed (ceiling)
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL
PHOTOMETRIC DATA	see p. 897






ACCESSORIES


ACCESSORIES FOR INSTALLATION




WC3107
Outer casing for solid walls
(Turis Mini 1.0)




WC3108
Outer casing for solid walls
(Turis Mini 1.1)

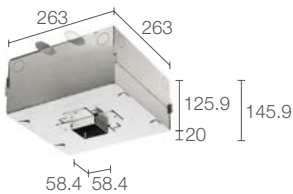

WC3101
Outer casing for solid walls
(Turis 1.0 / 1.2)

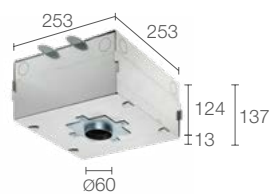


WC3105
Outer casing for solid walls
(Turis 1.1 / 1.3)

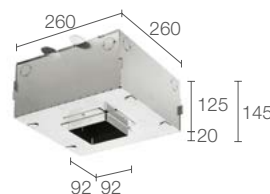


WC3103
Outer casing for solid walls
(Turis 3.0 / 3.2)



WC3106
Outer casing for solid walls
(Turis 3.1 / 3.3)



WC3102
Outer casing for plasterboard
(Turis 2.0)




WC3104
Outer casing for plasterboard
(Turis 4.0)

< **TURIS 3.0**
4000K, 15W, white

Project by / ARGE DD-TOL
AB Raum und Bau GmbH,
AB Fuchs und Rudolph,
AGZ Zimmermann, Arch. GmbH
Contractor / STESAD GmbH
Photo by / Robert Gommlich
Gymnasium Tolkewitz, Dresden, Germany


TURIS MINI 1.0

D - Diffuse

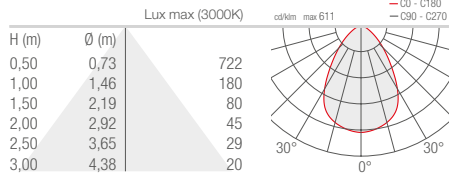


TURIS MINI 1.1

D - Diffuse

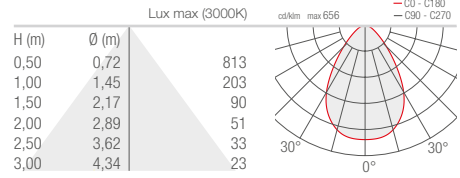


TURIS 1.0 2.0

D - Diffuse

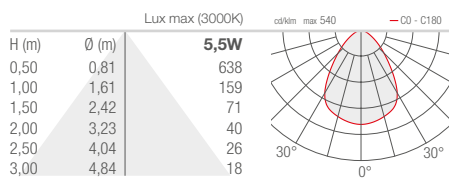


D - Diffuse

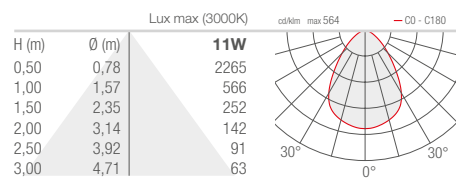


TURIS 1.1

D - Diffuse

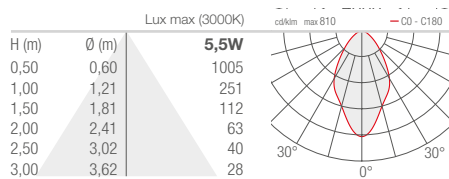


D - Diffuse

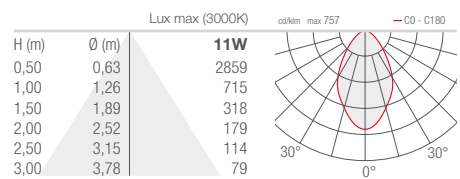


TURIS 1.2

D - Diffuse

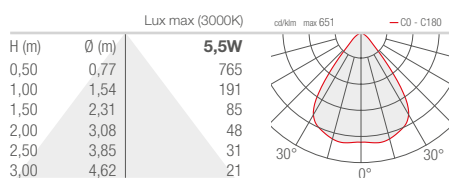


D - Diffuse

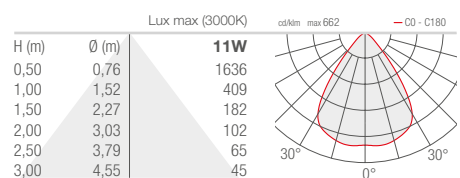


TURIS 1.3

D - Diffuse

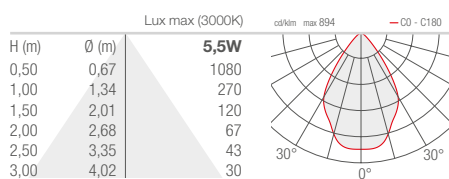


D - Diffuse

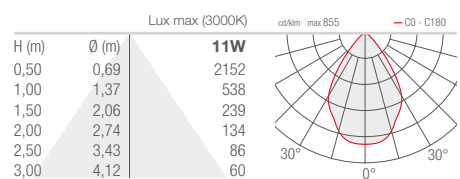


TURIS 3.0
4.0

D - Diffuse

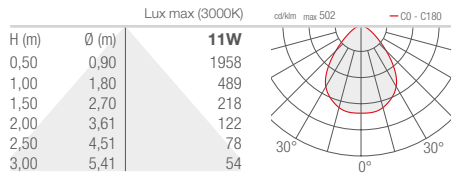


D - Diffuse

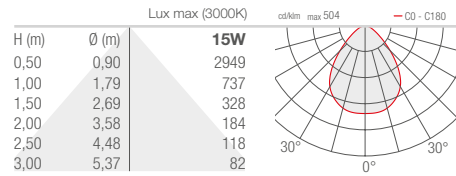


TURIS 3.1

D - Diffuse

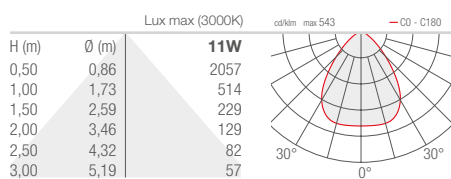


D - Diffuse

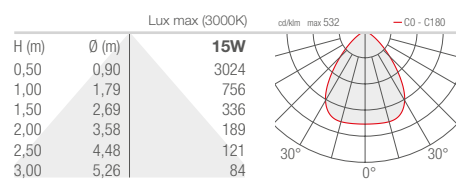


TURIS 3.2

D - Diffuse

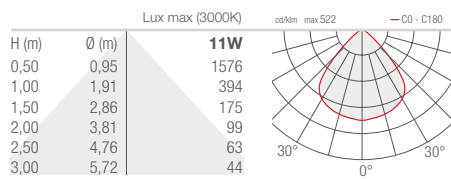


D - Diffuse

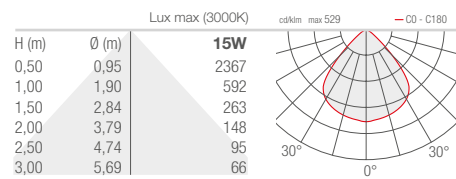


TURIS 3.3

D - Diffuse

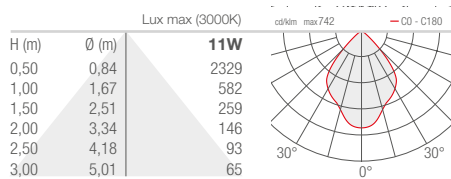


D - Diffuse

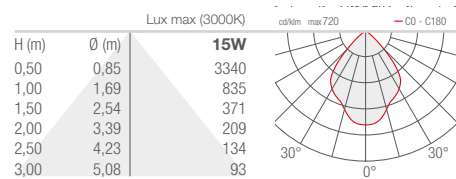

TURIS 5.0
5.1

D - Diffuse

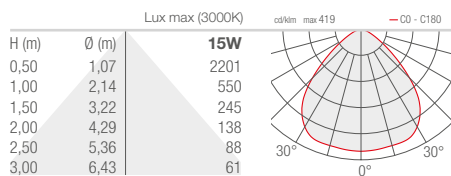

D - Diffuse

