

## INDOOR CEILING MOUNTED FOR OFFICES AND WORK SPACES

2700K 3000K 4000K



**1 OPTICS UNIT**




**4 OPTICS  
IN A SQUARE**



**4 OPTICS  
IN A LINE**

### CEILING MOUNTED



narrow medium wide elliptical



**BITPOP C 1.0** p. 652  
6.5W 24Vdc  
ON/OFF



**BITPOP C 2.2** p. 653  
18W 230Vac  
ON/OFF, DALI, 0/1-10V





**BITPOP C 4.1** p. 653  
18W 230Vac  
ON/OFF, DALI, 0/1-10V

### RECESSED

**BITPOP** p. 530

✓  
**BITPOP C 1.0**  
 4000K, 6.5W, 17°, black

Project by / Studio Carella + Salvato  
 Executed by / ing. Giuseppe Occulto  
 Photo by / Alessio Tamborini  
 LEX law firm, Foggia, Italy



## BITPOP C 1.0

CE CB EAC LED TECH III kg 0.30 IP40  
 A A+ A++

### POWER / POWER SUPPLY CODE

6.5W 24Vdc  
**BC1000** ■ ■ **B 0** White - Black  
**BC1000** ■ ■ **N 0** Black - Black

### LED COLOUR




**1F** - 2700K CRI >90  
**15** - 3000K CRI >90  
**09** - 4000K CRI 80

### OPTICS

**S** - 17°  
**F** - 30°  
**L** - 42°  
**W** - 17°x45°

### CONTROL SYSTEM

LUMEN OUTPUT AT SOURCE	480 lm (3000K)
DELIVERED LUMEN OUTPUT	335 lm (3000K, 30°)
NO. AND TYPE OF LED	1 high-intensity power LED 3-step MacAdam, 50000h L85 B10 (Ta 25°C)
MATERIAL	body in aluminium trim in steel
POWER SUPPLY UNIT	not included, see p. 904
POWER CABLES	includes 1.5 m PVC cable FROR 2x0.35 Ø3.5 mm
MOUNTING	surface mounted (ceiling)
FEATURES	UGR < 10 for the 17° and 30° optics
NOTES	recessed version: Bitpop 1.0, p. 532 Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 793



17°x45° optics

## BITPOP C 2.2

CE CB ENEC LED TECH kg 0.70 IP40  
 DALI PUSH 0/1-10V

18W 230Vac

**BC2210** White - Black  
**BC2210** Black - Black

**1F** - 2700K CRI >90  
**15** - 3000K CRI >90  
**09** - 4000K CRI 80

**S** - 17°  
**F** - 30°  
**L** - 42°  
**W** - 17°x45°

**O** - on/off  
**R** - 0/1-10V + PUSH  
**D** - DALI

1400 lm (3000K)

992 lm (3000K, 30°)

4 high-intensity power LEDs  
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in aluminium  
 trim in steel

included and wired

includes 0.30 m cable

surface mounted (ceiling)

UGR < 10 for the 17° and 30° optics

recessed version: Bitpop 2.2, p. 533  
 Casambi-compatible version, controllable with  
 the Casambi app, available on request

see p. 793

## BITPOP C 4.1

CE CB ENEC LED TECH kg 0.70 IP40  
 DALI PUSH 0/1-10V

18W 230Vac

**BC4110** White - Black  
**BC4110** Black - Black

**1F** - 2700K CRI >90  
**15** - 3000K CRI >90  
**09** - 4000K CRI 80

**S** - 17°  
**F** - 30°  
**L** - 42°  
**W** - 17°x45°

**O** - on/off  
**R** - 0/1-10V  
**D** - DALI + PUSH

1400 lm (3000K)

992 lm (3000K, 30°)

4 high-intensity power LEDs  
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in aluminium  
 trim in steel

included and wired


includes 0.30 m cable

surface mounted (ceiling)

UGR < 10 for the 17° and 30° optics

recessed version: Bitpop 4.1, p. 534  
 Casambi-compatible version, controllable with  
 the Casambi app, available on request

see p. 793







## INDOOR CEILING MOUNTED

### BITPOP C 1.0


#### S - 17°

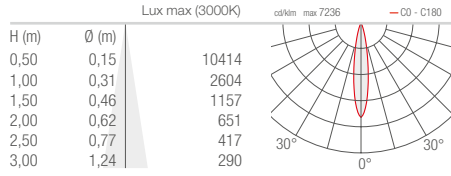


#### F - 30°

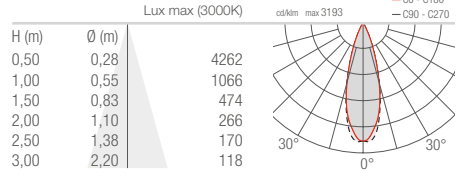

#### L - 42°

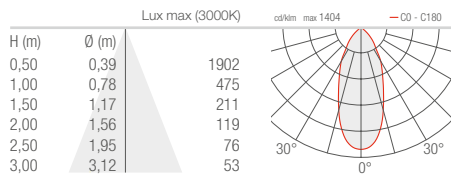


#### W - 17°x45°

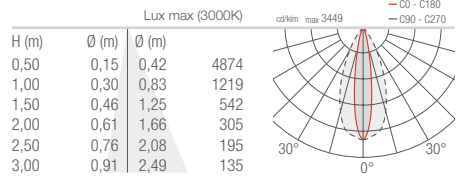


### BITPOP C 2.2 4.1


#### S - 17°

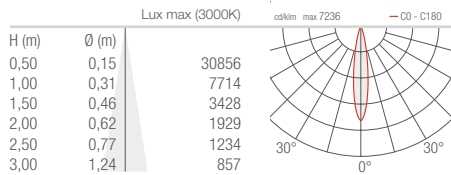

#### F - 30°

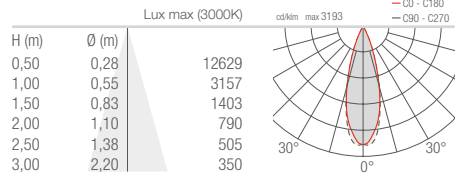

#### L - 42°

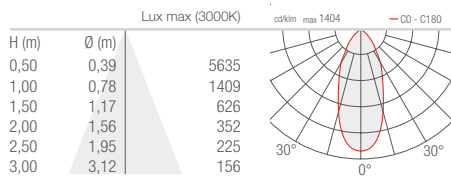

#### W - 17°x45°

