

ELLA OUT

OUTDOOR WALL MOUNTED SINGLE BEAM, DIFFUSE LIGHT



diffuse



2700K 3000K 4000K

OUTDOOR

INDOOR

WALL MOUNTED



ELLA OUT 1.0 p. 352
7W 230Vac
493 lm (3000K)



ELLA OUT 2.0 p. 353
16W 230Vac
985 lm (3000K)



ELLA OUT 3.0 p. 353
19W 230Vac
1478 lm (3000K)

ELLA IN p. 622




CEILING MOUNTED **ELLO OUT** p. 380

ELLO IN p. 658



^
ELLA OUT 1.0
 3000K, 7W, diffuse, cor-ten

Project and light planning by / Lorella Marconi,
 Cinzia Todeschini (Lucearchitettura)
 Photo by / Alessio Tamborini
 Magari Estates Hotel
 Colagnola ai Colli, Verona, Italy



ELLA OUT 1.0



CE EAC LED TECH kg 0.40 IP65 IK08
 A A+ A++

POWER / POWER SUPPLY CODE	7W 230Vac	
	EA1010 ■ D E T	White
	EA1010 ■ D F T	Grey
	EA1010 ■ D H T	Anthracite
	EA1010 ■ D T T	Cor-ten

■ LED COLOUR	F - 2700K
	5 - 3000K
	9 - 4000K

OPTICS	diffuse
---------------	---------

LUMEN OUTPUT AT SOURCE	954 lm (3000K)
DELIVERED LUMEN OUTPUT	493 lm (3000K)
NO. AND TYPE OF LED	18 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in aluminium screen in serigraphed extra-clear microprismatic glass
POWER SUPPLY UNIT	built in
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm
MOUNTING	surface mounted (wall)
ACCESSORIES	see p. 355
NOTES	indoor version: Ella IN 1.0, p. 624 ceiling-mounted version: Ello OUT 1.0, p. 382 Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 824

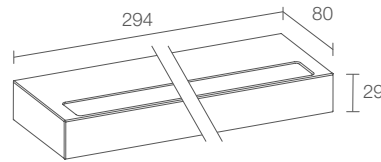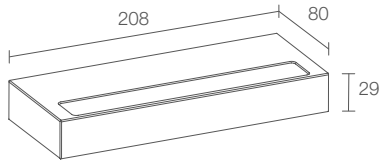

ELLA OUT 2.0



CE EAC LED TEC kg 0.80 IP65 IK08
A A+ A++

16W 230Vac
EA2010 **D E T** White
EA2010 **D F T** Grey
EA2010 **D H T** Anthracite
EA2010 **D T T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

diffuse

1908 lm (3000K)

985 lm (3000K)

36 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium
 screen in serigraphed extra-clear
 microprismatic glass

built in

includes 1.5 m neoprene cable
 H05RN-F 3x1.00 Ø7.0 mm

surface mounted (wall)

see p. 355

indoor version: Ella IN 2.0, p. 625
 ceiling-mounted version: Ella OUT 2.0, p. 383
 Casambi-compatible version, controllable with
 the Casambi app, available on request

see p. 824

ELLA OUT 3.0



CE EAC LED TEC kg 1.20 IP65 IK08
A A+ A++

19W 230Vac
EA3010 **D E T** White
EA3010 **D F T** Grey
EA3010 **D H T** Anthracite
EA3010 **D T T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

diffuse

2862 lm (3000K)

1478 lm (3000K)

54 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium
 screen in serigraphed extra-clear
 microprismatic glass

built in

includes 1.5 m neoprene cable
 H05RN-F 3x1.00 Ø7.0 mm

surface mounted (wall)

see p. 355

indoor version: Ella IN 3.0, p. 625
 ceiling-mounted version: Ella OUT 3.0, p. 383
 Casambi-compatible version, controllable with
 the Casambi app, available on request


see p. 824






ACCESSORIES


ACCESSORIES FOR INSTALLATION



WD0651E - White
WD0651F - Grey
WD0651H - Anthracite
WD0651T - Cor-ten
 Spacer for 15° inclination
 RAL finish available on request
 (Ella OUT 1.0)

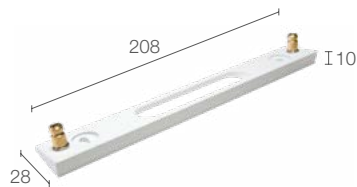

WD0652E - White
WD0652F - Grey
WD0652H - Anthracite
WD0652T - Cor-ten
 Spacer for 15° inclination
 RAL finish available on request
 (Ella OUT 2.0)

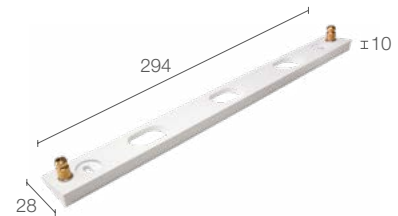

WD0653E - White
WD0653F - Grey
WD0653H - Anthracite
WD0653T - Cor-ten
 Spacer for 15° inclination
 RAL finish available on request
 (Ella OUT 3.0)

STANDARD FINISHES



White



Grey



Anthracite



Cor-ten

< ELLA OUT 2.0

3000K, 16W, diffuse, cor-ten

Project and light planning by / Lorella Marconi,
 Cinzia Todeschini (Lucearchitettura)
 Photo by / Alessio Tamborini
 Magari Estates Hotel
 Colognola ai Colli, Verona, Italy

∨ ELLA OUT 1.0

without spacer



∨ ELLA OUT 1.0

with spacer (15° inclination)




ELLA IN / ELLA OUT

INDOOR WALL MOUNTED / OUTDOOR WALL MOUNTED


ELLA IN 1.0 ELLA OUT 1.0

D - Diffuse

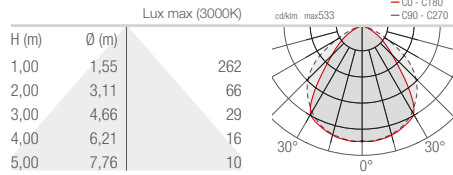

ELLA IN 2.0 ELLA OUT 2.0

D - Diffuse

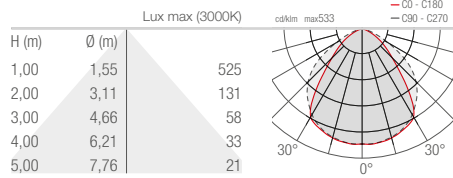

ELLA IN 3.0 ELLA OUT 3.0

D - Diffuse

