

INDOOR CEILING MOUNTED WITH DIFFUSE LIGHT



diffuse




2700K 3000K 4000K

INDOOR

OUTDOOR

CEILING MOUNTED



ELLO IN 1.0 p. 660
7W 230Vac
493 lm (3000K)



ELLO IN 2.0 p. 661
13W 230Vac
985 lm (3000K)



ELLO IN 3.0 p. 661
19W 230Vac
1478 lm (3000K)


ELLO OUT p. 380

WALL MOUNTED

ELLA IN p. 622

ELLA OUT p. 350

✓
ELLO IN 2.0
 3000K, 13W, white

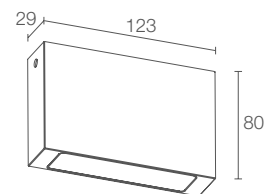

ELLO IN 1.0

CE ENEC LED TECH kg 0.40 IP40 IK08
 A A+ A++

POWER / POWER SUPPLY CODE

7W 230Vac
EP1010 **DB N** White
EP1010 **DC N** Chrome
EP1010 **D 1 N** Pure orange
EP1010 **D 2 N** Reseda green
EP1010 **D 3 N** Capri blue
EP1010 **D 4 N** Light ivory

LED COLOUR

F - 2700K
5 - 3000K
9 - 4000K

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE 954 lm (3000K)

DELIVERED LUMEN OUTPUT 493 lm (3000K)

NO. AND TYPE OF LED 18 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

MATERIAL body in aluminium
 screen in serigraphed extra-clear microprismatic glass



POWER SUPPLY UNIT built in

MOUNTING surface mounted (ceiling)

ACCESSORIES see p. 663

NOTES outdoor version: Ello OUT 1.0, p. 382
 wall-mounted version: Ella IN 1.0, p. 624
 Casambi-compatible version, controllable with the Casambi app, available on request

PHOTOMETRIC DATA see p. 825

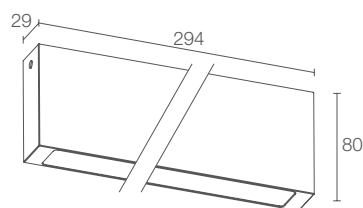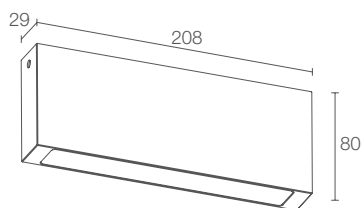

ELLO IN 2.0

CE ENEC LED TECH kg 0.80 IP40 IK08

- 13W 230Vac
- EP2010** **D B N** White
- EP2010** **D C N** Chrome
- EP2010** **D 1 N** Pure orange
- EP2010** **D 2 N** Reseda green
- EP2010** **D 3 N** Capri blue
- EP2010** **D 4 N** Light ivory

F - 2700K
5 - 3000K
9 - 4000K

diffuse

1908 lm (3000K)

985 lm (3000K)

36 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium
 screen in serigraphed extra-clear microprismatic glass

built in

surface mounted (ceiling)

see p. 663

outdoor version: Ello OUT 2.0, p. 383
 wall-mounted version: Ella IN 2.0, p. 625
 Casambi-compatible version, controllable with
 the Casambi app, available on request

see p. 825

ELLO IN 3.0

CE ENEC LED TECH kg 1.20 IP40 IK08

- 19W 230Vac
- EP3010** **D B N** White
- EP3010** **D C N** Chrome
- EP3010** **D 1 N** Pure orange
- EP3010** **D 2 N** Reseda green
- EP3010** **D 3 N** Capri blue
- EP3010** **D 4 N** Light ivory

F - 2700K
5 - 3000K
9 - 4000K

diffuse

2862 lm (3000K)

1478 lm (3000K)

54 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium
 screen in serigraphed extra-clear microprismatic glass

built in

surface mounted (ceiling)

see p. 663

outdoor version: Ello OUT 3.0, p. 383
 wall-mounted version: Ella IN 3.0, p. 625
 Casambi-compatible version, controllable with
 the Casambi app, available on request


see p. 825






ACCESSORIES


ACCESSORIES FOR INSTALLATION

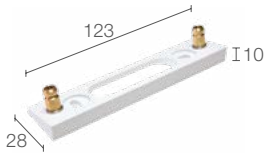

WD0601B - White
WD0601C - Chrome
WD06011 - Pure orange
WD06012 - Reseda green
WD06013 - Capri blue
WD06014 - Light ivory
 Spacer for 15° inclination
 RAL finish available on request
 (Ello IN 1.0)

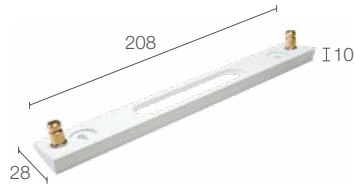

WD0602B - White
WD0602C - Chrome
WD06021 - Pure orange
WD06022 - Reseda green
WD06023 - Capri blue
WD06024 - Light ivory
 Spacer for 15° inclination
 RAL finish available on request
 (Ello IN 2.0)

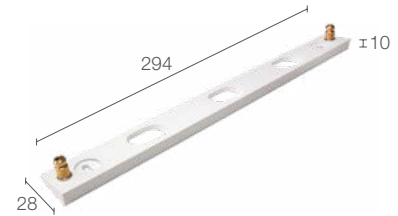

WD0603B - White
WD0603C - Chrome
WD06031 - Pure orange
WD06032 - Reseda green
WD06033 - Capri blue
WD06034 - Light ivory
 Spacer for 15° inclination
 RAL finish available on request
 (Ello IN 3.0)

∨
ELLO IN 1.0
 with spacer (15° inclination)



STANDARD FINISHES



White




Chrome



Pure orange



Reseda green



Capri blue




Light ivory

< **ELLO IN 3.0**
 3000K, 19W, white
 Private residence, Milan, Italy


ELLO IN 1.0 ELLO OUT 1.0

D - Diffuse

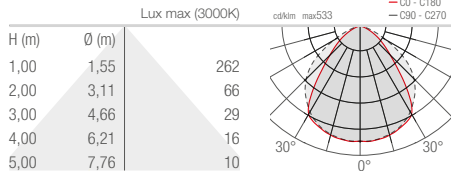

ELLO IN 2.0 ELLO OUT 2.0

D - Diffuse

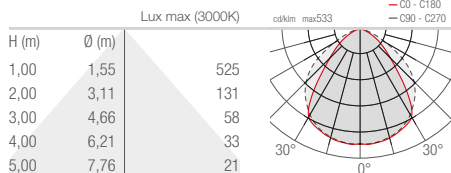

ELLO IN 3.0 ELLO OUT 3.0

D - Diffuse

