





OUTDOOR PROJECTORS ACCENT LIGHTING FOR GARDENS



**WITHOUT BASE
FOR CONNECTIONS**

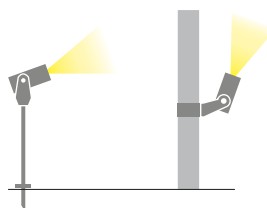


**WITH BASE
FOR CONNECTIONS**



FLORI 1.0 p. 284
7W 230Vac



FLORI 1.1 p. 284
7W 230Vac




FLORI 1.2 p. 285
13W 24Vdc






FLORI 1.3 p. 285
13W 24Vdc

< **FLORI 1.0**
3000K, 7W, 15°, cor-ten
with spike for in-ground installation

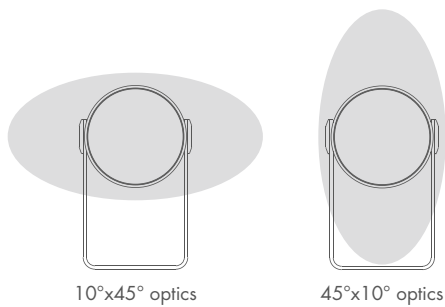

10°x45° optics

45°x10° optics

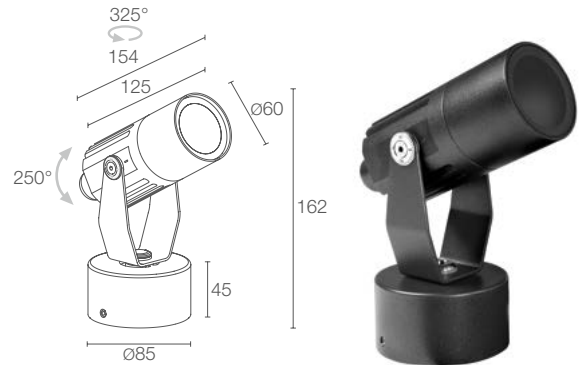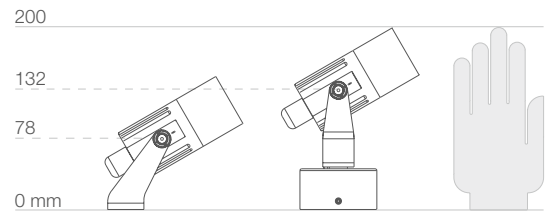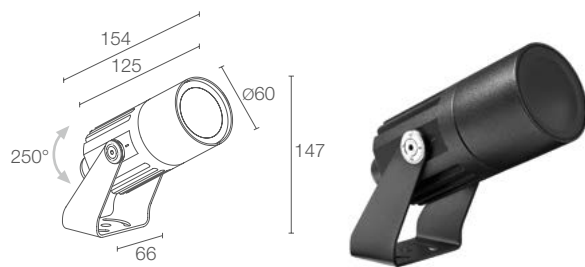

FLORI 1.0



POWER / POWER SUPPLY CODE

7W 230Vac
FS1010 E - White
FS1010 F - Grey
FS1010 H - Anthracite
FS1010 T - Cor-ten

CRI	0 - CRI 80 1 - CRI >90
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	V - 9° S - 15° M - 31° L - 36° W - 10°x45° X - 45°x10°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm 1 - 5 m

LUMEN OUTPUT AT SOURCE	657 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	366 lm (3000K, 31°, CRI 80)
NO. AND TYPE OF LED	1 high-intensity power LED 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground, spike, strap)
ACCESSORIES	see p. 289
NOTES	version with 24Vdc power supply available on request Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 829


FLORI 1.1



7W 230Vac
FS1110 E - White
FS1110 F - Grey
FS1110 H - Anthracite
FS1110 T - Cor-ten



CRI	0 - CRI 80 1 - CRI >90
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	V - 9° S - 15° M - 31° L - 36° W - 10°x45° X - 45°x10°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm 1 - 5 m

LUMEN OUTPUT AT SOURCE	657 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	366 lm (3000K, 31°, CRI 80)
NO. AND TYPE OF LED	1 high-intensity power LED 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	see p. 289
NOTES	version with 24Vdc power supply available on request Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 829

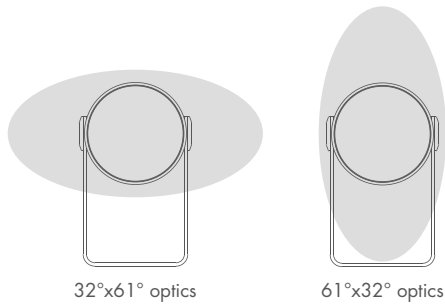

32°x61° optics

61°x32° optics

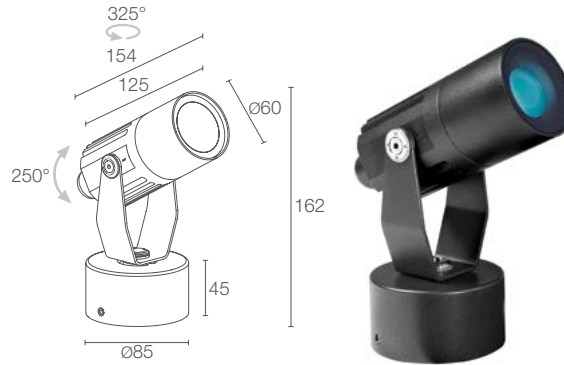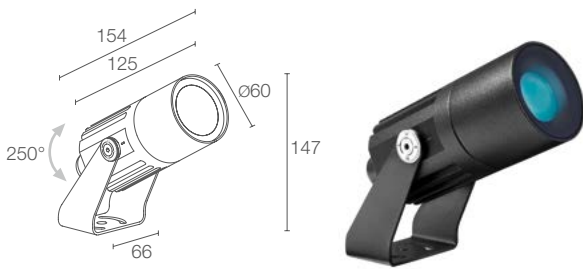

FLORI 1.2

FLORI 1.3

13W 24Vdc
FS1200 7 E White
FS1200 7 F Grey
FS1200 7 H Anthracite
FS1200 7 T Cor-ten

13W 24Vdc
FS1300 7 E White
FS1300 7 F Grey
FS1300 7 H Anthracite
FS1300 7 T Cor-ten

RGBW

RGBW

S - 24°
M - 33°
L - 60°
W - 32°x61°
X - 61°x32°

S - 24°
M - 33°
L - 60°
W - 32°x61°
X - 61°x32°

includes 1.5 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm

includes 1.5 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm

512 lm, R: 88 lm G: 160 lm B: 52 lm W: 212 lm (4000K)

512 lm, R: 88 lm G: 160 lm B: 52 lm W: 212 lm (4000K)

304 lm, R: 52 lm G: 95 lm B: 31 lm W: 126 lm (4000K, 33°)

304 lm, R: 52 lm G: 95 lm B: 31 lm W: 126 lm (4000K, 33°)

1 RGBW LED group 50000h l85 B10 (Ta 25°C)

1 RGBW LED group 50000h l85 B10 (Ta 25°C)

body in aluminium screen in serigraphed and transparent, tempered extra-clear glass

body in aluminium screen in serigraphed and transparent, tempered extra-clear glass

not included, see p. 904 and 917

not included, see p. 904 and 917

surface mounted (ceiling, wall, ground, spike, strap)

surface mounted (ceiling, wall, ground)

see p. 289

see p. 289

Casambi-compatible version, controllable with the Casambi app, available on request

Casambi-compatible version, controllable with the Casambi app, available on request

see p. 829

see p. 829









PIZ LAILA

2100



ACCESSORIES

ANTI-GLARE ACCESSORIES



WHA0005


Flori 1.0 / 1.1
(15°, 31°, 36°, 10°x45° e 45°x10° optics)

WH0203


Flori 1.0 / 1.1 (9° optics)
Flori 1.2 / 1.3

Honeycomb louvre
built into the lighting fixture

order together with
the lighting fixture



WB1001E - White
WB1001F - Grey
WB1001H - Anthracite
WB1001T - Cor-ten
Standard snoot



WB1002E - White
WB1002F - Grey
WB1002H - Anthracite
WB1002T - Cor-ten
Asymmetrical snoot




WB1003N - Black
Barn doors

ACCESSORIES FOR INSTALLATION Flori 1.0 / 1.2



WP0100

Spike for
in-ground installation



h 500 mm
WP1001E - White
WP1001F - Grey
WP1001H - Anthracite
WP1001T - Cor-ten
h 800 mm
WP1002E - White
WP1002F - Grey
WP1002H - Anthracite
WP1002T - Cor-ten
Spike with bracket for
in-ground installation



h 420 mm
WP1003E - White
WP1003F - Grey
WP1003H - Anthracite
WP1003T - Cor-ten
Arm with bracket for
wall-mounted installation



WP1004
Fastener
strap - 5 m

Flori mounted on spike with bracket
for in-ground installation



page 286
FLORI 1.0
3000K, 7W, 31°, anthracite
with spike for in-ground installation

< **FLORI 1.2**
RGBW, 13W, 32°x61°, anthracite


Photo by / ©Federico Covre
Club Moritzino, Piz La Ila, Badia, Bolzano, Italy




OUTDOOR PROJECTORS

FLORI 1.0 1.1


V - 9° CRI 80

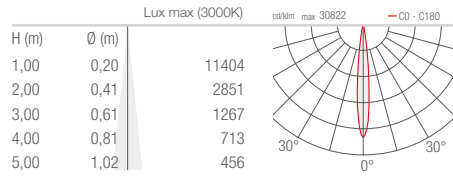


S - 15° CRI 80

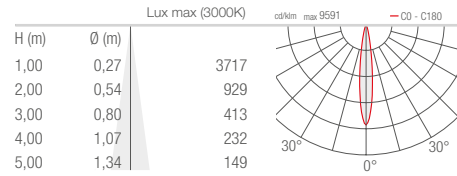


M - 31° CRI 80

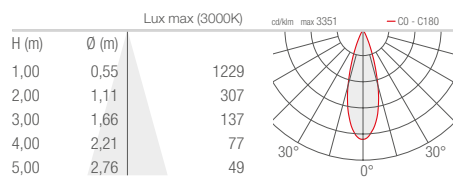


L - 36° CRI 80

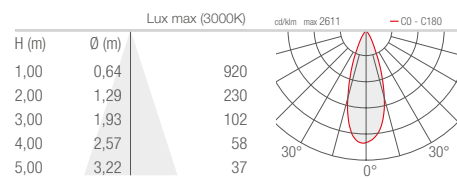

W - 10°x45° CRI 80

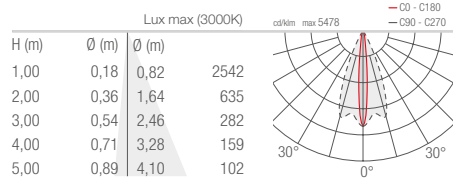


X - 45°x10° CRI 80

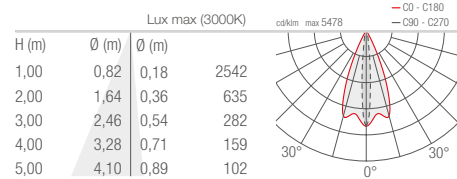


FLORI 1.2 1.3


S - 24°

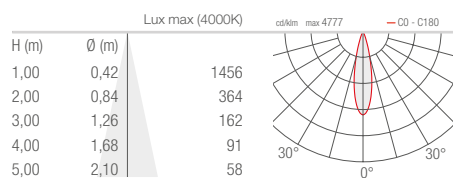


M - 33°

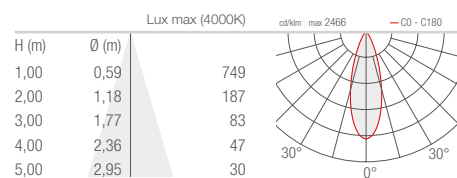

L - 60°

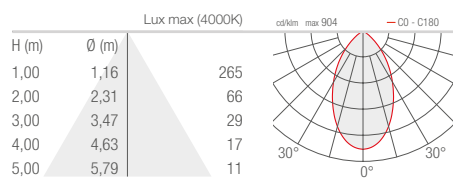

W - 32°x61°

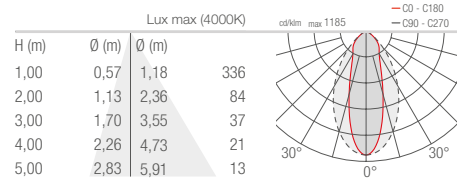

X - 61°x32°

