




^
NEVA 1.0
 3000K, 18W, 10°x40°
NEVA MINI 1
 3000K, 9W, 11°



PITCH 60 mm



PITCH 120 mm



PITCH 60 mm
 BUILT-IN POWER SUPPLY UNIT

316 mm



NEVA MINI 1 p. 188
 9W/13W 24Vdc



NEVA MINI 2 p. 190
 5.5W/7.5W 24Vdc

616 mm
 677 mm



NEVA 1.0 p. 188
 18W/25W 24Vdc



NEVA 2.0 p. 190
 11W/15W 24Vdc



NEVA 3.0 p. 194
 23W 230Vac
 ON/OFF, 0/1-10V

916 mm
 1037 mm



NEVA 1.1 p. 189
 27W/38W 24Vdc



NEVA 2.1 p. 191
 16W/22W 24Vdc



NEVA 3.1 p. 195
 39W 230Vac
 ON/OFF, 0/1-10V

1517 mm
 1758 mm



NEVA 1.2 p. 189
 45W/63W 24Vdc



NEVA 2.2 p. 191
 27W/38W 24Vdc



NEVA 3.2 p. 195
 64W 230Vac
 ON/OFF

OUTDOOR LINEAR PROFILES ARCHITECTURAL LIGHTING FOR WALLS AND FACADES

2700K 3000K 4000K

PITCH 120 mm

BUILT-IN POWER SUPPLY UNIT



RGB

PITCH 120 mm



DYNAMIC WHITE

PITCH 120 mm



RGBW


PITCH 120 mm



NEVA MINI 5 p. 198
10W 24Vdc



NEVA MINI 6 p. 200
10W 24Vdc



NEVA MINI 7 p. 202
15W 24Vdc



NEVA 4.0 p. 196
16W 230Vac
ON/OFF, 0/1-10V



NEVA 5.0 p. 198
20W 24Vdc
with or without DMX



NEVA 6.0 p. 200
20W 24Vdc



NEVA 7.0 p. 202
30W 24Vdc



NEVA 4.1 p. 197
24W 230Vac
ON/OFF, 0/1-10V



NEVA 5.1 p. 199
30W 24Vdc



NEVA 6.1 p. 201
30W 24Vdc



NEVA 7.1 p. 203
45W 24Vdc




NEVA 4.2 p. 197
40W 230Vac
ON/OFF, 0/1-10V





NEVA 5.2 p. 199
50W 24Vdc



NEVA 6.2 p. 201
50W 24Vdc



NEVA 7.2 p. 203
75W 24Vdc

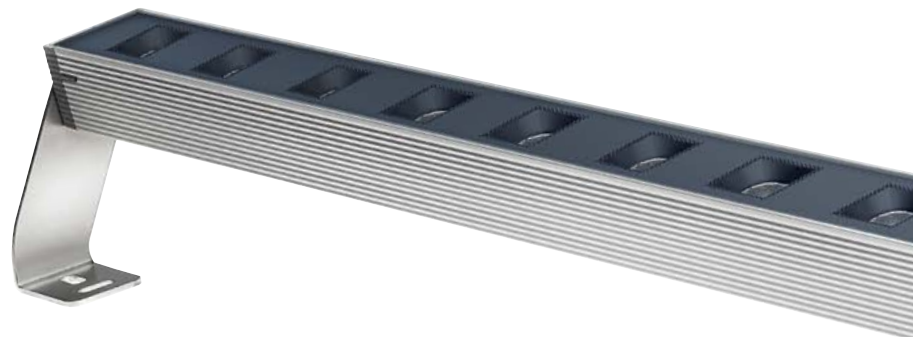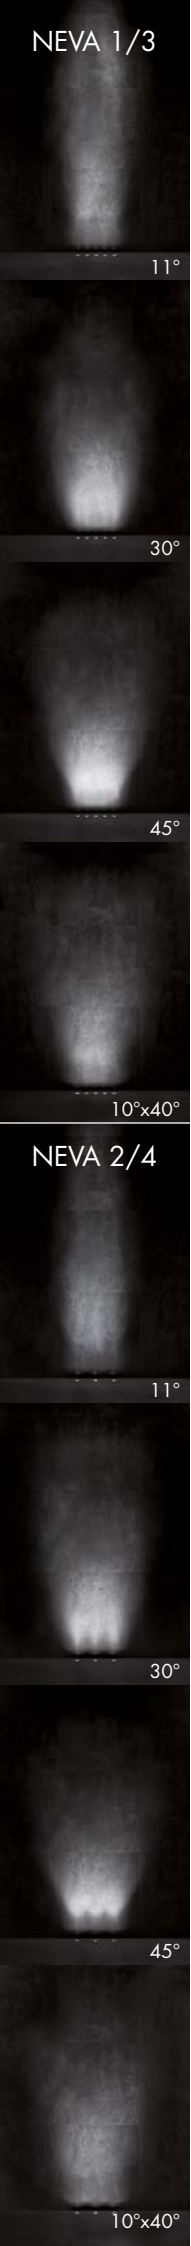

IP65 / IP67
SUITABLE FOR OUTDOOR APPLICATIONS



BUILT-IN PROTECTION SYSTEMS:
IPS
INTELLIGENT PROTECTION SYSTEM



PID
PROTECTIVE IMPEDANCE DEVICE



NTC
BUILT-IN TEMPERATURE SENSOR



IK06 (NEVA 1 / 2 / 5 / 6 / 7)



IK08 (NEVA 3 / 4)

HIGH-TRANSMITTANCE, TRANSPARENT, TEMPERED
EXTRA-CLEAR GLASS SCREEN WITH VITRIFIED SERIGRAPHY
TO ENSURE CHROMATIC UNIFORMITY OF LIGHT. THE GLASS'S
THICKNESS OF 4 MM GUARANTEES HIGH IMPACT RESISTANCE

BODY IN LOW-COPPER-CONTENT
ANTICORODAL ALUMINIUM ALLOY 6060
FOR EXCELLENT CORROSION RESISTANCE
AND IMPROVED HEAT DISSIPATION.
THE ANODIZATION PROCESS PROTECTS
THE FIXTURE'S FUNCTIONING AND
APPEARANCE FROM ATMOSPHERIC
AND ENVIRONMENTAL CONDITIONS

UNIQUE SELLING POINTS



ANTI-GLARE
RECESSED OPTICS



NEVA 1 / 3
PITCH CONSISTENCY
BETWEEN DEVICES
PLACED SIDE BY SIDE



NEVA 3 / 4
IP68 CONNECTOR WITH
BUILT-IN IPS PROTECTION
Speedy installation: electrical wiring simplified by the ability to connect the electrical cables directly to the connector. An in/out connection system is available to install the fixtures in a line.



RECESSED
INSTALLATION
USING DEDICATED
OUTER CASING



SCALED ADJUSTABLE
BRACKET AND TWO
DIFFERENT HEIGHTS:
75 MM, 140 MM





ANTI-GLARE
HONEYCOMB
LOUVRE ACCESSORY



< **NEVA 1.1**
2700K, 27W, 10°x40°, with honeycomb louvre
customized version with CRI >90

BRIGHT 1.6
2700K, 2W, 10°

Light planning by / Susanna Antico
Lighting Design Studio
Cascina Ranverso
Butigliera Alta, Turin, Italy

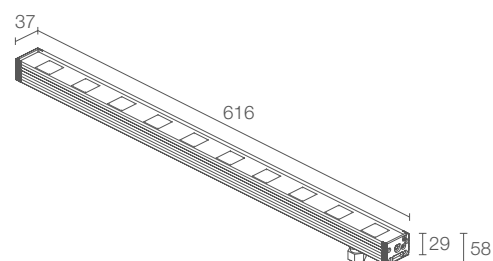

NEVA MINI 1



POWER / POWER SUPPLY CODE	9W 24Vdc 316 mm pitch 60 NV0100 ■ ■ ■ A - ■ ■ 13W 24Vdc 316 mm pitch 60 NV0101 ■ ■ ■ A - ■ ■
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° M - 30° L - 45° W - 10°x40°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m



LUMEN OUTPUT AT SOURCE	696 lm (3000K, 9W) 1033 lm (3000K, 13W)
DELIVERED LUMEN OUTPUT	575 lm (3000K, 30°, 9W) 805 lm (3000K, 30°, 13W)
NO. AND TYPE OF LED	5 power LEDs, pitch 60 mm 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see p. 204 and 205
PHOTOMETRIC DATA	see p. 853

NEVA 1.0



POWER / POWER SUPPLY CODE	18W 24Vdc 616 mm pitch 60 NV1000 ■ ■ ■ A - ■ ■ 25W 24Vdc 616 mm pitch 60 NV1001 ■ ■ ■ A - ■ ■
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° M - 30° L - 45° W - 10°x40°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

LUMEN OUTPUT AT SOURCE	1392 lm (3000K, 18W) 2065 lm (3000K, 25W)
DELIVERED LUMEN OUTPUT	1150 lm (3000K, 30°, 18W) 1610 lm (3000K, 30°, 25W)
NO. AND TYPE OF LED	10 power LEDs, pitch 60 mm 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see p. 204 and 205
PHOTOMETRIC DATA	see p. 853

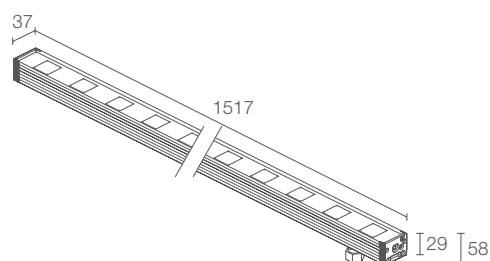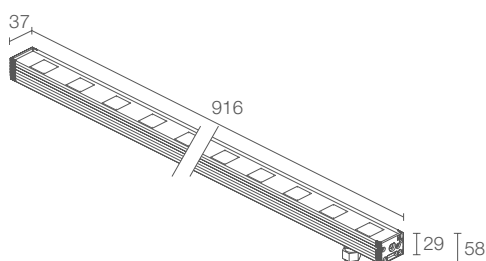

NEVA 1.1

kg 1.64 IP65 IP67 IK06
 NTC CASAMBI (T max 45°C)

27W 24Vdc 916 mm pitch 60

NV1100 **A - ■**

38W 24Vdc 916 mm pitch 60

NV1101 **A - ■**

	F - 2700K 5 - 3000K 9 - 4000K
	S - 11° M - 30° L - 45° W - 10°x40°
	includes 1.5 m neoprene cable H05RN-F 2x0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

2087 lm (3000K, 27W)
3098 lm (3000K, 38W)

1715 lm (3000K, 30°, 27W)
2401 lm (3000K, 30°, 38W)

15 power LEDs, pitch 60 mm
3-step MacAdam, 50000h L90 B10 (Ta 25°C)

body in anodized anticorrosion aluminium
screen in serigraphed and transparent, tempered
extra-clear glass

not included, see p. 904

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

see p. 855

NEVA 1.2

kg 2.75 IP65 IP67 IK06
 NTC CASAMBI (T max 45°C)

45W 24Vdc 1517 mm pitch 60

NV1200 **A - ■**

63W 24Vdc 1517 mm pitch 60

NV1201 **A - ■**

	F - 2700K 5 - 3000K 9 - 4000K
	S - 11° M - 30° L - 45° W - 10°x40°
	includes 1.5 m neoprene cable H05RN-F 2x0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

3479 lm (3000K, 45W)
5163 lm (3000K, 63W)

2875 lm (3000K, 30°, 45W)
4025 lm (3000K, 30°, 63W)

25 power LEDs, pitch 60 mm
3-step MacAdam, 50000h L90 B10 (Ta 25°C)

body in anodized anticorrosion aluminium
screen in serigraphed and transparent, tempered
extra-clear glass

not included, see p. 904

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing



see p. 204 and 205

see p. 855



< **NEVA 2.0**
3000K, 11W, 45°, with brackets
BRIGHT 2.4
3000K, 7W, 11° - 45°, stainless steel

Project by / arch. Fernanda Cantone
Light planning by / Light Style
Castello Tafuri Charming Suites
Portopalo di Capo Passero, Syracuse, Italy

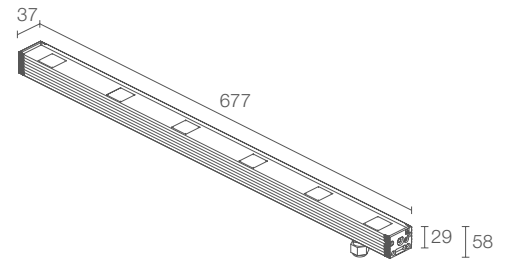

NEVA MINI 2



POWER / POWER SUPPLY CODE
5.5W 24Vdc 316 mm pitch 120
NV0200 ■ ■ ■ A - ■ ■
7.5W 24Vdc 316 mm pitch 120
NV0201 ■ ■ ■ A - ■ ■

LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° M - 30° L - 45° W - 10°x40°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

LUMEN OUTPUT AT SOURCE	418 lm (3000K, 5.5W) 620 lm (3000K, 7.5W)
DELIVERED LUMEN OUTPUT	345 lm (3000K, 30°, 5.5W) 483 lm (3000K, 30°, 7.5W)
NO. AND TYPE OF LED	3 power LEDs, pitch 120 mm 3-step MacAdam 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosional aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see p. 204 and 205
PHOTOMETRIC DATA	see p. 853



NEVA 2.0



11W 24Vdc 677 mm pitch 120
NV2000 ■ ■ ■ A - ■ ■
15W 24Vdc 677 mm pitch 120
NV2001 ■ ■ ■ A - ■ ■

LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° M - 30° L - 45° W - 10°x40°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

LUMEN OUTPUT AT SOURCE	835 lm (3000K, 11W) 1239 lm (3000K, 15W)
DELIVERED LUMEN OUTPUT	690 lm (3000K, 30°, 11W) 966 lm (3000K, 30°, 15W)
NO. AND TYPE OF LED	6 power LEDs, pitch 120 mm 3-step MacAdam 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosional aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see p. 204 and 205
PHOTOMETRIC DATA	see p. 855

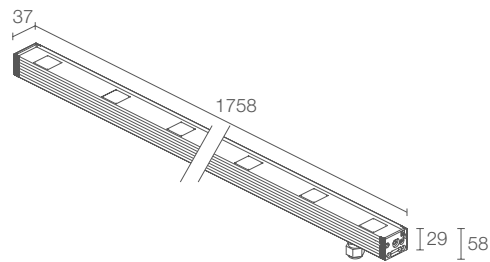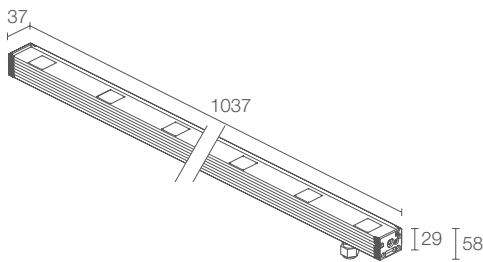

NEVA 2.1



kg 1.87 IP65 IP67 IK06

A A+ A++ **IP** **PID** NTC CASAMBI T max 45°C

16W 24Vdc 1037 mm pitch 120

NV2100 ■ ■ ■ A - ■

22W 24Vdc 1037 mm pitch 120

NV2101 ■ ■ ■ A - ■

■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 11° M - 30° L - 45° W - 10°x40°
■	includes 1.5 m neoprene cable H05RN-F 2x0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

1252 lm (3000K, 16W)
1859 lm (3000K, 22W)

1035 lm (3000K, 30°, 16W)
1450 lm (3000K, 30°, 22W)

9 power LEDs, pitch 120 mm
3-step MacAdam
50000h L90 B10 (Ta 25°C)

body in anodized anticorrosion aluminium
screen in serigraphed and transparent, tempered
extra-clear glass

not included, see p. 904

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

see p. 855

NEVA 2.2



kg 3.15 IP65 IP67 IK06

A A+ A++ **IP** **PID** NTC CASAMBI T max 45°C

27W 24Vdc 1758 mm pitch 120

NV2200 ■ ■ ■ A - ■

38W 24Vdc 1758 mm pitch 120

NV2201 ■ ■ ■ A - ■

■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 11° M - 30° L - 45° W - 10°x40°
■	includes 1.5 m neoprene cable H05RN-F 2x0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

2087 lm (3000K, 27W)
3098 lm (3000K, 38W)

1725 lm (3000K, 30°, 27W)
2415 lm (3000K, 30°, 38W)

15 power LEDs, pitch 120 mm
3-step MacAdam
50000h L90 B10 (Ta 25°C)

body in anodized anticorrosion aluminium
screen in serigraphed and transparent, tempered
extra-clear glass

not included, see p. 904

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

see p. 855






NEVA 2.2

4000K, 38W, 11°, with brackets

Photo by / Piero Bosco
(Aternum Fotoamatori Abruzzesi)
Murap festival, Pescara, Italy

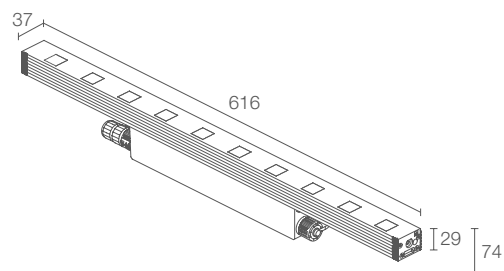

NEVA 3.0




kg 1.60 IP65 IP67 IK08

A A+ A++ 0/1-10V

POWER / POWER SUPPLY CODE	23W 230Vac 616 mm pitch 60 ON/OFF
	NV3010000 ■ ■ 0 ■ N Anodized black
	23W 230Vac 616 mm pitch 60 0/1-10V
	NV30100V0 ■ ■ 0 ■ N Anodized black

■ HONEYCOMB LOUVRE	0 - not present 1 - present
■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	S - 11° M - 30° L - 45° W - 10°x40°

LUMEN OUTPUT AT SOURCE	2570 lm (3000K)
DELIVERED LUMEN OUTPUT	1610 lm (3000K, 30°)
NO. AND TYPE OF LED	10 power LEDs, pitch 60 mm 3-step MacAdam, 50000h L85 B10 (Ta 25°C)
MATERIAL	body in black-anodized anticorrosive aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see p. 204 and 205
FEATURES	fast installation: direct connection between fixture and mains power supply
PHOTOMETRIC DATA	see p. 855

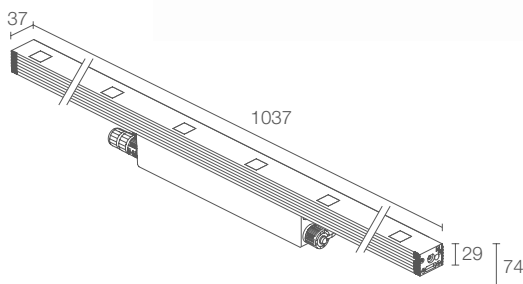

NEVA 4.1



kg 2.34 IP65 IP67 IK08

A A+ A++ 0/1-10V

24W 230Vac 1037 mm pitch 120 ON/OFF
NV4110000 ■ ■ ■ ■ ■ Anodized black

24W 230Vac 1037 mm pitch 120 0/1-10V
NV41100V0 ■ ■ ■ ■ ■ Anodized black

■	0 - not present 1 - present
■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 11° M - 30° L - 45° W - 10°x40°

2313 lm (3000K)

1450 lm (3000K, 30°)

9 power LEDs, pitch 120 mm
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized anticorrosional aluminium
 screen in serigraphed and transparent,
 tempered extra-clear glass


built in

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

fast installation: direct connection between
 fixture and mains power supply

see p. 856

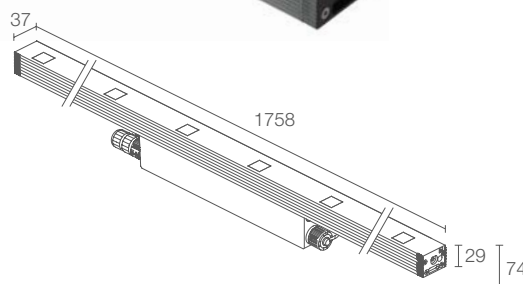

NEVA 4.2



kg 3.62 IP65 IP67 IK08

A A+ A++ 0/1-10V

40W 230Vac 1758 mm pitch 120 ON/OFF
NV4210000 ■ ■ ■ ■ ■ Anodized black

40W 230Vac 1758 mm pitch 120 0/1-10V
NV42100V0 ■ ■ ■ ■ ■ Anodized black

■	0 - not present 1 - present
■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 11° M - 30° L - 45° W - 10°x40°

3855 lm (3000K)

2415 lm (3000K, 30°)

15 power LEDs, pitch 120 mm
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized anticorrosional aluminium
 screen in serigraphed and transparent,
 tempered extra-clear glass


built in

surface mounted (ceiling, wall, ground) with brackets
 recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

fast installation: direct connection between
 fixture and mains power supply

see p. 856






< **NEVA 5.2**
RGB, 50W, 24°x46°, with brackets

NEVA 2.2
3000K, 27W, 11°, with brackets

Project by / architects
Gotha Cosmetics Headquarters
Bergamo, Italy



NEVA MINI 5



NEVA 5.0



POWER / POWER SUPPLY CODE

10W 24Vdc 316 mm pitch 120
NV0500 6 ■ A - ■

20W 24Vdc 677 mm pitch 120
NV5000 6 ■ A - ■

20W 24Vdc + DMX512 677 mm pitch 120
NV5001 6 ■ A

OPTICS

S - 15°
M - 26°
L - 30°
W - 24°x46°

S - 15°
M - 26°
L - 30°
W - 24°x46°

POWER CABLES

includes 1.5 m neoprene cable
05RN-F 4x0.50 Ø5.8 mm
1 - 5 m
2 - 10 m
3 - 15 m
4 - 20 m

includes 1.5 m neoprene cable 05RN-F 4x0.50 Ø5.8 mm
DMX version: includes 2x1.5 m neoprene cables
H05RN-F 2x0.75 Ø6.3 mm and 05RN-F 4x0.50 Ø5.8
1 - 5 m
2 - 10 m
3 - 15 m
4 - 20 m



LED COLOUR

RGB

RGB

LUMEN OUTPUT AT SOURCE	454 lm, R: 151 lm G: 227 lm B: 76 lm
DELIVERED LUMEN OUTPUT	324 lm, R: 108 lm G: 162 lm B: 54 lm (26°)
NO. AND TYPE OF LED	3 RGB LED groups, pitch 120 mm 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904 and 917
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see p. 204 and 205
PHOTOMETRIC DATA	see p. 853

LUMEN OUTPUT AT SOURCE	908 lm, R: 303 lm G: 454 lm B: 151 lm
DELIVERED LUMEN OUTPUT	648 lm, R: 216 lm G: 324 lm B: 108 lm (26°)
NO. AND TYPE OF LED	6 RGB LED groups, pitch 120 mm 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904 and 917
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see p. 204 and 205
PHOTOMETRIC DATA	see p. 856

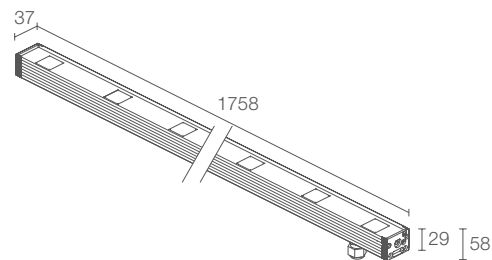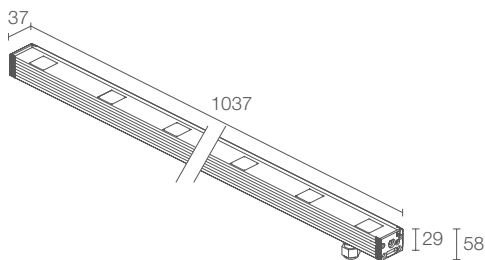

NEVA 5.1



kg 1.87 IP65 IP67 IK06

A A+ A++ NTC CASAMBI T max 45°C

30W 24Vdc 1037 mm pitch 120

NV5100 6 ■ A - ■

■ **S** - 15°
M - 26°
L - 30°
W - 24°x46°

- includes 1.5 m neoprene cable 05RN-F 4x0.50 Ø5.8 mm
- 1** - 5 m
- 2** - 10 m
- 3** - 15 m
- 4** - 20 m

RGB

1363 lm, R: 455 lm G: 681 lm B: 227 lm

972 lm, R: 324 lm G: 486 lm B: 162 lm (26°)

9 RGB LED groups, pitch 120 mm
50000h L90 B10 (Ta 25°C)

body in anodized anticorrosion aluminium
screen in serigraphed and transparent,
tempered extra-clear glass

not included, see p. 904 and 917

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

see p. 856

NEVA 5.2



kg 3.15 IP65 IP67 IK06

A A+ A++ NTC CASAMBI T max 45°C

50W 24Vdc 1758 mm pitch 120

NV5200 6 ■ A - ■

■ **S** - 15°
M - 26°
L - 30°
W - 24°x46°

- includes 1.5 m neoprene cable 05RN-F 4x0.50 Ø5.8 mm
- 1** - 5 m
- 2** - 10 m
- 3** - 15 m
- 4** - 20 m

RGB

2271 lm, R: 758 lm G: 1135 lm B: 378 lm

1620 lm, R: 540 lm G: 810 lm B: 270 lm (26°)

15 RGB LED groups, pitch 120 mm
50000h L90 B10 (Ta 25°C)


body in anodized anticorrosion aluminium
screen in serigraphed and transparent,
tempered extra-clear glass

not included, see p. 904 and 917



surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

see p. 856

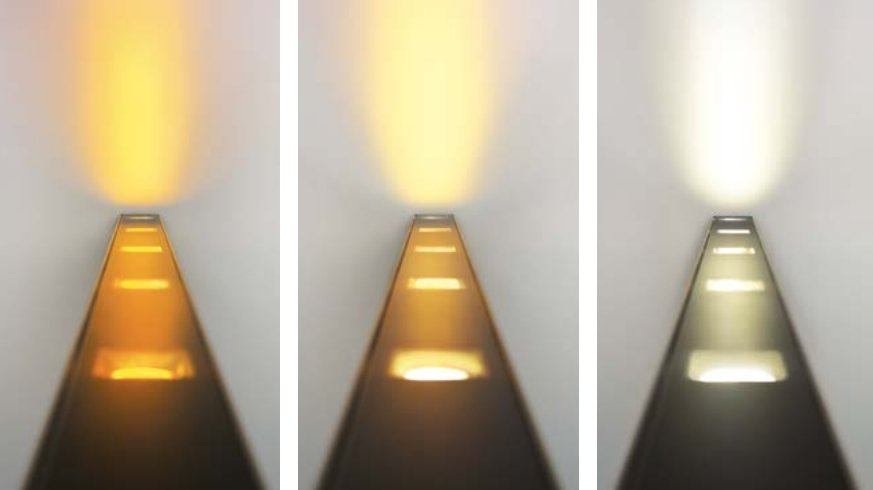

< **NEVA 6.0**
dynamic white, 20W, 24°x46°

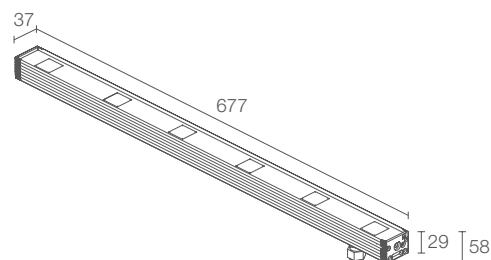

NEVA MINI 6



kg 0.58 IP65 IP67 IK06

A A+ A++ IPS NTC CASAMBI T max 45°C

POWER / POWER SUPPLY CODE 10W 24Vdc 316 mm pitch 120
NV0600 H ■ A - ■

■ **OPTICS**
S - 15°
M - 26°
L - 30°
W - 24°x46°

■ **POWER CABLES**
includes 1.5 m neoprene cable
05RN-F 4x0.50 Ø5.8 mm
1 - 5 m
2 - 10 m
3 - 15 m
4 - 20 m

LED COLOUR dynamic white: amber, 4000K, 5000K

LUMEN OUTPUT AT SOURCE 1035 lm,
amber: 258 lm 4000K: 379 lm 5000K: 398 lm
(4000K)

DELIVERED LUMEN OUTPUT 737 lm,
amber: 184 lm 4000K: 270 lm 5000K: 283 lm
(4000K, 26°)

NO. AND TYPE OF LED 3 LED groups, pitch 120 mm
50000h L90 B10 (Ta 25°C)

MATERIAL body in anodized anticorrosional aluminium
screen in serigraphed and transparent,
tempered extra-clear glass


POWER SUPPLY UNIT not included, see p. 904 and 917

MOUNTING surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

ACCESSORIES see p. 204 and 205

PHOTOMETRIC DATA see p. 854

NEVA 6.0



kg 1.25 IP65 IP67 IK06

A A+ A++ IPS NTC CASAMBI T max 45°C

20W 24Vdc 677 mm pitch 120
NV6000 H ■ A - ■

■ **OPTICS**
S - 15°
M - 26°
L - 30°
W - 24°x46°

■ **POWER CABLES**
includes 1.5 m neoprene cable
05RN-F 4x0.50 Ø5.8 mm
1 - 5 m
2 - 10 m
3 - 15 m
4 - 20 m

LED COLOUR dynamic white: amber, 4000K, 5000K

2070 lm,
amber: 517 lm 4000K: 758 lm 5000K: 795 lm
(4000K)

1475 lm,
amber: 368 lm 4000K: 540 lm 5000K: 567 lm
(4000K, 26°)

6 LED groups, pitch 120 mm
50000h L90 B10 (Ta 25°C)




body in anodized anticorrosional aluminium
screen in serigraphed and transparent,
tempered extra-clear glass

not included, see p. 904 and 917

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

see p. 857

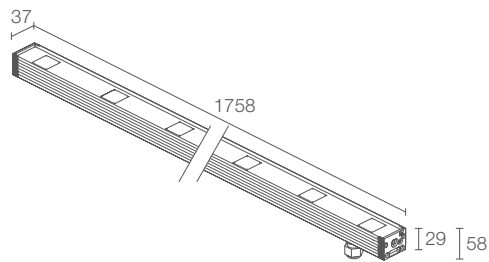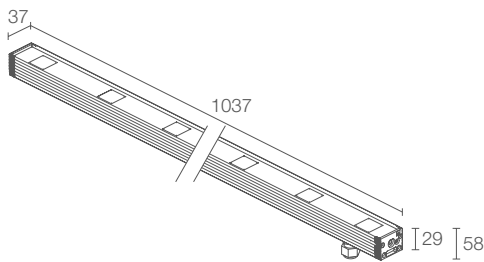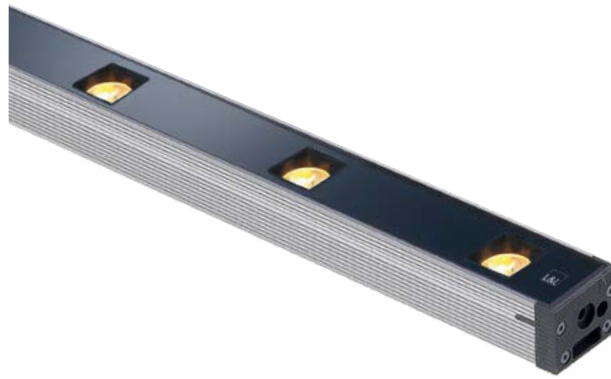

NEVA 6.1



kg 1.87 IP65 IP67 IK06

A A+ A++ NTC CASAMBI

30W 24Vdc 1037 mm pitch 120

NV6100 H ■ A - ■

■ **S** - 15°
M - 26°
L - 30°
W - 24°x46°

■ includes 1.5 m neoprene cable
05RN-F 4x0.50 Ø5.8 mm

1 - 5 m
2 - 10 m
3 - 15 m
4 - 20 m

dynamic white: amber, 4000K, 5000K

3100 lm,
amber: 774 lm 4000K: 1135 lm 5000K: 1191 lm
(4000K)

2212 lm,
amber: 552 lm 4000K: 810 lm 5000K: 850 lm
(4000K, 26°)

9 LED groups, pitch 120 mm
50000h L90 B10 (Ta 25°C)

body in anodized anticorrosional aluminium
screen in serigraphed and transparent,
tempered extra-clear glass

not included, see p. 904 and 917

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

see p. 857

NEVA 6.2



kg 3.15 IP65 IP67 IK06

A A+ A++ NTC CASAMBI

50W 24Vdc 1758 mm pitch 120

NV6200 H ■ A - ■

■ **S** - 15°
M - 26°
L - 30°
W - 24°x46°

■ includes 1.5 m neoprene cable
05RN-F 4x0.50 Ø5.8 mm

1 - 5 m
2 - 10 m
3 - 15 m
4 - 20 m

dynamic white: amber, 4000K, 5000K

5162 lm,
amber: 1288 lm 4000K: 1890 lm 5000K: 1984 lm
(4000K)

3687 lm,
amber: 920 lm 4000K: 1350 lm 5000K: 1417 lm
(4000K, 26°)

15 LED groups, pitch 120 mm
50000h L90 B10 (Ta 25°C)

body in anodized anticorrosional aluminium
screen in serigraphed and transparent,
tempered extra-clear glass

not included, see p. 904 and 917

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing


see p. 204 and 205

see p. 857



< **NEVA 7.2**
RGBW, 75W, 26°x58°

Project by / SC Servizi Integrati
Torre Bassano
Torre del Greco, Naples, Italy



NEVA MINI 7



NEVA 7.0






POWER / POWER SUPPLY CODE	15W 24Vdc 316 mm pitch 120 NV0700 7 ■ A
OPTICS	S - 18° M - 32° L - 44° K - 78° W - 26°x58°
LED COLOUR	RGBW

POWER / POWER SUPPLY CODE	30W 24Vdc 677 mm pitch 120 NV7000 7 ■ A
OPTICS	S - 18° M - 32° L - 44° K - 78° W - 26°x58°
LED COLOUR	RGBW

LUMEN OUTPUT AT SOURCE	850 lm, R: 137 lm G: 300 lm B: 92 lm W: 321 lm (4000K)
DELIVERED LUMEN OUTPUT	525 lm, R: 84 lm G: 186 lm B: 57 lm W: 198 lm (4000K, 32°)
NO. AND TYPE OF LED	3 RGBW LED groups, pitch 120 mm 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904 and 917
POWER CABLES	includes 1.5 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see p. 204 and 205
PHOTOMETRIC DATA	see p. 854

LUMEN OUTPUT AT SOURCE	1699 lm, R: 273 lm G: 600 lm B: 184 lm W: 642 lm (4000K)
DELIVERED LUMEN OUTPUT	1051 lm, R: 169 lm G: 371 lm B: 114 lm W: 397 lm (4000K, 32°)
NO. AND TYPE OF LED	6 RGBW LED groups, pitch 120 mm 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized anticorrosion aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904 and 917
POWER CABLES	includes 1.5 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm
MOUNTING	surface mounted (ceiling, wall, ground) with brackets recessed (ceiling, wall, ground) with outer casing
ACCESSORIES	see p. 204 and 205
PHOTOMETRIC DATA	see p. 857

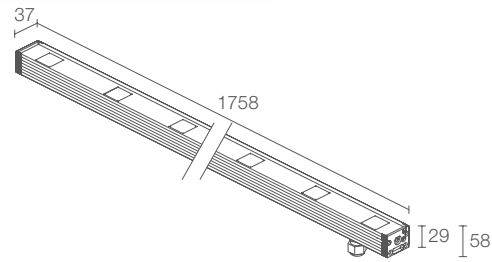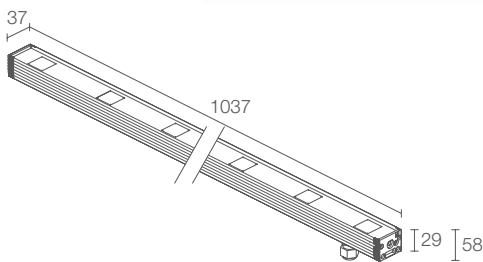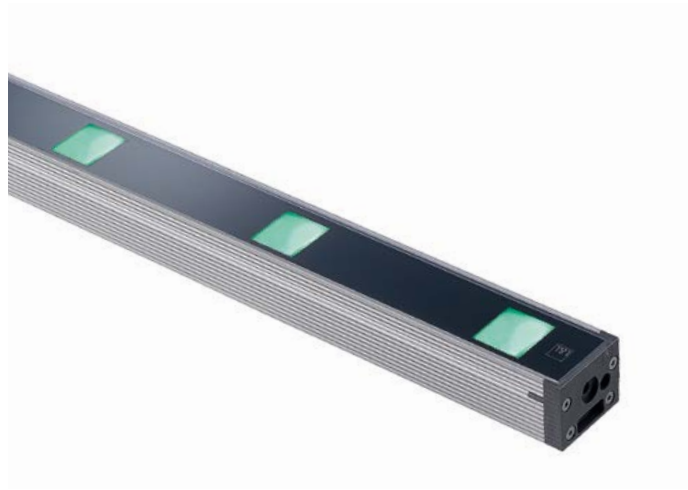

NEVA 7.1



kg 1.90 IP65 IP67 IK06

A A+ A++ **IP** **PID** NTC CASAMBI $T_{max} 60^{\circ}C$

45W 24Vdc 1037 mm pitch 120
NV7100 7 ■ A

S - 18°
M - 32°
L - 44°
K - 78°
W - 26°x58°

RGBW

2548 lm, R: 410 lm G: 900 lm B: 275 lm
W: 963 lm (4000K)

1575 lm, R: 253 lm G: 556 lm B: 171 lm
W: 595 lm (4000K, 32°)

9 RGBW LED groups, pitch 120 mm
50000h L90 B10 (Ta 25°C)

body in anodized anticorrosion aluminium
screen in serigraphed and transparent,
tempered extra-clear glass

not included, see p. 904 and 917

includes 1.5 m FEP+RUB cable
(equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

see p. 857

NEVA 7.2



kg 3.20 IP65 IP67 IK06

A A+ A++ **IP** **PID** NTC CASAMBI $T_{max} 60^{\circ}C$

75W 24Vdc 1758 mm pitch 120
NV7200 7 ■ A

S - 18°
M - 32°
L - 44°
K - 78°
W - 26°x58°

RGBW

4247 lm, R: 683 lm G: 1500 lm B: 459 lm
W: 1605 lm (4000K)

2625 lm, R: 422 lm G: 927 lm B: 284 lm
W: 992 lm (4000K, 32°)

15 RGBW LED groups, pitch 120 mm
50000h L90 B10 (Ta 25°C)

body in anodized anticorrosion aluminium
screen in serigraphed and transparent,
tempered extra-clear glass

not included, see p. 904 and 917

includes 1.5 m FEP+RUB cable
(equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm

surface mounted (ceiling, wall, ground) with brackets
recessed (ceiling, wall, ground) with outer casing

see p. 204 and 205

see p. 857

ANTI-GLARE ACCESSORIES



Honeycomb louvre built into the lighting fixture order together with the lighting fixture




Anti-glare shield in black-painted stainless steel

ACCESSORIES FOR INSTALLATION



Aluminium outer casing




Aluminium outer casing for plasterboard

NEVA MINI 1	WH6001	WB6500 - 328 mm	WC6500 - 322 mm	WC6700 - 322 mm
NEVA 1.0	WH6010	WB6510 - 612 mm	WC6510 - 622 mm	WC6710 - 622 mm
NEVA 1.1	WH6011	WB6511 - 912 mm	WC6511 - 922 mm	WC6711 - 922 mm
NEVA 1.2	WH6012	WB6512 - 1513 mm	WC6512 - 1522 mm	WC6712 - 1522 mm
NEVA MINI 2	WH6002	WB6500 - 328 mm	WC6500 - 322 mm	WC6700 - 322 mm
NEVA 2.0	WH6020	WB6520 - 673 mm	WC6520 - 682 mm	WC6720 - 682 mm
NEVA 2.1	WH6021	WB6521 - 1033 mm	WC6521 - 1042 mm	WC6721 - 1042 mm
NEVA 2.2	WH6022	WB6522 - 1754 mm	WC6522 - 1763 mm	WC6722 - 1763 mm
NEVA 3.0		WB6510 - 612 mm	WC6510 - 622 mm	WC6710 - 622 mm
NEVA 3.1		WB6511 - 912 mm	WC6511 - 922 mm	WC6711 - 922 mm
NEVA 3.2		WB6512 - 1513 mm	WC6512 - 1522 mm	WC6712 - 1522 mm
NEVA 4.0		WB6520 - 673 mm	WC6520 - 682 mm	WC6720 - 682 mm
NEVA 4.1		WB6521 - 1033 mm	WC6521 - 1042 mm	WC6721 - 1042 mm
NEVA 4.2		WB6522 - 1754 mm	WC6522 - 1763 mm	WC6722 - 1763 mm
NEVA MINI 5	WH6002	WB6500 - 328 mm	WC6500 - 322 mm	WC6700 - 322 mm
NEVA 5.0	WH6020	WB6520 - 673 mm	WC6520 - 682 mm	WC6720 - 682 mm
NEVA 5.1	WH6021	WB6521 - 1033 mm	WC6521 - 1042 mm	WC6721 - 1042 mm
NEVA 5.2	WH6022	WB6522 - 1754 mm	WC6522 - 1763 mm	WC6722 - 1763 mm
NEVA MINI 6	WH6002	WB6500 - 328 mm	WC6500 - 322 mm	WC6700 - 322 mm
NEVA 6.0	WH6020	WB6520 - 673 mm	WC6520 - 682 mm	WC6720 - 682 mm
NEVA 6.1	WH6021	WB6521 - 1033 mm	WC6521 - 1042 mm	WC6721 - 1042 mm
NEVA 6.2	WH6022	WB6522 - 1754 mm	WC6522 - 1763 mm	WC6722 - 1763 mm
NEVA MINI 7		WB6500 - 328 mm	WC6500 - 322 mm	WC6700 - 322 mm
NEVA 7.0		WB6520 - 673 mm	WC6520 - 682 mm	WC6720 - 682 mm
NEVA 7.1		WB6521 - 1033 mm	WC6521 - 1042 mm	WC6721 - 1042 mm
NEVA 7.2		WB6522 - 1754 mm	WC6522 - 1763 mm	WC6722 - 1763 mm

for spare parts, see p. 933

ACCESSORIES

ACCESSORIES FOR INSTALLATION



WMO601
Pair of brackets h 75 mm
(Neva 1 / 2 / 5 / 6 / 7)



WMO602
Pair of brackets h 140 mm
(Neva 1 / 2 / 5 / 6 / 7)



WMA01N
Pair of brackets h 75 mm
(Neva 3 / 4)



WMA02N
Pair of brackets h 140 mm
(Neva 3 / 4)



WN6001
Anti-fall kit



WN6005
Alignment kit
for outer casings



WFA00
2-pin male connector
for in/out connection
(on/off version) - IP68
(Neva 3 / 4)




WFA01
4-pin male connector
for in/out connection
(0/1-10V version) - IP68
(Neva 3.0 / 3.1 /
4.0 / 4.1 / 4.2)




OUTDOOR LINEAR PROFILES

NEVA MINI 1


S - 11°

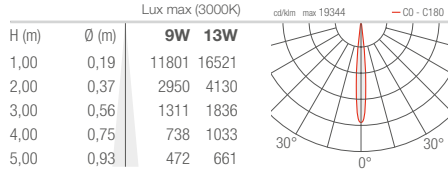


M - 30°

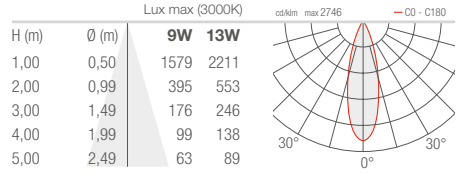

L - 45°

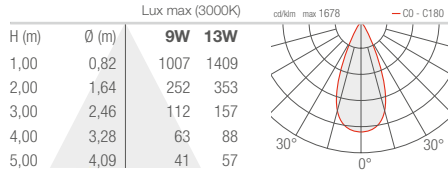


W - 10°x40°

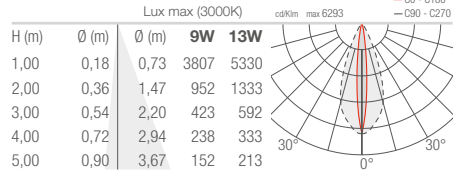


NEVA MINI 2


S - 11°

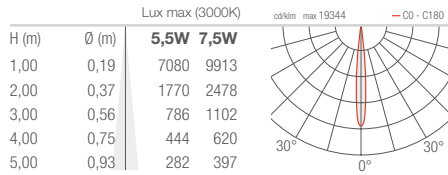


M - 30°

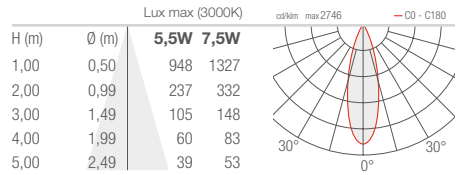

L - 45°

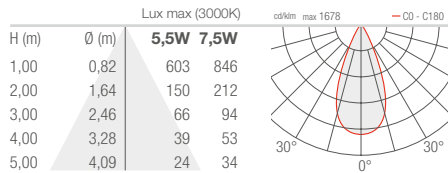


W - 10°x40°

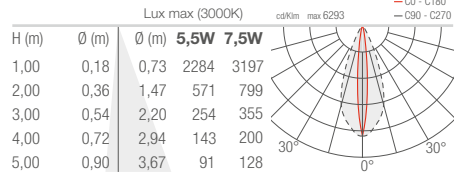


NEVA MINI 5


S - 15°

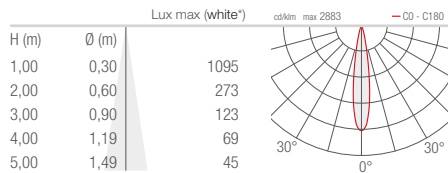


M - 26°

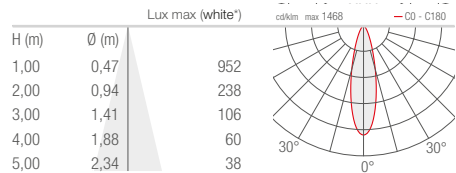

L - 30°

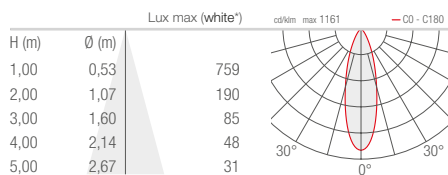


W - 24°x46°

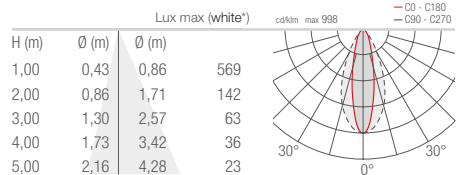


* White created by mixing the colours

NEVA MINI 6


S - 15°

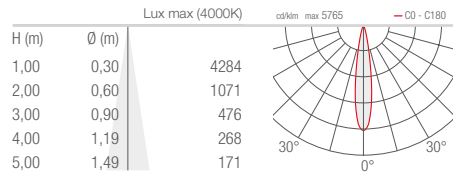


M - 26°

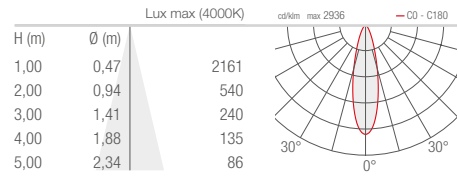

L - 30°

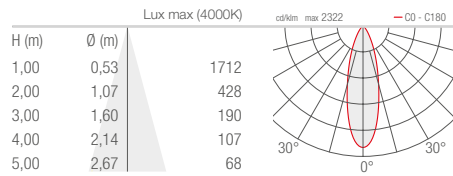


W - 24°x46°

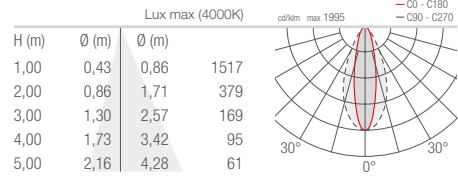


NEVA MINI 7


S - 18°

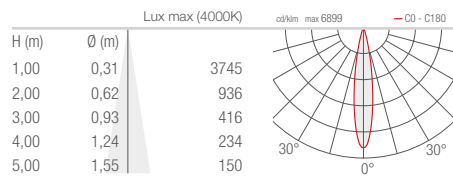


M - 32°

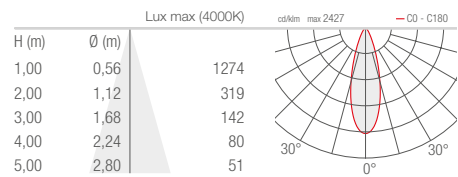


L - 44°

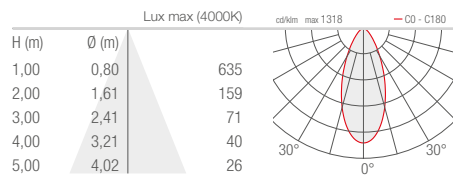

K - 78°

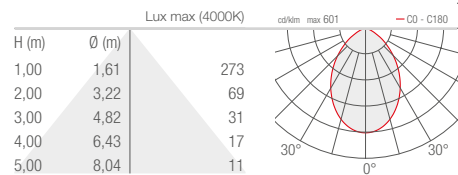


W - 26°x58°

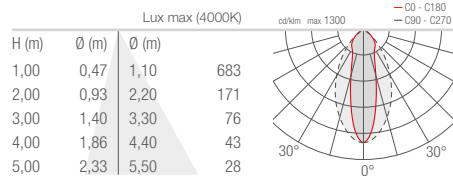


NEVA 1.0


S - 11°

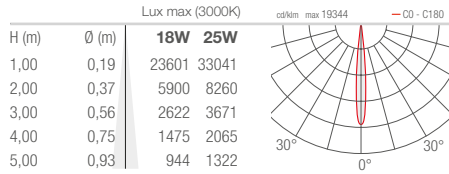


M - 30°

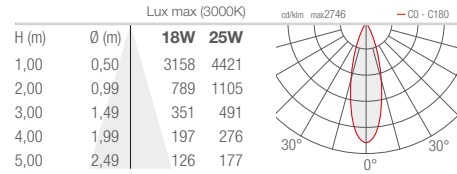

L - 45°

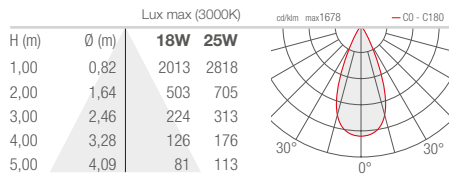


W - 10°x40°

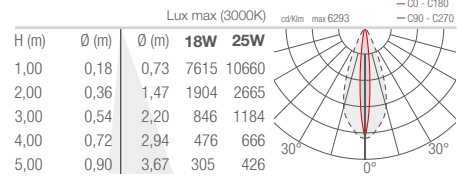


NEVA 2.0


S - 11°

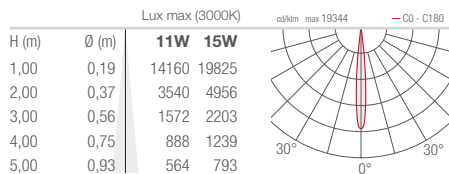


M - 30°

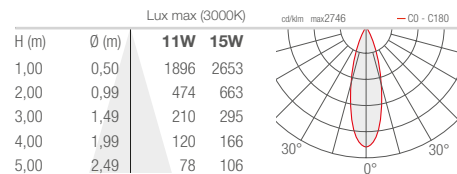

L - 45°

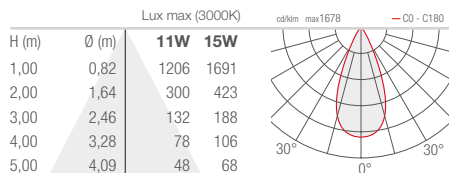


W - 10°x40°

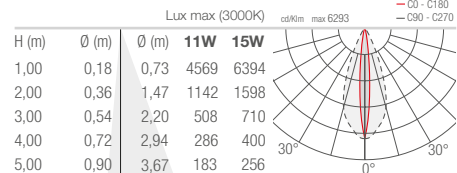


NEVA 3.0


S - 11°

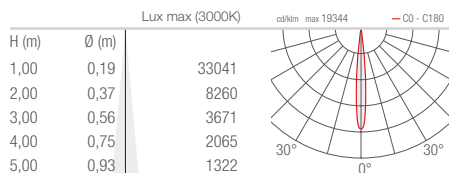


M - 30°

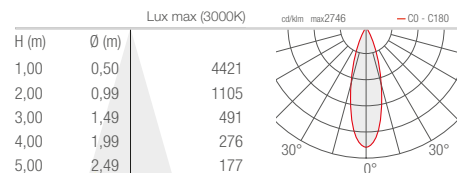

L - 45°

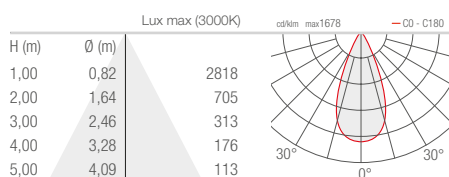


W - 10°x40°

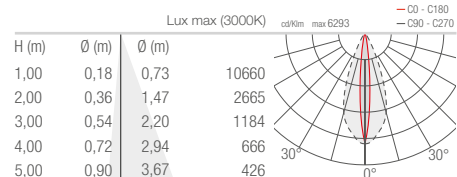


NEVA 4.0


S - 11°

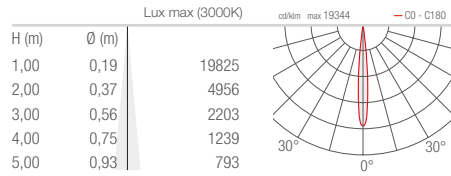


M - 30°

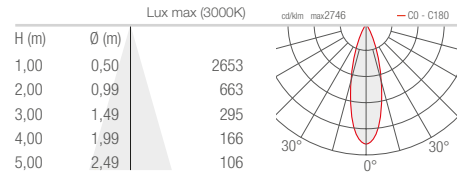

L - 45°

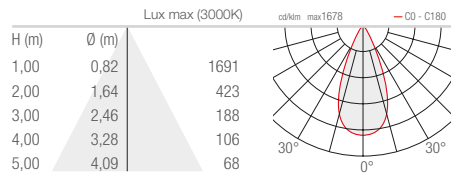


W - 10°x40°

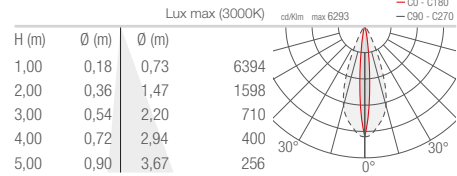


NEVA 5.0


S - 15°

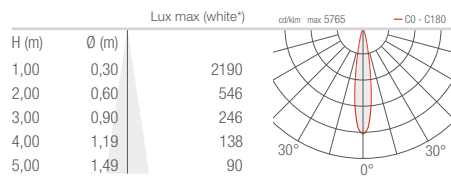


M - 26°

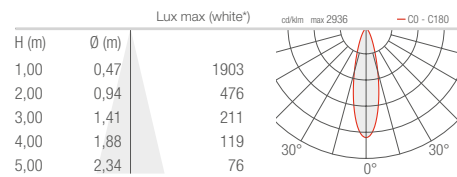

L - 30°

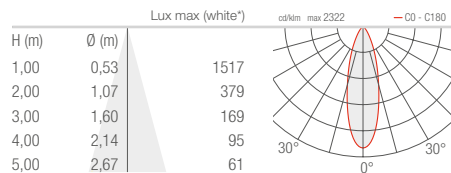


W - 24°x46°

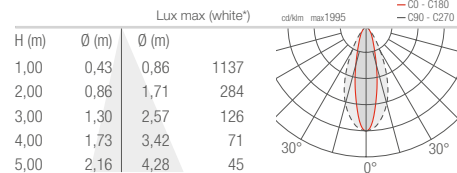


* White created by mixing the colours

NEVA 6.0


S - 15°

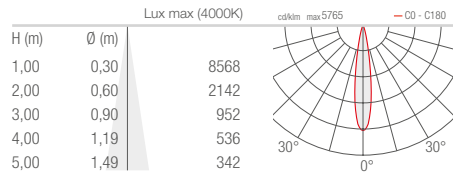


M - 26°

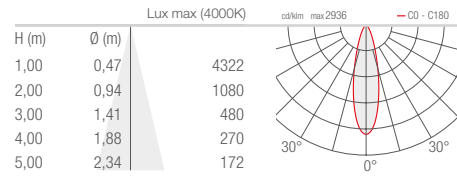

L - 30°

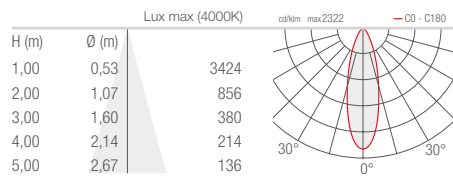


W - 24°x46°

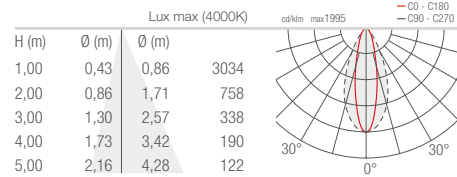


NEVA 7.0


S - 18°

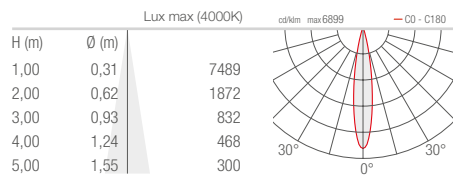


M - 32°

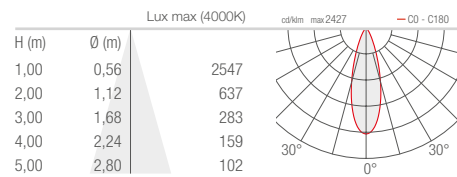

L - 44°

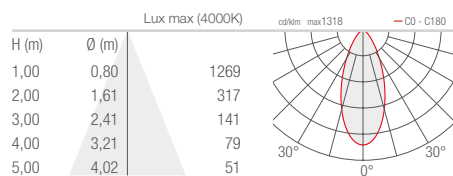

K - 78°

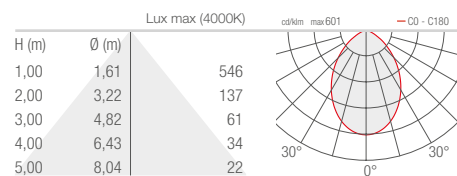

W - 26°x58°

