




INDOOR RECESSED DOWNLIGHTS FALSE CEILINGS IN RETAIL SPACES AND PRIVATE HOMES




SINGLE BEAM



DOUBLE BEAM



3 BEAMS




QUAD 6.1 p. 576
max 6W max 500mA



QUAD 6.2 p. 577
max 12W max 500mA



QUAD 6.3 p. 577
max 18W max 500mA

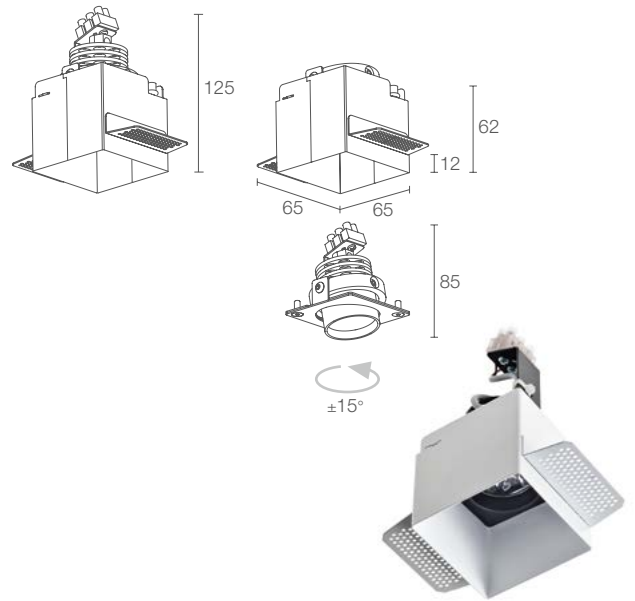


Required outer casing, not included

QUAD 6.1

165x165 mm
H 150 mm

65x65 mm



POWER / POWER SUPPLY CODE

max 6W max 500mA

QD6132 ■ **B** White

QD6132 ■ **N** Black

LED COLOUR

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue
6 - RGB

OPTICS

S - 12° tiltable ±15°
M - 24° tiltable ±15°
L - 56° tiltable ±15°

LUMEN OUTPUT AT SOURCE 436 lm (3000K, 500mA)
RGB: 294 lm, R: 108 lm G: 140 lm
B: 46 lm (500mA)

DELIVERED LUMEN OUTPUT 336 lm (3000K, 500mA, 24°)
RGB: 210 lm, R: 77 lm G: 100 lm
B: 33 lm (500mA, 24°)

NO. AND TYPE OF LED 3 power LEDs
1/4 ANSI BIN (white LED colour)
50000h L90 B10 (Ta 25°C)

MATERIAL body in anodized aluminium
trim in steel

POWER SUPPLY UNIT not included, see p. 904 and 917

POWER CABLES terminal block


WIRING series

MOUNTING recessed (ceiling)

ACCESSORIES see p. 579

NOTES Casambi-compatible version, controllable with the
Casambi app, available on request


PHOTOMETRIC DATA see p. 865

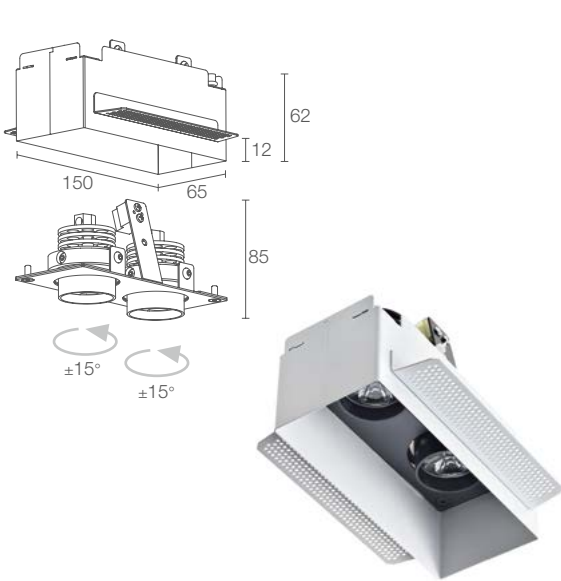

Required outer casing, not included

QUAD 6.2

165x250 mm
H 150 mm 65x150 mm



max 12W max 500mA

QD6262 ■ ■ **B** White
QD6262 ■ ■ **N** Black

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue
6 - RGB

S - 12° tiltable ±15°
M - 24° tiltable ±15°
L - 56° tiltable ±15°

872 lm (3000K, 500mA)
RGB: 588 lm, R: 216 lm G: 280 lm
B: 92 lm (500mA)

672 lm (3000K, 500mA, 24°)
RGB: 420 lm, R: 154 lm G: 200 lm
B: 66 lm (500mA, 24°)

6 power LEDs
1/4 ANSI BIN (white LED colour)
50000h L90 B10 (Ta 25°C)

body in anodized aluminium
trim in steel

not included, see p. 904 and 917

terminal block


series

recessed (ceiling)

see p. 579

Casambi-compatible version, controllable with the
Casambi app, available on request

see p. 865

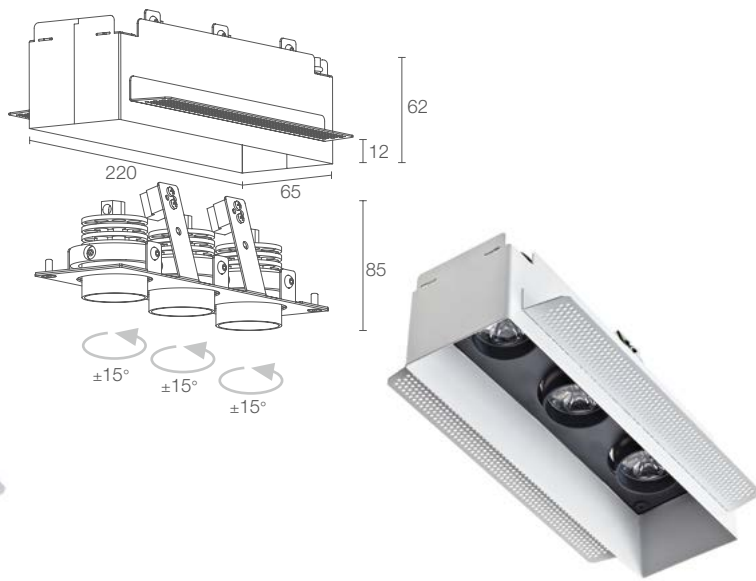

Required outer casing, not included

QUAD 6.3

165x325 mm
H 150 mm 65x220 mm



max 18W max 500mA

QD6392 ■ ■ **B** White
QD6392 ■ ■ **N** Black

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue
6 - RGB

S - 12° tiltable ±15°
M - 24° tiltable ±15°
L - 56° tiltable ±15°

1308 lm (3000K, 500mA)
RGB: 882 lm, R: 324 lm G: 420 lm
B: 138 lm (500mA)

1008 lm (3000K, 500mA, 24°)
RGB: 630 lm, R: 231 lm G: 300 lm
B: 99 lm (500mA, 24°)

9 power LEDs
1/4 ANSI BIN (white LED colour)
50000h L90 B10 (Ta 25°C)

body in anodized aluminium
trim in steel

not included, see p. 904 and 917

terminal block

series

recessed (ceiling)

see p. 579

Casambi-compatible version, controllable with the
Casambi app, available on request

see p. 865



White




Black




ACCESSORIES


ACCESSORIES FOR INSTALLATION



WC2001
Outer casing for plasterboard
(Quad 6.1)



WC2002
Outer casing for plasterboard
(Quad 6.2)

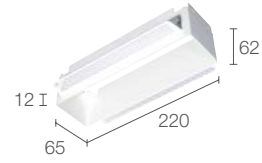


WC2003
Outer casing for plasterboard
(Quad 6.3)




OUTDOOR RECESSED

QUAD 6.1

S - 12°

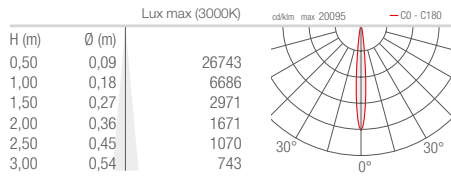

M - 24°

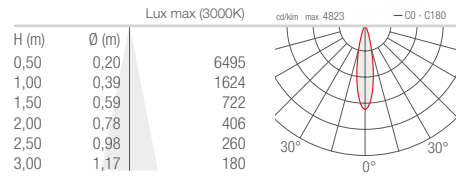

L - 56°

