

 **Ginko 1.0, code: GN100109S5-2**
Projectors for outdoor applications

                               <img alt="IEC 62778:2014 logo" data-b

ELECTRICAL CHARACTERISTICS

Power consumption	3,5W
Power supply	24Vdc
Power supply unit	power supply unit not included

LIGHTING CHARACTERISTICS

Number and type of LED	1 power LED
Average LED life	50 000h L90 B10 (Ta 25°C)
LED colour	4000K
CRI Colour Rendering Index	80
Binning	1/4 ANSI BIN
Optics	19°
Lumen output at source	224 lm (3000K, 3.5W, CRI 80)
Delivered lumen output	193 lm (3000K, 3.5W, 19°, CRI 80)

MECHANICAL CHARACTERISTICS


Dimensions	Ø34x49 mm
Weight	220 g, stainless steel: 335 g, brass: 360 g
Finishes	jasper green
Mounting	with bracket, screws and plugs
Body material	body in anticorodal aluminium, AISI 316L stainless steel bracket
Screen material	screen in serigraphed-grey and transparent, tempered extra-clear glass

GENERAL CHARACTERISTICS

Ingress protection	IP66, IP69
Operating temperature	-20°C — +45°C
Impact resistance	IK07
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Glow wire test	960°C
Appliance class	class III
Walkover	no
Drive-over	no
Power cables	includes 10 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm
Protection systems	IPS (Intelligent Protection System); PID (Protective Impedance Device)
Photobiological safety	in accordance with IEC TR 62778:2014
Notes	Casambi control using the Casambi app with dedicated electronics


PHOTOMETRIC DATA

S - 19° CRI 80

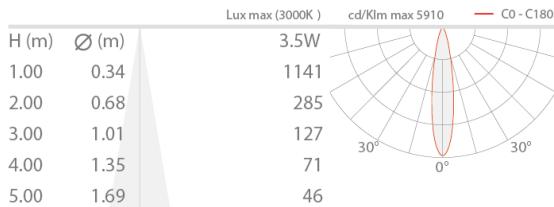

ACCESSORIES

Installation Accessories



WP0100

Spike for in-ground installation

Anti-glare



WB80115

Standard snoot - jasper green



WB8011N

Standard snoot - black anodized




WB80215

Asymmetrical snoot - jasper green



WB8021N

Asymmetrical snoot - black anodized



WH8001

Honeycomb louvre

built into the lighting fixture

The honeycomb louvre can be fitted on all optics, except for sharp optics
Order together with the lighting fixture

Other



WF3302

Flexible cable-protection tube - 18 cm
Order together with the lighting fixture

WP1004

Fastener strap - 5 m

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.