



Made in Italy

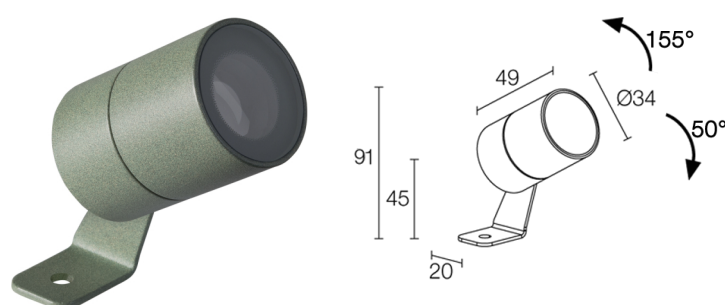

Ginko 1.0, code: GN100109S5-2

Projectors for outdoor applications



DESCRIPTION

projector for outdoor applications; surface mounted (ceiling, wall, ground, spike); Power consumption: 3,5W; Power supply: 24Vdc; Lumen output at source: 224 lm (3000K, 3.5W, CRI 80); Delivered lumen output: 193 lm (3000K, 3.5W, 19°, CRI 80); 1 power LED, 1/4 ANSI BIN, 50 000h L90 B10 (Ta 25°C); LED colour: 4000K; Optics: 19°: optical system consisting of a high-efficiency TIR lens combined with a high-quality technical filter; CRI Colour Rendering Index: 80; Body material: body made of ANTICORODAL 6082 low-copper-content aluminium alloy for excellent resistance to corrosion, made entirely on a CNC lathe. Bracket in AISI 316L stainless steel, tumble finished and painted; Finishes: jasper green finish obtained through an initial treatment with a ceramic nanoparticle coating, to prepare for painting, followed by a coat of epoxy paint and one of polyester paint to provide corrosion resistance of more than 1500 hours of salt spray. Paints compliant with the Qualicoat standard used in the automotive sector; RAL finish on request; Screen material: 4-mm-thick transparent extra-clear glass, with high transmittance to ensure chromatic uniformity of light and tempered for excellent resistance to knocks and scratches, with RAL 7015 grey vitrified serigraphy around the edge; power supply unit not included; includes 10 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm; Ingress protection: IP66, IP69; Impact resistance: IK07; Casambi control using the Casambi app with dedicated electronics; Protection systems: IPS (Intelligent Protection System) protects lighting fixtures from water infiltrations, which can occur if there are faulty junctions between the cables in outdoor or underwater applications. This innovation, patented by L&L, also guarantees electrical protection against polarity reversal, hot plugging, ESD and power surges, which can occur if there are faults in the electrical circuit; The PID (Protective Impedance Device) protects lighting fixtures from electrical phenomena external to the system, such as static electricity accumulation or electromagnetic interference coming from the mains power. Generally, these are events with a low energy content; Operating temperature: -20°C — +45°C; Glow wire test: 960°C; Photobiological safety: in accordance with IEC TR 62778:2014; Appliance class: class III; Weight: 220 g, stainless steel: 335 g, brass: 360 g; Dimensions: Ø34x49 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WB80115 Standard snoot - jasper green, WB8011N Standard snoot - black anodized, WB80215 Asymmetrical snoot - jasper green, WB8021N Asymmetrical snoot - black anodized, WF3302 Flexible cable-protection tube - 18 cm, WH8001 Honeycomb louvre, WP0100 Spike for in-ground installation, WP1004 Fastener strap - 5 m; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

ELECTRICAL CHARACTERISTICS

| | |
|-------------------|--------------------------------|
| Power consumption | 3,5W |
| Power supply | 24Vdc |
| Power supply unit | power supply unit not included |

LIGHTING CHARACTERISTICS

| | |
|----------------------------|-----------------------------------|
| Number and type of LED | 1 power LED |
| Average LED life | 50 000h L90 B10 (Ta 25°C) |
| LED colour | 4000K |
| CRI Colour Rendering Index | 80 |
| Binning | 1/4 ANSI BIN |
| Optics | 19° |
| Lumen output at source | 224 lm (3000K, 3.5W, CRI 80) |
| Delivered lumen output | 193 lm (3000K, 3.5W, 19°, CRI 80) |

MECHANICAL CHARACTERISTICS


| | |
|-----------------|--|
| Dimensions | Ø34x49 mm |
| Weight | 220 g, stainless steel: 335 g, brass: 360 g |
| Finishes | jasper green |
| Mounting | with bracket, screws and plugs |
| Body material | body in anticorodal aluminium, AISI 316L stainless steel bracket |
| Screen material | screen in serigraphed-grey and transparent, tempered extra-clear glass |

GENERAL CHARACTERISTICS

| | |
|-------------------------|--|
| Ingress protection | IP66, IP69 |
| Operating temperature | -20°C — +45°C |
| Impact resistance | IK07 |
| Energy efficiency class | F (light source) in accordance with EU 2019/2015 |
| Glow wire test | 960°C |
| Appliance class | class III |
| Walkover | no |
| Drive-over | no |
| Power cables | includes 10 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm |
| Protection systems | IPS (Intelligent Protection System); PID (Protective Impedance Device) |
| Photobiological safety | in accordance with IEC TR 62778:2014 |
| Notes | Casambi control using the Casambi app with dedicated electronics |

PHOTOMETRIC DATA

S - 19° CRI 80

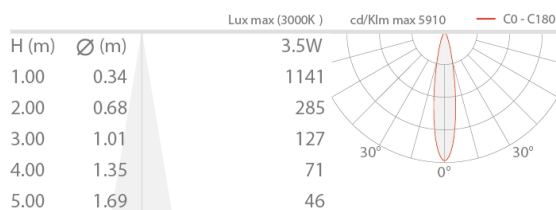

ACCESSORIES


Installation Accessories



WP0100

Spike for in-ground installation

Anti-glare




WB80115

Standard snoot - jasper green



WB8011N

Standard snoot - black anodized




WB80215

Asymmetrical snoot - jasper green



WB8021N

Asymmetrical snoot - black anodized



WH8001

Honeycomb louvre
built into the lighting fixture

The honeycomb louvre can be fitted on all optics, except for sharp optics
Order together with the lighting fixture

Other



WF3302

Flexible cable-protection tube - 18 cm
Order together with the lighting fixture



WP1004

Fastener strap - 5 m

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.