


Made in Italy

 **Litus 5.4, code: LT54001FSNV**  
Recessed for outdoor applications

03/02/2026 Rev. 10/2024

       kg 1000 - kN 10  kg 0,60  IP67  IK08  





## DESCRIPTION

recessed for outdoor applications; drive-over up to 1000 kg; walkover; recessed (ceiling, wall, floor); Power consumption: 10W; Power supply: 24Vdc; Lumen output at source: 900 lm (3000K, 10W, CRI >90); Delivered lumen output: 645 lm (3000K, 38°, 10W, CRI >90); 1 high power density COB LED, 2-step MacAdam, 50 000h L95 B10 (Ta 25°C); LED colour: 2700K; Optics: 16°: optical system consisting of a high-efficiency TIR lens combined with a high-quality technical filter; CRI Colour Rendering Index: >90; Body material: body made of ANTICORODAL 6082 aluminium alloy, made entirely on a CNC lathe and then electro-coloured black; Screen material: 6-mm-thick transparent extra-clear glass, high transmittance to ensure chromatic uniformity of light and tempered for excellent resistance to knocks and scratches, with a RAL 7015 signal grey serigraphed border; power supply unit not included; includes 1.5 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm; Ingress protection: IP67; Impact resistance: IK08; 16°x69° optics adjustable through 360° using the magnet provided (patented); version with screen in serigraphed-white glass available on request, version with 8° optics and 10W power available on request; Casambi control using the Casambi app with dedicated electronics; Protection systems: IPS (Intelligent Protection System) protects lighting fixtures from water infiltrations, which can occur if there are faulty junctions between the cables in outdoor or underwater applications. This innovation, patented by L&L, also guarantees electrical protection against polarity reversal, hot plugging, ESD and power surges, which can occur if there are faults in the electrical circuit; Operating temperature: -20°C — +45°C; Maximum device temperature: 40°C (Ta 25°C); Glow wire test: 960°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class III; Weight: 600 g; Dimensions: Ø96x70 mm; Volume of thermal heatsink: Ø180x180 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WC4050 Outer casing, WE0604S Anti-glare screen, half transparent and half serigraphed black, WH0204 Honeycomb louvre, WL0500 Suction cup; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

## ELECTRICAL CHARACTERISTICS

Power consumption	10W
Power supply	24Vdc
Power supply unit	power supply unit not included

## LIGHTING CHARACTERISTICS

Number and type of LED	1 high power density COB LED
Average LED life	50 000h L95 B10 (Ta 25°C)
LED colour	2700K
CRI Colour Rendering Index	>90
Binning	2-step MacAdam
Optics	16°
Lumen output at source	900 lm (3000K, 10W, CRI >90)
Delivered lumen output	645 lm (3000K, 38°, 10W, CRI >90)

## MECHANICAL CHARACTERISTICS


Dimensions	Ø96x70 mm
Weight	600 g
Mounting	with outer casing
Body material	body in black-anodized anticorodal aluminium
Screen material	screen in serigraphed-grey and transparent, tempered extra-clear glass
Volume of thermal heatsink	Ø180x180 mm

## GENERAL CHARACTERISTICS

Ingress protection	IP67
Operating temperature	-20°C — +45°C
Impact resistance	IK08
Features	16°x69° optics adjustable through 360° using the magnet provided (patented)
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Glow wire test	960°C
Maximum device temperature	40°C (Ta 25°C)
Appliance class	class III
Walkover	yes
Drive-over	up to 1000 kg
Power cables	includes 1.5 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm
Protection systems	IPS (Intelligent Protection System)
Photobiological safety	photobiological safety: risk group 1 according to EN 62471:2006
Notes	version with screen in serigraphed-white glass available on request, version with 8° optics and 10W power available on request; Casambi control using the Casambi app with dedicated electronics

## PHOTOMETRIC DATA

S - 16° CRI 80

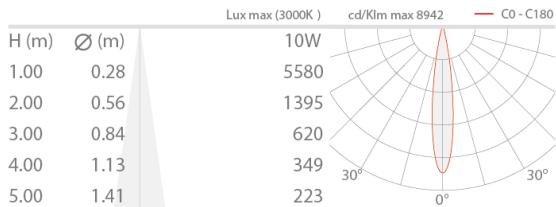


## ACCESSORIES

### Installation Accessories




WC4050  
Outer casing

### Anti-glare



WH0204  
Honeycomb louvre  
built into the lighting fixture  
The honeycomb louvre can be fitted on all optics except for sharp, diffuse and 16°x69° adjustable optics  
Order together with the lighting fixture

### Optical Accessories



WE0604S  
Anti-glare screen, half transparent and half serigraphed black  
built into the lighting fixture  
Order together with the lighting fixture

### Other

**WL0500**

Suction cup

Recommended accessory



Installation flush with ground

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.