


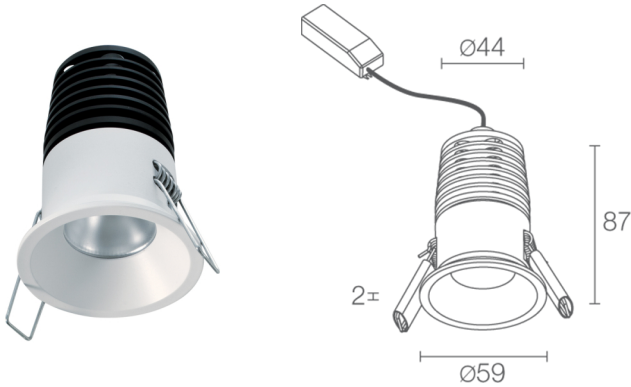
Made in Italy

 **Esem 3.0, code: ES30105MBD**  
Recessed for indoor applications

14/05/2026 Rev. 13/2024




 on request
 
 kg 0,25
  Ø50 mm
 **IP40**
 DALI
 PUSH
 



## DESCRIPTION

recessed downlight for indoor applications; recessed (ceiling); Power consumption: 8W; Power supply: 230Vac; Lumen output at source: 512 lm (3000K); Delivered lumen output: 425 lm (3000K, 30°); 1 multichip power LED, 2-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 3000K; Optics: 30°; CRI Colour Rendering Index: 80; Body material: body and trim in aluminium; Finishes: white (RAL 9003); RAL finish on request; Thickness of installation surface: min 5 mm, max 25 mm; power supply unit included; includes 0.30 m cable; Control system: PUSH, DALI; Ingress protection: IP40; Operating temperature: 0°C – +45°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class I; Weight: 250 g; Dimensions: Ø59x87 mm; Cutout dimensions: Ø50 mm; Volume of thermal heatsink: Ø170x150 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

### ELECTRICAL CHARACTERISTICS

Power consumption	8W
Power supply	230Vac
Power supply unit	power supply unit included
Control system	PUSH, DALI

### LIGHTING CHARACTERISTICS

Number and type of LED	1 multichip power LED
Average LED life	50 000h L90 B10 (Ta 25°C)
LED colour	3000K
CRI Colour Rendering Index	80
Binning	2-step MacAdam
Optics	30°
Lumen output at source	512 lm (3000K)
Delivered lumen output	425 lm (3000K, 30°)

### MECHANICAL CHARACTERISTICS


Dimensions	Ø59x87 mm
Weight	250 g
Finishes	white RAL 9003
Mounting	with fixing springs
Body material	body and trim in aluminium
Cutout dimensions	Ø50 mm
Volume of thermal heatsink	Ø170x150 mm

### GENERAL CHARACTERISTICS

Ingress protection	IP40
Operating temperature	0°C — +45°C
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Appliance class	class I
Walkover	no
Drive-over	no
Power cables	includes 0.30 m cable
Photobiological safety	photobiological safety: risk group 1 according to EN 62471:2006

PHOTOMETRIC DATA

M - 30°

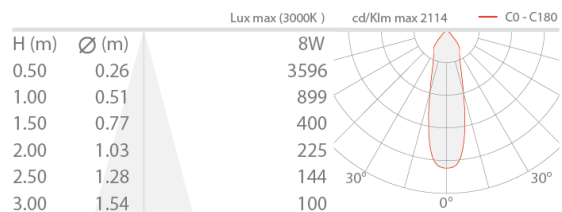

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.