




Made in Italy



Spot 3.4, code: CF3410000090S5

Projectors for outdoor applications

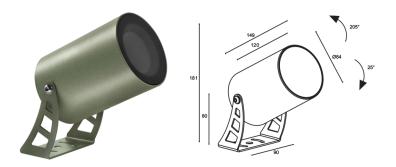

DESCRIPTION

projector for outdoor applications; surface mounted (ceiling, wall, ground, spike, strap); Power consumption: 15W; Power supply: 230Vac; Lumen output at source: 1476 lm (3000K); Delivered lumen output: 1042 lm (3000K, 39°); 1 COB LED, 3-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 4000K; Optics: 15°; CRI Colour Rendering Index: 80; Body material: body made of ANTICORODAL 6026 low-copper-content aluminium alloy for excellent resistance to corrosion, made on a CNC lathe. Bracket made of tumble-finished, painted aluminium 5754; Finishes: jasper green finish obtained through an initial treatment with a ceramic nanoparticle coating, to prepare for painting, followed by a coat of epoxy paint and one of polyester paint to provide corrosion resistance of more than 1000 hours of salt spray; RAL finish on request; Screen material: 5-mm-thick tempered, transparent extra-clear glass, with vitrified serigraphy, to ensure chromatic uniformity of light and excellent resistance to knocks and scratches; builtin power supply unit; includes 1.50 m neoprene cable H05RN-F 3x1,0 Ø7 mm; Ingress protection: IP66; Impact resistance: IK09; Protection systems: IPS (Intelligent Protection System) protects lighting fixtures from water infiltrations, which can occur if there are faulty junctions between the cables in outdoor or underwater applications. This innovation, patented by L&L, also guarantees electrical protection against polarity reversal, hot plugging, ESD and power surges, which can occur if there are faults in the electrical circuit; Operating temperature: -20°C - +45°C; Glow wire test: 960°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class I; Weight: 1200 g; Dimensions: Ø84x149 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WB80105 Standard snoot - jasper green, WB80205 Asymmetrical snoot - jasper green, WP0100 Spike for in-ground installation, WP1004 Fastener strap - 5 m, WP10065 Spike for in-ground installation - h 500 mm - jasper green, WP10075 Spike for in-ground installation - h 800 mm - jasper green; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

DATASHEET TECHNICAL DATA



15W
230Vac
built-in power supply unit
1 COB LED
50 000h L90 B10 (Ta 25°C)
4000K
80
3-step MacAdam
15°
1476 lm (3000K)
1042 lm (3000K, 39°)
Ø84x149 mm
1200 g
jasper green
with bracket, screws and plugs
body in anticorodal aluminium, bracket in aluminium
· •
body in anticorodal aluminium, bracket in aluminium
body in anticorodal aluminium, bracket in aluminium
body in anticorodal aluminium, bracket in aluminium screen in serigraphed, transparent, tempered extra-clear glass
body in anticorodal aluminium, bracket in aluminium screen in serigraphed, transparent, tempered extra-clear glass IP66
body in anticorodal aluminium, bracket in aluminium screen in serigraphed, transparent, tempered extra-clear glass IP66 -20°C - +45°C
body in anticorodal aluminium, bracket in aluminium screen in serigraphed, transparent, tempered extra-clear glass IP66 -20°C - +45°C IK09
body in anticorodal aluminium, bracket in aluminium screen in serigraphed, transparent, tempered extra-clear glass IP66 -20°C — +45°C IK09 F (light source) in accordance with EU 2019/2015
body in anticorodal aluminium, bracket in aluminium screen in serigraphed, transparent, tempered extra-clear glass IP66 -20°C - +45°C IK09 F (light source) in accordance with EU 2019/2015 960°C
body in anticorodal aluminium, bracket in aluminium screen in serigraphed, transparent, tempered extra-clear glass IP66 -20°C — +45°C IK09 F (light source) in accordance with EU 2019/2015 960°C class I
body in anticorodal aluminium, bracket in aluminium screen in serigraphed, transparent, tempered extra-clear glass IP66 -20°C — +45°C IK09 F (light source) in accordance with EU 2019/2015 960°C class I no
body in anticorodal aluminium, bracket in aluminium screen in serigraphed, transparent, tempered extra-clear glass IP66 -20°C - +45°C IK09 F (light source) in accordance with EU 2019/2015 960°C class I no no

PHOTOMETRIC DATA AND ACCESSORIES



PHOTOMETRIC DATA

S - 15°


		Lux max (3000K) cd/Klm max 9791 — C0 - C180
H (m)	Ø (m)	15W
1.00	0.26	7597
2.00	0.53	1899
3.00	0.79	844 30° 30°
4.00	1.05	475 0°
5.00	1.32	304

ACCESSORIES

Installation Accessories







Spike for in-ground installation - h 500 mm - jasper green

WP0100

Spike for in-ground installation





WP10075

Spike for in-ground installation - h 800 mm - jasper green

Anti-glare





WP10065

WB80105

Standard snoot - jasper green



WB80205

Asymmetrical snoot - jasper green

Other



WP1004

DATASHEET PHOTOMETRIC DATA AND ACCESSORIES

SPOT 3.4, CODE: CF3410000090S5



Fastener	strap	- 5	m
rastellel	อแลม	- 5	11

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.