
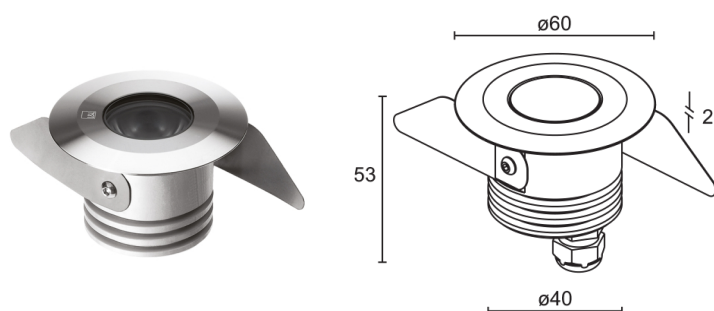


Made in Italy

 Beam 1.0, code: CD10116MAI  
Recessed for outdoor applications

02/05/2024 Rev. 39



## DESCRIPTION

recessed for outdoor applications; walkover; recessed (ceiling, wall, floor); Power consumption: max 3W; Power supply: max 350mA; Lumen output at source: 217 lm, R: 80 lm G: 104 lm B: 33 lm (350mA); Delivered lumen output: 154 lm R: 57 lm G: 74 lm B: 23 lm (350mA, 19°); 1 full-colour LED, 50 000h L80 B10 (Ta 25°C); LED colour: RGB; Optics: 30°; Body material: body in anodized aluminium, trim in AISI 316L stainless steel; Finishes: stainless steel; RAL finish on request; Screen material: screen in transparent extra-clear glass; Thickness of installation surface: min 5 mm, max 30 mm; power supply unit not included; Wiring: series; includes 1.50 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm; Control system: dimming via dimmable driver; Ingress protection: IP65, IP67; Impact resistance: IK08; version with 24Vdc power supply available on request; Casambi control using the Casambi app with dedicated electronics; Protection systems: IPS (Intelligent Protection System) protects lighting fixtures from water infiltrations, which can occur if there are faulty junctions between the cables in outdoor or underwater applications. This innovation, patented by L&L, also guarantees electrical protection against polarity reversal, hot plugging, ESD and power surges, which can occur if there are faults in the electrical circuit; Operating temperature: -20°C — +45°C; Maximum device temperature: 50°C (Ta 25°C); Glow wire test: 960°; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class III; Weight: 280 g; Dimensions: Ø60x53 mm; Cutout dimensions: Ø45 mm; Volume of thermal heatsink: Ø80x100 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WC1501 Outer casing; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

## ELECTRICAL CHARACTERISTICS

Power consumption	max 3W
Power supply	max 350mA
Power supply unit	power supply unit not included
Control system	dimming via dimmable driver
Wiring	series

## LIGHTING CHARACTERISTICS

Number and type of LED	1 full-colour LED
Average LED life	50 000h L80 B10 (Ta 25°C)
LED colour	RGB
Optics	30°
Lumen output at source	217 lm, R: 80 lm G: 104 lm B: 33 lm (350mA)
Delivered lumen output	154 lm R: 57 lm G: 74 lm B: 23 lm (350mA, 19°)

## MECHANICAL CHARACTERISTICS


Dimensions	Ø60x53 mm
Weight	280 g
Finishes	stainless steel
Mounting	with fixing springs or outer casing
Body material	body in anodized aluminium, trim in AISI 316L stainless steel
Screen material	screen in transparent extra-clear glass
Cutout dimensions	Ø45 mm
Volume of thermal heatsink	Ø80x100 mm

## GENERAL CHARACTERISTICS

Ingress protection	IP65, IP67
Operating temperature	-20°C — +45°C
Impact resistance	IK08
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Glow wire test	960°
Maximum device temperature	50°C (Ta 25°C)
Appliance class	class III
Walkover	yes
Drive-over	no
Power cables	includes 1.50 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm
Protection systems	IPS (Intelligent Protection System)
Photobiological safety	photobiological safety: risk group 1 according to EN 62471:2006
Notes	version with 24Vdc power supply available on request; Casambi control using the Casambi app with dedicated electronics

PHOTOMETRIC DATA

M - 30°

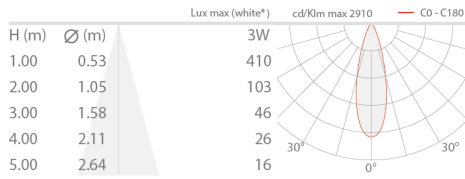

ACCESSORIES

Installation Accessories



WC1501  
Outer casing

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.