Made in Italy

23/11/2026 Rev. 01/2022

# Stinger 2.0, code: BASGR20101050LB

Projectors for indoor applications

kg 0,85 IP20



## DESCRIPTION


projector for indoor applications; on track; Power consumption: 20W; Power supply: 230Vac; Lumen output at source: 2600 lm (3000K); Delivered lumen output: 1701 lm (3000K, 38°); 1 COB LED, 3-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 3000K; Optics: 38°; CRI Colour Rendering Index: >90; Body material: body in anodized aluminium; Finishes: white (RAL 9003); Screen material: glass screen; built-in power supply unit; Ingress protection: IP20; DALI version available on request; version with CRI >97 available on request; version with LED colour 2700K available on request; Operating temperature: 35°C; Glow wire test: 650°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Weight: 850 g; Dimensions: Ø90x165mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WBA05N Asymmetrical snoot - black, WBA06N Barn doors - black, WBA07N Standard snoot - black, WHA01 Honeycomb louvre , WRA01 Optics - 15°, WRA04 Optics - 24°, WRA07 Optics - 38°, WRA09 Optics - 60°; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Product being discontinued

| | |
|---|---|
| **ELECTRICAL CHARACTERISTICS** | |
| Power consumption | 20W |
| Power supply | 230Vac |
| Power supply unit | built-in power supply unit |
| **LIGHTING CHARACTERISTICS** | |
| Number and type of LED | 1 COB LED |
| Average LED life | 50 000h L90 B10 (Ta 25°C) |
| LED colour | 3000K |
| CRI Colour Rendering Index | >90 |
| Binning | 3-step MacAdam |
| Optics | 38° |
| Lumen output at source | 2600 lm (3000K) |
| Delivered lumen output | 1701 lm (3000K, 38°) |
| **MECHANICAL CHARACTERISTICS** | |
| Dimensions | Ø90x165mm |
| Weight | 850 g |
| Finishes | white RAL 9003 |
| Body material | body in anodized aluminium |
| Screen material | glass screen |
| **GENERAL CHARACTERISTICS** | |
| Ingress protection | IP20 |
| Operating temperature | 35°C |
| Energy efficiency class | F (light source) in accordance with EU 2019/2015 |
| Glow wire test | 650°C |
| Walkover | no |
| Drive-over | no |
| Photobiological safety | photobiological safety: risk group 1 according to EN 62471:2006 |
| Notes | DALI version available on request; version with CRI >97 available on request; version with LED colour 2700K available on request |

## PHOTOMETRIC DATA

L – 38°

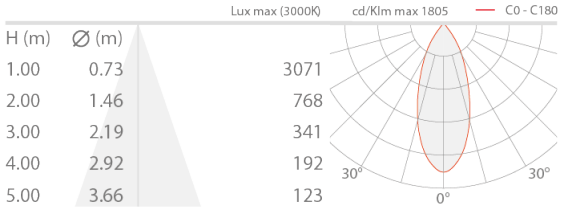


## ACCESSORIES

### Anti-glare




WBA05N
Asymmetrical snoot - black



WBA06N
Barn doors - black



WBA07N
Standard snoot - black



WHA01
Honeycomb louvre

### Other



WRA01
Optics - 15°



WRA04
Optics - 24°



WRA07
Optics - 38°



WRA09
Optics - 60°

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.