Made in Italy


07/11/2026 Rev. 08/2024

Gem 1.1, code: GE1120100050FB

Projectors for indoor applications

kg 0,04 IP40



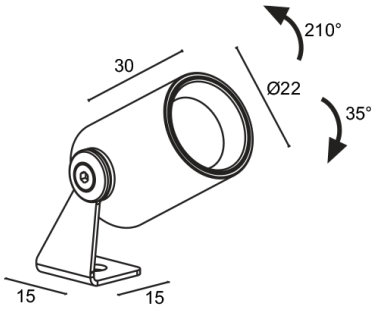

DESCRIPTION


projector for indoor applications; surface mounted (ceiling, wall, shelf, shop window); Power consumption: max 2,5W; Power supply: max 700mA; Lumen output at source: 260 lm (3000K, 700mA); Delivered lumen output: 160 lm (3000K, 700mA, 23°); 1 power LED, 2-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 3000K; Optics: 32°: optical system consisting of a high-efficiency TIR lens combined with a high-quality technical filter; CRI Colour Rendering Index: >90; Body material: body made of ANTICORODAL 6026 low-copper-content aluminium alloy for excellent resistance to corrosion, made entirely on a CNC lathe. Bracket made of tumble-finished, painted aluminium 5754; Finishes: body and bracket painted white (RAL 9003); RAL finish on request; power supply unit not included; Wiring: series; includes 1.50 m PVC cable HT105° 2x0,20 Ø3,0 mm; Control system: dimming via dimmable driver; Ingress protection: IP40; Operating temperature: 0°C — +45°C; Photobiological safety: in accordance with IEC TR 62778:2014; Appliance class: class III; Weight: 39 g; Dimensions: Ø22x30 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WF0600 PVC cable HT105° 2x0,20 Ø3,0 mm, grey; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

ELECTRICAL CHARACTERISTICS	
Power consumption	max 2,5W
Power supply	max 700mA
Power supply unit	power supply unit not included
Control system	dimming via dimmable driver
Wiring	series
LIGHTING CHARACTERISTICS	
Number and type of LED	1 power LED
Average LED life	50 000h L90 B10 (Ta 25°C)
LED colour	3000K
CRI Colour Rendering Index	>90
Binning	2-step MacAdam
Optics	32°
Lumen output at source	260 lm (3000K, 700mA)
Delivered lumen output	160 lm (3000K, 700mA, 23°)
MECHANICAL CHARACTERISTICS	
Dimensions	Ø22x30 mm
Weight	39 g
Finishes	white RAL 9003
Mounting	with bracket, screws and plugs
Body material	body in anticorodal aluminium, bracket in aluminium
GENERAL CHARACTERISTICS	
Ingress protection	IP40
Operating temperature	0°C — +45°C
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Appliance class	class III
Walkover	no
Drive-over	no
Power cables	includes 1.50 m PVC cable HT105° 2x0,20 Ø3,0 mm
Photobiological safety	in accordance with IEC TR 62778:2014

PHOTOMETRIC DATA

F – 32°

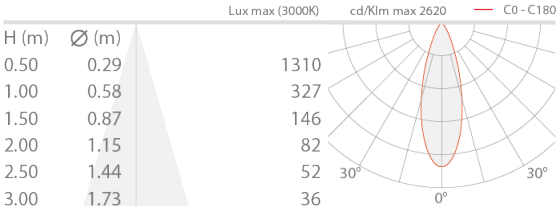

ACCESSORIES

Other

WF0600

PVC cable HT105° 2x0,20 Ø3,0 mm, grey

your choice of length

To be ordered by meter for lengths other than the standard one (1.5 m)

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.