



Made in Italy



Spot 4.4, code: CF4410000050SH

Projectors for outdoor applications


















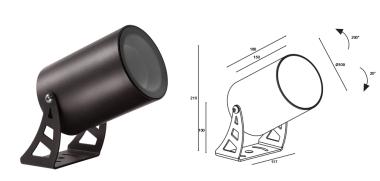

#### **DESCRIPTION**

projector for outdoor applications; surface mounted (ceiling, wall, ground, spike); Power consumption: 22W; Power supply: 230Vac; Lumen output at source: 2073 lm (3000K, 22W); Delivered lumen output: 1818 lm (3000K, 14°, 22W); 1 COB LED, 2-step MacAdam, 60 000h L80 B10 (Ta 25°C); LED colour: 3000K; Optics: 14°: optical system consisting of a high-efficiency TIR lens; CRI Colour Rendering Index: 80; Body material: body made of ANTICORODAL 6026 low-copper-content aluminium alloy for excellent resistance to corrosion, made on a CNC lathe. Bracket made of tumblefinished, painted aluminium 5754; Finishes: anthracite finish obtained through an initial treatment with a ceramic nanoparticle coating, to prepare for painting, followed by a coat of epoxy paint and one of polyester paint to provide corrosion resistance of more than 1000 hours of salt spray; RAL finish on request; Screen material: 5-mm-thick transparent extra-clear glass, with high transmittance to ensure chromatic uniformity of light and tempered for excellent resistance to knocks and scratches, with RAL 7015 grey vitrified serigraphy around the edge; built-in power supply unit; includes 1.50 m neoprene cable H05RN-F 3x1,0 Ø7 mm; Control system: ON/OFF; Ingress protection: IP66; Impact resistance: IK08; version with honeycomb louvre available on request; Protection systems: IPS (Intelligent Protection System) protects lighting fixtures from water infiltrations, which can occur if there are faulty junctions between the cables in outdoor or underwater applications. This innovation, patented by L&L, also guarantees electrical protection against polarity reversal, hot plugging, ESD and power surges, which can occur if there are faults in the electrical circuit; Operating temperature: -20°C - +45°C; Glow wire test: 960°C; Photobiological safety: in accordance with IEC TR 62778:2014; Appliance class: class I; Weight: 2500 g; Dimensions: Ø109x179 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WB1101H Standard snoot - anthracite, WB1102H Asymmetrical snoot - anthracite, WP0300 Spike for in-ground installation; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

# DATASHEET TECHNICAL DATA



ELECTRICAL CHARACTERISTICS	
Power consumption	22W
Power supply	230Vac
Power supply unit	built-in power supply unit
Control system	ON/OFF
LIGHTING CHARACTERISTICS	
Number and type of LED	1 COB LED
Average LED life	60 000h L80 B10 (Ta 25°C)
LED colour	3000K
CRI Colour Rendering Index	80
Binning	2-step MacAdam
Optics	14°
Lumen output at source	2073 lm (3000K, 22W)
Delivered lumen output	1818 lm (3000K, 14°, 22W)
MECHANICAL CHARACTERISTICS	
Dimensions	Ø109x179 mm
Weight	2500 g
Finishes	anthracite
Mounting	with bracket, screws and plugs
Body material	body in anticorodal aluminium, bracket in aluminium
Screen material	screen in serigraphed-grey and transparent, tempered extra-clear glass
GENERAL CHARACTERISTICS	
Ingress protection	IP66
Operating temperature	-20°C — +45°C
Impact resistance	IK08
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Glow wire test	960°C
Appliance class	class I
Walkover	no
Drive-over	no
Power cables	includes 1.50 m neoprene cable H05RN-F 3x1,0 Ø7 mm
Protection systems	IPS (Intelligent Protection System)
Photobiological safety	in accordance with IEC TR 62778:2014
Notes	version with honeycomb louvre available on request

#### PHOTOMETRIC DATA AND ACCESSORIES



#### PHOTOMETRIC DATA

$$S-14^{\circ}$$

		Lux max (3000K)	cd/Klm max 13905 — C0 - C180
H (m)	Ø (m)	22W 32W	112/1/
1.00	0.25	25279 34637	
2.00	0.51	6320 8659	
3.00	0.76	2809 3849	
4.00	1.01	1580 2165	30°
5.00	1.27	1011 1385	0°

#### **ACCESSORIES**

## Installation Accessories





WP0300 Spike for in-ground installation

### Anti-glare





WB1101H Standard snoot - anthracite

WB1102H Asymmetrical snoot - anthracite

 $L\&L\ Luce\&Light\ SRL\ reserves\ the\ right\ to\ change\ the\ information\ contained\ in\ this\ document\ at\ any\ time\ without\ prior\ notice\ being\ given.$