


Made in Italy



Reiko 3.0, code: RK30010001N0L5

Projectors for outdoor applications

26/12/2025 Rev. 02/2024

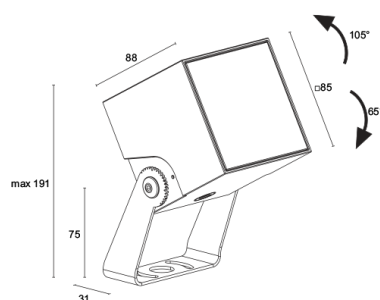

DESCRIPTION

projector for outdoor applications; surface mounted (ceiling, wall, ground, spike); Power consumption: 15W; Power supply: 24Vdc; Lumen output at source: 1747 lm (3000K, 15W, CRI 80); Delivered lumen output: 1124 lm (3000K, 37°, 15W, CRI 80); 1 COB LED, 2-step MacAdam, 60 000h L90 B10 (Ta 25°C); LED colour: 2200K; Optics: 37°; CRI Colour Rendering Index: 80; Body material: body made of low-copper-content die-cast aluminium alloy EN AB 47100 for excellent resistance to corrosion. Bracket in AISI 316L stainless steel, tumble finished and painted; Finishes: jasper green finish obtained through an initial treatment with a ceramic nanoparticle coating, to prepare for painting, followed by a coat of epoxy paint and one of polyester paint to provide corrosion resistance of more than 1500 hours of salt spray. Paints compliant with the Qualicoat standard used in the automotive sector; RAL finish on request; Screen material: 4-mm-thick transparent, tempered extra-clear glass, high-transmittance with grey-vitrified serigraphy (RAL 7015), to ensure chromatic uniformity and excellent resistance to knocks and scratches; power supply unit not included; includes 1.50 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm; Ingress protection: IP66, IP69 (80°C); Impact resistance: IK06; Casambi control using the Casambi app with dedicated electronics; Operating temperature: -20°C — +45°C; Glow wire test: 960°C; Photobiological safety: in accordance with IEC TR 62778:2014; Appliance class: class III; Weight: 1250 g; Dimensions: 85x85x90 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: honeycomb louvre, WBA125 Standard square snoot - jasper green, WBA135 Asymmetrical square snoot - jasper green, WP0100 Spike for in-ground installation, WP1004 Fastener strap - 5 m, WP10065 Spike for in-ground installation - h 500 mm - jasper green, WP10075 Spike for in-ground installation - h 800 mm - jasper green; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

ELECTRICAL CHARACTERISTICS

| | |
|-------------------|--------------------------------|
| Power consumption | 15W |
| Power supply | 24Vdc |
| Power supply unit | power supply unit not included |

LIGHTING CHARACTERISTICS

| | |
|----------------------------|-----------------------------------|
| Number and type of LED | 1 COB LED |
| Average LED life | 60 000h L90 B10 (Ta 25°C) |
| LED colour | 2200K |
| CRI Colour Rendering Index | 80 |
| Binning | 2-step MacAdam |
| Optics | 37° |
| Lumen output at source | 1747 lm (3000K, 15W, CRI 80) |
| Delivered lumen output | 1124 lm (3000K, 37°, 15W, CRI 80) |

MECHANICAL CHARACTERISTICS


| | |
|-----------------|--|
| Dimensions | 85x85x90 mm |
| Weight | 1250 g |
| Finishes | jasper green |
| Body material | body in die-cast aluminium, AISI 316L stainless steel bracket |
| Screen material | screen in serigraphed-grey and transparent, tempered extra-clear glass |

GENERAL CHARACTERISTICS

| | |
|-------------------------|--|
| Ingress protection | IP66, IP69 (80°C) |
| Operating temperature | -20°C — +45°C |
| Impact resistance | IK06 |
| Energy efficiency class | F (light source) in accordance with EU 2019/2015 |
| Glow wire test | 960°C |
| Appliance class | class III |
| Walkover | no |
| Drive-over | no |
| Power cables | includes 1.50 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm |
| Photobiological safety | in accordance with IEC TR 62778:2014 |
| Notes | Casambi control using the Casambi app with dedicated electronics |


PHOTOMETRIC DATA

L – 37° CRI80

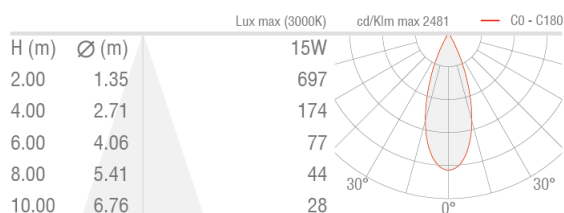


ACCESSORIES

Installation Accessories



WP0100

Spike for in-ground installation



WP10065


Spike for in-ground installation - h 500 mm - jasper green



WP10075

Spike for in-ground installation - h 800 mm - jasper green


Anti-glare



honeycomb louvre


built into the lighting fixture

Add the optical accessory in the code generator



WBA125

Standard square snoot - jasper green

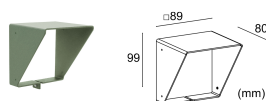

WBA135

Asymmetrical square snoot - jasper green

Other



WP1004

Fastener strap - 5 m

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.