


Made in Italy



Reiko 3.0, code: RK3001000350PE

Projectors for outdoor applications

12/09/2026 Rev. 02/2024

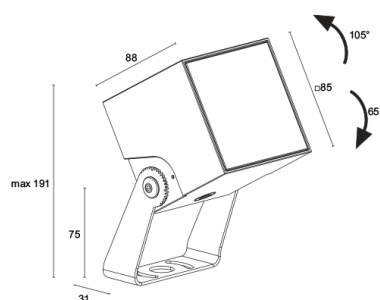

DESCRIPTION

projector for outdoor applications; surface mounted (ceiling, wall, ground, spike); Power consumption: 15W; Power supply: 24Vdc; Lumen output at source: 1747 lm (3000K, 15W, CRI 80); Delivered lumen output: 1124 lm (3000K, 37°, 15W, CRI 80); 1 COB LED, 2-step MacAdam, 60 000h L90 B10 (Ta 25°C); LED colour: 3000K; Optics: sharp 32°: SHARP optical system consisting of a plano-convex lens for an extremely well-defined light beam, combined with a high-quality technical filter; CRI Colour Rendering Index: 80; Body material: body made of low-copper-content die-cast aluminium alloy EN AB 47100 for excellent resistance to corrosion. Bracket in AISI 316L stainless steel, tumble finished and painted; Finishes: white finish obtained through an initial treatment with a ceramic nanoparticle coating, to prepare for painting, followed by a coat of epoxy paint and one of polyester paint to provide corrosion resistance of more than 1500 hours of salt spray. Paints compliant with the Qualicoat standard used in the automotive sector (RAL 9003); RAL finish on request; Screen material: 4-mm-thick transparent extra-clear glass, with high transmittance to ensure chromatic uniformity of light and tempered for excellent resistance to knocks and scratches, with RAL 7015 grey vitrified serigraphy around the edge; power supply unit not included; includes 1.50 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm; Ingress protection: IP66, IP69 (80°C); Impact resistance: IK06; Casambi control using the Casambi app with dedicated electronics; Protection systems: IPS (Intelligent Protection System) protects lighting fixtures from water infiltrations, which can occur if there are faulty junctions between the cables in outdoor or underwater applications. This innovation, patented by L&L, also guarantees electrical protection against polarity reversal, hot plugging, ESD and power surges, which can occur if there are faults in the electrical circuit; Operating temperature: -20°C — +45°C; Glow wire test: 960°C; Photobiological safety: in accordance with IEC TR 62778:2014; Appliance class: class III; Weight: 1250 g; Dimensions: 85x85x90 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: shadow-effect filter, WBA12E Standard square snoot - white, WBA13E Asymmetrical square snoot - white, WE0201 Magnet for adjustable optics and zoom lens, WP0300 Spike for in-ground installation, WP1004 Fastener strap - 5 m, WP1006E Spike for in-ground installation - h 500 mm - white, WP1007E Spike for in-ground installation - h 800 mm - white; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

ELECTRICAL CHARACTERISTICS

Power consumption	15W
Power supply	24Vdc
Power supply unit	power supply unit not included

LIGHTING CHARACTERISTICS

Number and type of LED	1 COB LED
Average LED life	60 000h L90 B10 (Ta 25°C)
LED colour	3000K
CRI Colour Rendering Index	80
Binning	2-step MacAdam
Optics	sharp 32°
Lumen output at source	1747 lm (3000K, 15W, CRI 80)
Delivered lumen output	1124 lm (3000K, 37°, 15W, CRI 80)

MECHANICAL CHARACTERISTICS


Dimensions	85x85x90 mm
Weight	1250 g
Finishes	white RAL 9003
Body material	body in die-cast aluminium, AISI 316L stainless steel bracket
Screen material	screen in serigraphed-grey and transparent, tempered extra-clear glass

GENERAL CHARACTERISTICS

Ingress protection	IP66, IP69 (80°C)
Operating temperature	-20°C — +45°C
Impact resistance	IK06
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Glow wire test	960°C
Appliance class	class III
Walkover	no
Drive-over	no
Power cables	includes 1.50 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm
Protection systems	IPS (Intelligent Protection System)
Photobiological safety	in accordance with IEC TR 62778:2014
Notes	Casambi control using the Casambi app with dedicated electronics


PHOTOMETRIC DATA

P – 32° Sharp CRI80

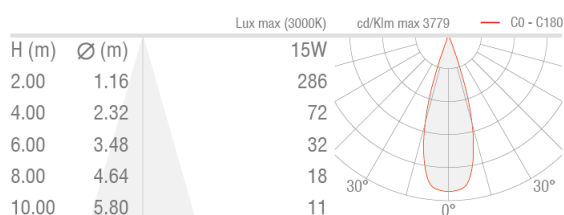


ACCESSORIES

Installation Accessories




WP0300

Spike for in-ground installation



WP1006E


Spike for in-ground installation - h 500 mm - white



WP1007E


Spike for in-ground installation - h 800 mm - white

Anti-glare



WBA12E

Standard square snout - white



WBA13E

Asymmetrical square snout - white

Optical Accessories



shadow-effect filter

built into the lighting fixture

the shadow-effect filter can be fitted to the sharp optics
Add the optical accessory in the code generator

Other



WE0201

Magnet for adjustable optics and zoom lens



WP1004

Fastener strap - 5 m

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.