
Made in Italy

Olo BLVD 1.0, code: LB10110D00NRRH

Urban lighting

kg 2,20 (360°) | kg 2,40 (180°) IP66 IK10 DALI-2 PUSH F



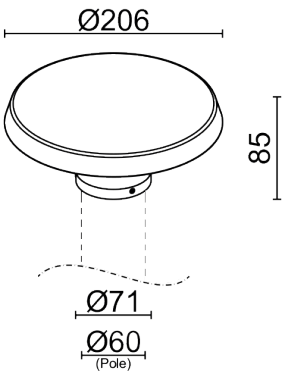


DESCRIPTION


Urban lighting; pole mounted Ø60 mm, surface mounted (pole); Power consumption: 34W; Power supply: 110-230Vac; Lumen output at source: 5760 lm (3000K, 34W); Delivered lumen output: 3640 lm (3000K, 360°, 34W); 156 mid-power LEDs, 3-step MacAdam, 60 000h L90 B10 (Ta 25°C); LED colour: 2200K; Optics: radial 360°; CRI Colour Rendering Index: 80; Body material: Head made of low-copper-content die-cast aluminium alloy EN AB 47100 for excellent resistance to corrosion.; Finishes: anthracite finish obtained through an initial treatment with a ceramic nanoparticle coating, to prepare for painting, followed by a coat of epoxy paint and one of polyester paint to provide corrosion resistance of more than 1500 hours of salt spray. Paints compliant with the Qualicoat standard used in the automotive sector; RAL finish on request; Screen material: screen made of optical grade polycarbonate with anti-UV coating, characterised by excellent resistance to impacts; Seals: the silicone rubber gaskets guarantee maximum resistance to UV rays and unchanging mechanical characteristics over time; built-in power supply unit; Control system: PUSH, DALI-2; Ingress protection: IP66; Impact resistance: IK10; Operating temperature: -20°C — +50°C; Photobiological safety: in accordance with IEC TR 62778:2014; Appliance class: class I; Weight: 2200 g (360°) - 2400 g (180°); Dimensions: Ø206x85 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WDA29H Pole adapter ø 76 mm - anthracite, WFA02 IP68 “h”-type three-way connector (82x53.3x28 mm), WPA17H Pole ø 60 mm, WPA18H Pole ø 76 mm; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption


Status: Available

ELECTRICAL CHARACTERISTICS	
Power consumption	34W
Power supply	110-230Vac
Power supply unit	built-in power supply unit
Control system	PUSH, DALI-2
LIGHTING CHARACTERISTICS	
Number and type of LED	156 mid-power LEDs
Average LED life	60 000h L90 B10 (Ta 25°C)
LED colour	2200K
CRI Colour Rendering Index	80
Binning	3-step MacAdam
Optics	radial 360°
Lumen output at source	5760 lm (3000K, 34W)
Delivered lumen output	3640 lm (3000K, 360°, 34W)
MECHANICAL CHARACTERISTICS	
Dimensions	Ø206x85 mm
Weight	2200 g (360°) - 2400 g (180°)
Finishes	anthracite
Mounting	screw fastening system
Body material	die-cast aluminium
Screen material	screen in optical grade PC
GENERAL CHARACTERISTICS	
Ingress protection	IP66
Operating temperature	-20°C — +50°C
Impact resistance	IK10
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Appliance class	class I
Walkover	no
Drive-over	no
Photobiological safety	in accordance with IEC TR 62778:2014

PHOTOMETRIC DATA

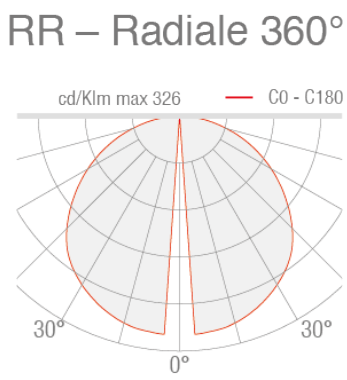


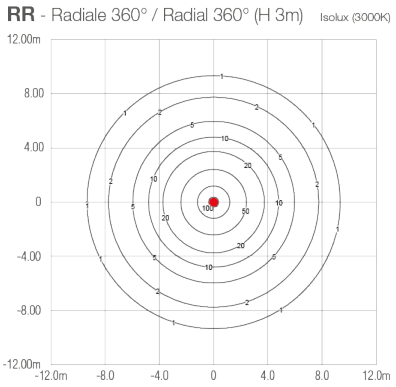

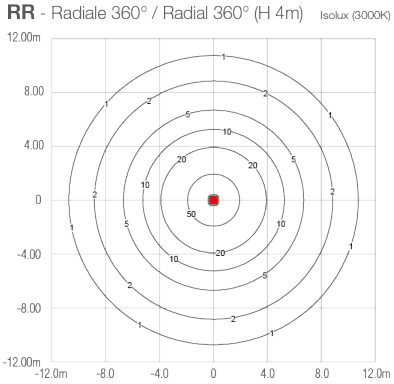

ACCESSORIES


Other




WDA29H
Pole adapter ø 76 mm - anthracite



WFA02
IP68 “h”-type three-way connector (82x53.3x28 mm)
4-pin
IP68
82x53.3x28 mm



WPA17H
Pole ø 60 mm



WPA18H
Pole ø 76 mm

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.