DATASHEET

Made in Italy

05/11/2026 Rev. 00


Neva Mini Pro 7, code: NP0700000170SN

Linear profiles for outdoor applications

kg 500 - kN 5 kg 0,60 IP66 IP67 IK06 IPS NTC

T max 45°C A F



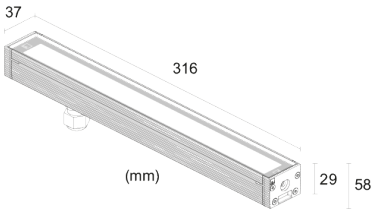

DESCRIPTION

linear profile for outdoor applications; walkover up to 500 kg; surface mounted (ceiling, wall, floor) with brackets or recessed (ceiling, floor, wall) with outer casing; Power consumption: 16W; Power supply: 24Vdc; Lumen output at source: 944 lm, R: 168 lm G: 437 lm B: 74 lm W: 368 lm (3000K); Delivered lumen output: 662 lm, R: 145 lm G: 269 lm B: 60 lm W: 258 lm (3000K, 15°); 5 power LEDs multicolor High Intensity, 50 000h L90 B10 (Ta 25°C); LED colour: RGBW; Optics: 15° (Optics): optical system composed of a series of equidistant light sources, 60 mm apart. The deep-set TIR lens guarantees high-quality light emission and visual comfort; Body material: body made of ANTICORODAL 6060 aluminium alloy, made entirely on a CNC lathe and painted black (RAL 9005 matt); Finishes: black (RAL 9005); Screen material: 4-mm-thick extra-clear acid-etched glass, with high transmittance to ensure colour uniformity and tempered for excellent resistance to knocks and scratches, and grey vitrified serigraphy (RAL 7015); Seals: Black peroxide EPDM O-rings guarantee lasting resistance to UV rays; power supply unit not included; includes 1.50 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm; Ingress protection: IP66, IP67; Impact resistance: IK06; Protection systems: IPS (Intelligent Protection System) protects lighting fixtures from water infiltrations, which can occur if there are faulty junctions between the cables in outdoor or underwater applications. This innovation, patented by L&L, also guarantees electrical protection against polarity reversal, hot plugging, ESD and power surges, which can occur if there are faults in the electrical circuit; This is an NTC thermistor mounted on the LED board to protect the lighting fixture against overheating. Should the product function at an operating temperature greater than the maximum temperature at which it can operate correctly, the protection is activated and gradually reduces the power. The NTC causes the integrated electronic parts to cool down to avoid the lighting fixture instantly switching itself off. When the operating temperature is again within normal range, the NTC automatically restores the lighting fixture's original operating conditions; Operating temperature: -20°C — +50°C; Maximum device temperature: 45°C (Ta 25°C); Photobiological safety: in accordance with IEC TR 62778:2014; Appliance class: class III; Weight: 600 g; Dimensions: 316x37x58 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: honeycomb louvre, WB6500 Anti-glare shield in black-painted stainless steel - 328 mm, WC6500 Aluminium outer casing - 322 mm, WC6700 Aluminium outer casing for plasterboard - 322 mm, WMA09N Pair of brackets h 75 mm, WMA10N Pair of brackets h 140 mm, WN6001 Anti-fall kit, WN6002 U-shaped brackets pair, WN6003 Springs pair, WN6005 Alignment kit for outer casing, WN6006 Pair of extractors for outer casings; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption


Status: Available

ELECTRICAL CHARACTERISTICS	
Power consumption	16W
Power supply	24Vdc
Power supply unit	power supply unit not included
LIGHTING CHARACTERISTICS	
Number and type of LED	5 power LEDs multicolor High Intensity
Average LED life	50 000h L90 B10 (Ta 25°C)
LED colour	RGBW
Optics	15° (Optics)
Lumen output at source	944 lm, R: 168 lm G: 437 lm B: 74 lm W: 368 lm (3000K)
Delivered lumen output	662 lm, R: 145 lm G: 269 lm B: 60 lm W: 258 lm (3000K, 15°)
MECHANICAL CHARACTERISTICS	
Dimensions	316x37x58 mm
Weight	600 g
Finishes	black RAL 9005
Mounting	with adjustable brackets and screws or with outer casing
Body material	body in black-painted anticorodal aluminium
Screen material	screen in grey-serigraphed, acid-etched, tempered extra-clear glass
GENERAL CHARACTERISTICS	
Ingress protection	IP66, IP67
Operating temperature	-20°C — +50°C
Impact resistance	IK06
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Maximum device temperature	45°C (Ta 25°C)
Appliance class	class III
Drive-over	no
Walkover	up to 500 kg
Power cables	includes 1.50 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm
Protection systems	IPS (Intelligent Protection System); NTC (thermistor mounted on LED board)
Photobiological safety	in accordance with IEC TR 62778:2014

PHOTOMETRIC DATA


S – 15°

H (m)	Ø (m)	Lux max (3000K) 16W	cd/Klm max 6730 — C0 - C180
1.00	0.27	1770	
2.00	0.54	443	
3.00	0.80	197	
4.00	1.07	111	
5.00	1.34	71	




ACCESSORIES

Installation Accessories




WC6500
Aluminium outer casing - 322 mm
Retaining spring clip (WN6003) included



WC6700
Aluminium outer casing for plasterboard - 322 mm
Retaining spring clip (WN6003) included

Anti-glare



honeycomb louvre

built into the lighting fixture
Add the optical accessory in the code generator



WB6500
Anti-glare shield in black-painted stainless steel - 328 mm

Other




WMA09N
Pair of brackets h 75 mm



WMA10N
Pair of brackets h 140 mm





WN6001
Anti-fall kit



WN6002
U-shaped brackets pair



WN6003
Springs pair



WN6005
Alignment kit for outer casing

WN6006
Pair of extractors for outer casings

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.