


Made in Italy

 **Turis Mini 1.1, code: MT11115DC**  
Recessed for indoor applications

07/03/2026 Rev. 11/2024




 on request
 
 230Vac
  kg 0,15
  Ø40 mm
 IP40
 
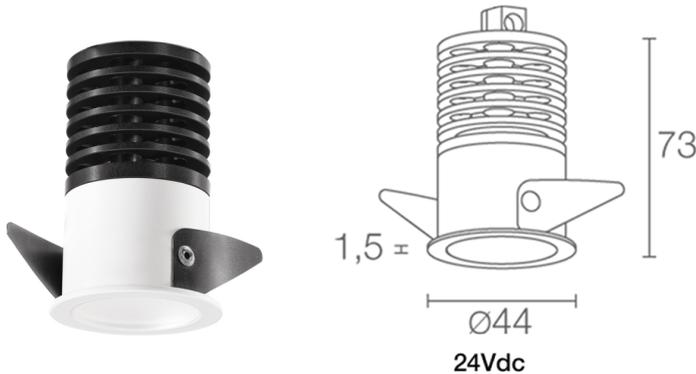
## DESCRIPTION

recessed downlight for indoor applications; recessed (ceiling); Power consumption: 5,5W; Power supply: 230Vac; Lumen output at source: 460 lm (3000K); Delivered lumen output: 310 lm (3000K); 1 multichip power LED, 3-step MacAdam, 50 000h L80 B10 (Ta 25°C); LED colour: 3000K; Optics: diffuse; CRI Colour Rendering Index: >90; Body material: body in black-anodized aluminium, trim in steel; Finishes: chrome; RAL finish on request; Screen material: screen in one-side-frosted, transparent plexiglass; Thickness of installation surface: min 5 mm, max 25 mm; power supply unit included; includes 0.30 m cable; Control system: ON/OFF; Ingress protection: IP40; version with LED colour RGB available on request; Casambi control using the Casambi app with dedicated electronics; Operating temperature: 0°C — +45°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class II; Weight: 150 g; Dimensions: Ø44x73 mm; Cutout dimensions: Ø40 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WC3108 Outer casing for solid walls; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

### ELECTRICAL CHARACTERISTICS

Power consumption	5,5W
Power supply	230Vac
Power supply unit	power supply unit included
Control system	ON/OFF

### LIGHTING CHARACTERISTICS

Number and type of LED	1 multichip power LED
Average LED life	50 000h L80 B10 (Ta 25°C)
LED colour	3000K
CRI Colour Rendering Index	>90
Binning	3-step MacAdam
Optics	diffuse
Lumen output at source	460 lm (3000K)
Delivered lumen output	310 lm (3000K)

### MECHANICAL CHARACTERISTICS


Dimensions	Ø44x73 mm
Weight	150 g
Finishes	chrome
Mounting	with fixing springs
Body material	body in black-anodized aluminium, trim in steel
Screen material	screen in one-side-frosted, transparent plexiglass
Cutout dimensions	Ø40 mm

### GENERAL CHARACTERISTICS

Ingress protection	IP40
Operating temperature	0°C — +45°C
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Appliance class	class II
Walkover	no
Drive-over	no
Power cables	includes 0.30 m cable
Photobiological safety	photobiological safety: risk group 1 according to EN 62471:2006
Notes	version with LED colour RGB available on request; Casambi control using the Casambi app with dedicated electronics

## PHOTOMETRIC DATA

### D – Diffuse

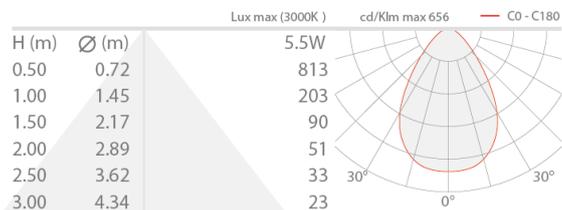


## ACCESSORIES

### Installation Accessories



#### WC3108

Outer casing for solid walls

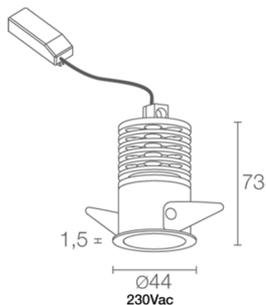

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.