


Made in Italy

 Rondò 3.2, code: RD32009AH
Step lights for outdoor applications

18/02/2026 Rev. 11/2024

 UK   LED TECH  24Vdc  kg 5000 - kN 50  kg 1,80 IP65 IP67 IK08 

  T max 45°C 

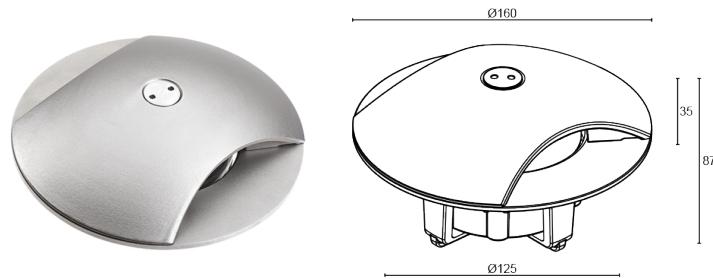

DESCRIPTION

step light for outdoor applications, double beam; drive-over up to 5000 kg; walkover; recessed (floor); Power consumption: 5W; Power supply: 24Vdc; Lumen output at source: 370 lm (3000K); Delivered lumen output: 180 lm (3000K, radial optics); 2 power LEDs, 1/4 ANSI BIN, 50 000h L95 B10 (Ta 25°C); LED colour: 4000K; Optics: radial; optical system consisting of a high-efficiency TIR lens; Upward flux fraction: 38,18% (radial optics), 21,13% (10°); CRI Colour Rendering Index: 80; Body material: body made of micro-cast AISI 316L stainless steel, produced entirely on a CNC lathe; Finishes: anthracite finish obtained through micro-shot peening, an electrolytic passivation treatment and electropolishing; then painted through an initial treatment with a ceramic nanoparticle coating, to prepare for painting, followed by a coat of epoxy paint and one of polyester paint, to provide corrosion resistance of more than 1000 hours of salt spray testing. Paints compliant with the Qualicoat standard used in the automotive sector; RAL finish on request; Screen material: Rilsan® Clear protective screen in clear PA12 polyamide with high mechanical and optical performance; Seals: O-ring in 4-mm expanded silicone; power supply unit not included; includes 1.5 m neoprene cable, H05RN-F 2x0,35/0,75 Ø6,3 mm; Control system: ON/OFF, Casambi; Ingress protection: IP65, IP67; Impact resistance: IK08; Casambi control using the Casambi app with dedicated electronics; Protection systems: IPS (Intelligent Protection System) protects lighting fixtures from water infiltrations, which can occur if there are faulty junctions between the cables in outdoor or underwater applications. This innovation, patented by L&L, also guarantees electrical protection against polarity reversal, hot plugging, ESD and power surges, which can occur if there are faults in the electrical circuit; The PID (Protective Impedance Device) protects lighting fixtures from electrical phenomena external to the system, such as static electricity accumulation or electromagnetic interference coming from the mains power. Generally, these are events with a low energy content; Operating temperature: -20°C — +45°C; Maximum device temperature: 45°C (Ta 25°C); Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class III; Weight: 1800 g; Dimensions: Ø160x87 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WC0601 Outer casing, WC0701 Outer casing, WE0100 Tool for tamper-resistant screws; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

ELECTRICAL CHARACTERISTICS

Power consumption	5W
Power supply	24Vdc
Power supply unit	power supply unit not included
Control system	ON/OFF, Casambi

LIGHTING CHARACTERISTICS

Number and type of LED	2 power LEDs
Average LED life	50 000h L95 B10 (Ta 25°C)
LED colour	4000K
CRI Colour Rendering Index	80
Binning	1/4 ANSI BIN
Optics	radial
Lumen output at source	370 lm (3000K)
Delivered lumen output	180 lm (3000K, radial optics)


MECHANICAL CHARACTERISTICS

Dimensions	Ø160x87 mm
Weight	1800 g
Finishes	anthracite
Mounting	with outer casing
Body material	body in AISI 316L stainless steel
Screen material	screen in Rilsan® Clear

GENERAL CHARACTERISTICS


Ingress protection	IP65, IP67
Operating temperature	-20°C — +45°C
Impact resistance	IK08
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Maximum device temperature	45°C (Ta 25°C)
Appliance class	class III
Walkover	yes
Drive-over	up to 5000 kg
Power cables	includes 1.5 m neoprene cable, H05RN-F 2x0,35/0,75 Ø6,3 mm
Protection systems	IPS (Intelligent Protection System); PID (Protective Impedance Device)
Photobiological safety	photobiological safety: risk group 1 according to EN 62471:2006
Notes	Casambi control using the Casambi app with dedicated electronics

PHOTOMETRIC DATA

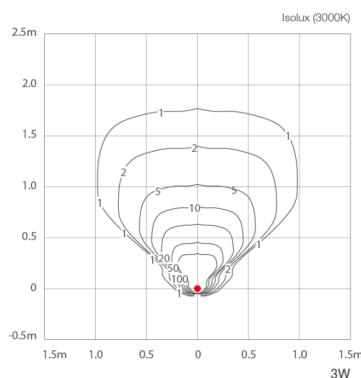

ACCESSORIES

Installation Accessories



WC0601
Outer casing




WC0701
Outer casing

Other



WE0100
Tool for tamper-resistant screws



L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.