


OUTDOOR RECESSED UPLIGHTS LIGHTING FOR WALKWAYS



BEAM 1.0

Ø 80 mm H 100 mm Ø 45 mm



POWER / POWER SUPPLY CODE

max 3W max 700mA blue/white light
CD1013 ■ **A I** - ■ Stainless steel
CD1013 ■ **A F** - ■ Grey
 max 3W max 350mA RGB light
CD1011 6 ■ **A I** - ■ Stainless steel
CD1011 6 ■ **A F** - ■ Grey

■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
■ OPTICS	S - 8° M - 26° L - 44° D - diffuse RGB: S - 19° M - 30° L - 37° D - diffuse
■ POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm RGB: includes 1.5 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

LUMEN OUTPUT AT SOURCE	184 lm (3000K, 700mA) RGB: 217 lm, R: 80 lm G: 104 lm B: 33 lm (350mA)
DELIVERED LUMEN OUTPUT	114 lm (3000K, 700mA, 26°) RGB: 154 lm, R: 57 lm G: 74 lm B: 23 lm (350mA, 19°)
NO. AND TYPE OF LED	1 power LED, 1/4 ANSI BIN (white LED colour) RGB: 3 full-colour LEDs 50000h L80 B10 (Ta 25°C)
MATERIAL	body in anodized aluminium trim in AISI 316L stainless steel or aluminium screen in transparent extra-clear glass (optics version) screen in sandblasted extra-clear glass (diffuse version)
POWER SUPPLY UNIT	not included, see p. 904 and 917
WIRING	series
MOUNTING	recessed (ceiling, wall, ground)
ACCESSORIES	see p. 143
NOTES	version with 24Vdc power supply and version certified ETL available on request
PHOTOMETRIC DATA	see p. 781



< **BEAM 1.0**
RGB, 3W, 30°, stainless steel

Project and light planning by / DVDV Studio Architetti
 Photo by / Alessio Tamborini
 Private residence, Milan, Italy



ACCESSORIES

ACCESSORIES FOR INSTALLATION




WC1501
Outer casing




OUTDOOR RECESSED

BEAM 1.0


S - 8°

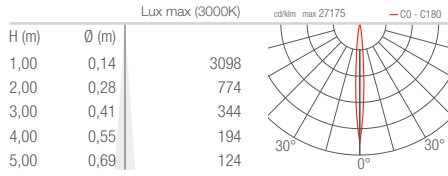

M - 26°

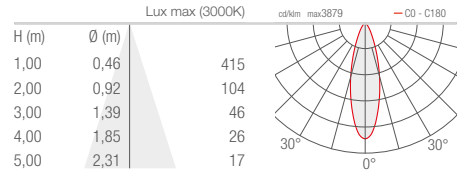

L - 44°

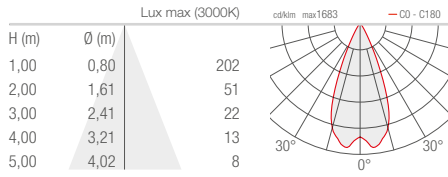

D - Diffuse

