


OUTDOOR STEP LIGHTS ORIENTATION LIGHTING

2700K 3000K 4000K blue

RADIAL OPTICS Ø39 mm

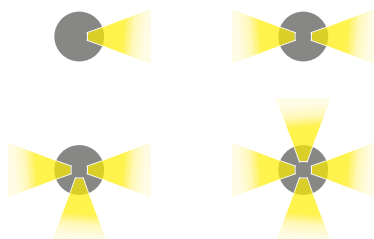

BRIGHT 1.A p. 415
max 2W max 700mA
constant current



BRIGHT 1.B p. 415
2.5W/3.5W 24Vdc
constant voltage

Ø78 mm





BRIGHT 4.7 p. 417
2W 24Vdc
constant voltage

Ø130 mm



BRIGHT 9.7 p. 417
4W 24Vdc
constant voltage



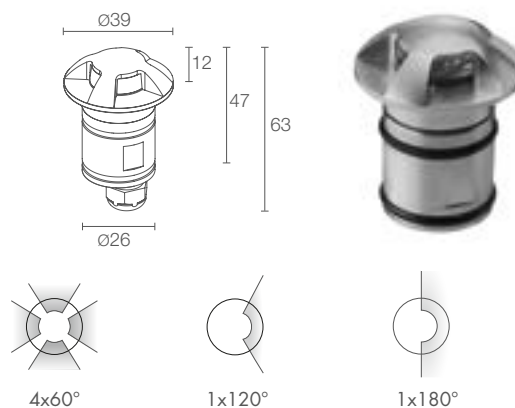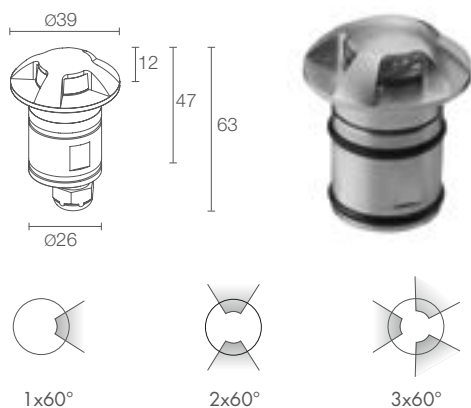

BRIGHT 1.A

Ø 80 mm
H 100 mm



kg 0.20 IP65 IP68 IK10

A A+ A++ IPS CASAMBI T max 50°C

POWER / POWER SUPPLY CODE

max 2W max 700mA
CB1A130 T I - Stainless steel

| | |
|--------------|---|
| LED COLOUR | F - 2700K 5 - 3000K 9 - 4000K 1 - blue |
| BEAMS | R1 - 1x60° R2 - 2x60° R3 - 3x60° R4 - 4x60° R5 - 1x120° R6 - 1x180° |
| POWER CABLES | includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m |
| OPTICS | radial |

BRIGHT 1.B

Ø 80 mm
H 100 mm



kg 0.20 IP65 IP68 IK10

A A+ A++ IPS CASAMBI T max 50°C

2.5W 24Vdc
CB1B000 T I - Stainless steel

3.5W 24Vdc
CB1B010 T I - Stainless steel

| | |
|--------------|---|
| LED COLOUR | F - 2700K 5 - 3000K 9 - 4000K 1 - blue |
| BEAMS | R1 - 1x60° R2 - 2x60° R3 - 3x60° R4 - 4x60° R5 - 1x120° R6 - 1x180° |
| POWER CABLES | includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m |
| OPTICS | radial |


| | |
|------------------------|--|
| LUMEN OUTPUT AT SOURCE | 220 lm (3000K, 700mA) |
| DELIVERED LUMEN OUTPUT | 56 lm (3000K, 700mA, 4x60°) |
| NO. AND TYPE OF LED | 1 power LED 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C) |
| MATERIAL | body and trim in AISI 316L stainless steel |
| POWER SUPPLY UNIT | not included, see p. 904 |
| WIRING | series |
| MOUNTING | recessed (wall, ground) |
| ACCESSORIES | see p. 419 |
| PHOTOMETRIC DATA | see p. 802 |

| | |
|------------------------|--|
| LUMEN OUTPUT AT SOURCE | 220 lm (3000K, 3.5W) |
| DELIVERED LUMEN OUTPUT | 56 lm (3000K, 4x60°, 3.5W) |
| NO. AND TYPE OF LED | 1 power LED 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C) |
| MATERIAL | body and trim in AISI 316L stainless steel |
| POWER SUPPLY UNIT | not included, see p. 904 |
| WIRING | parallel |
| MOUNTING | recessed (wall, ground) |
| ACCESSORIES | see p. 419 |
| PHOTOMETRIC DATA | see p. 802 |

< BRIGHT 1.B
3000K, 3.5W, 2x60°

Project by / arch. **Ciro Alfredo Matarante**
Photo by / **Alessio Tamborini**
Private residence, Foggia, Italy



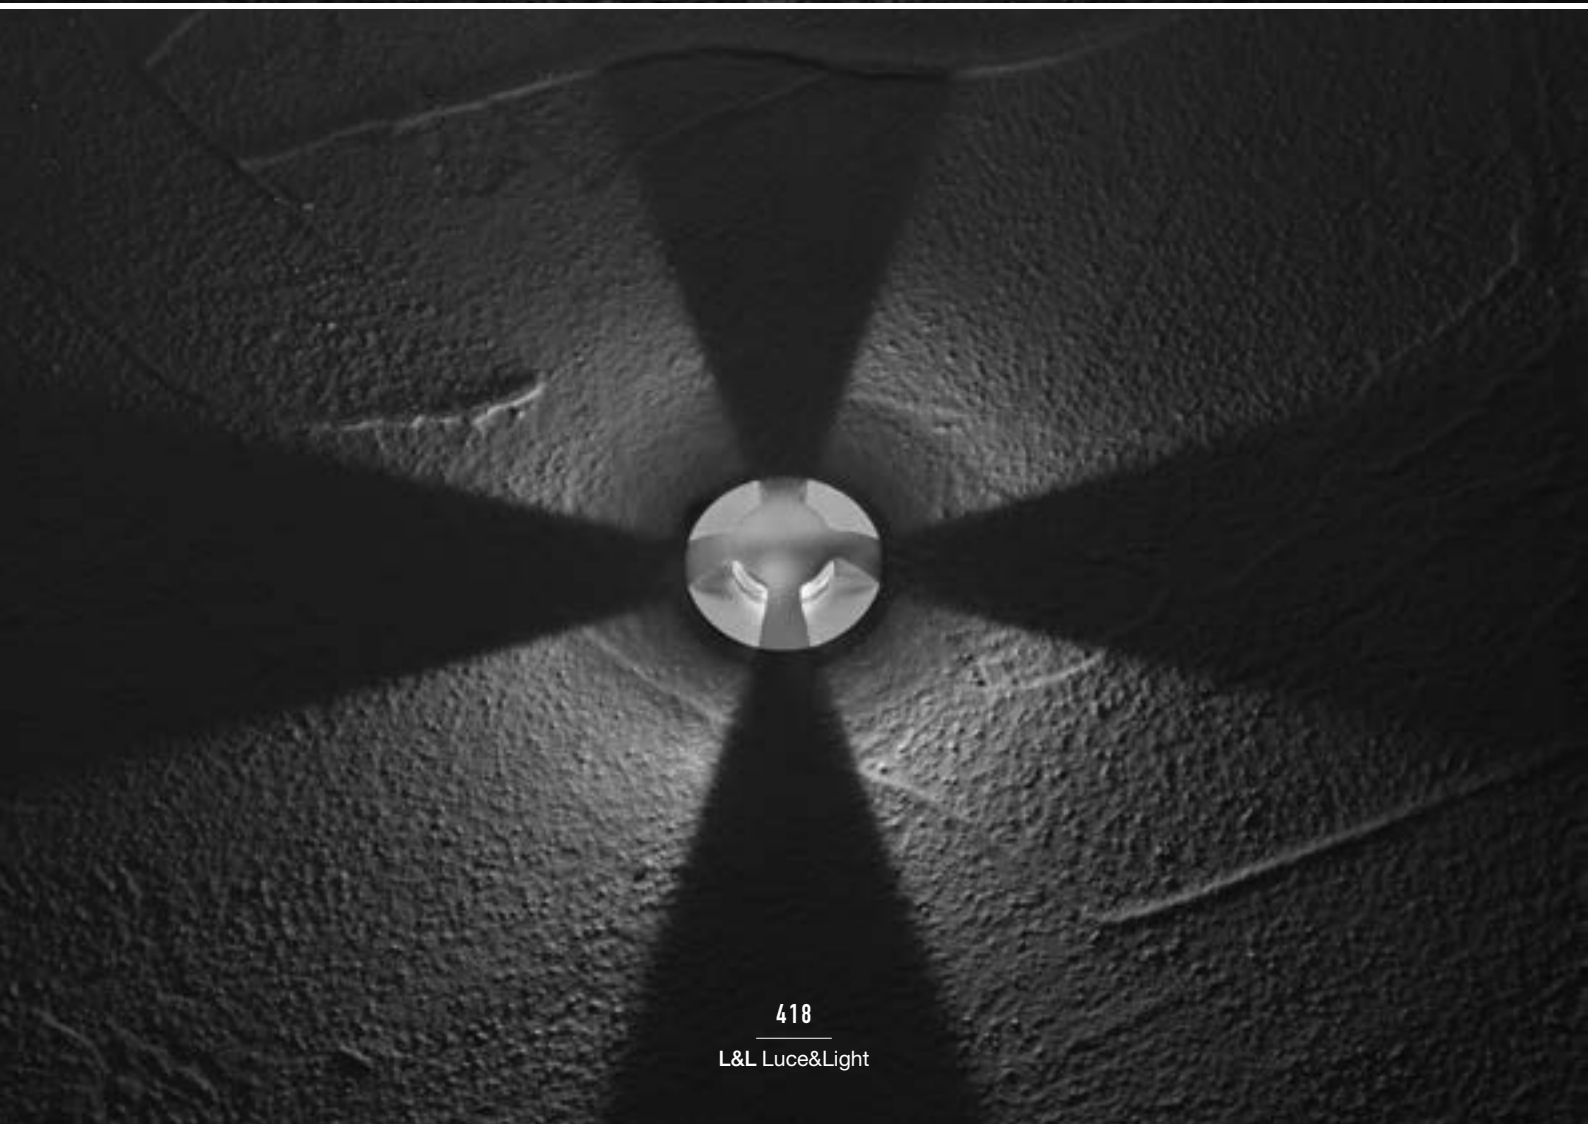

ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC0202
Outer casing
(Bright 1.A / 1.B)



WC0100
Outer casing
(Bright 4.7)



WC0103
Outer casing
(Bright 4.7)



WC0150
Outer casing
(Bright 4.7)



WC0501
Outer casing
(Bright 9.7)



WC0601
Outer casing
(Bright 9.7)



WC0701
Outer casing
(Bright 9.7)


^ **BRIGHT 1.B**
4000K, 2.5W, 1°x180°

< **BRIGHT 1.B**
4000K, 2.5W, 4°x60°


BRIGHT

OUTDOOR STEP LIGHTS


BRIGHT 1.A 1.B

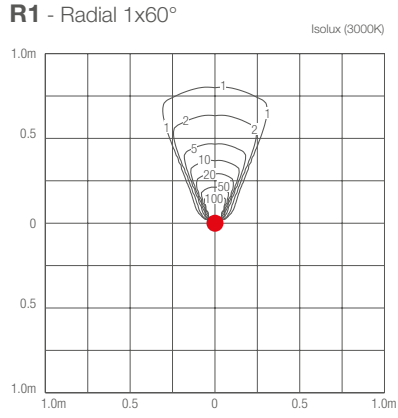

Bright 1.A **2W**
Bright 1.B **3.5W**

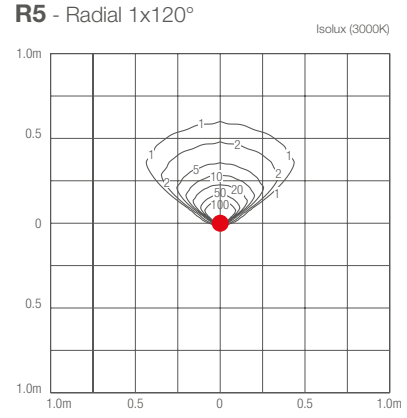


Bright 1.A **2W**
Bright 1.B **3.5W**

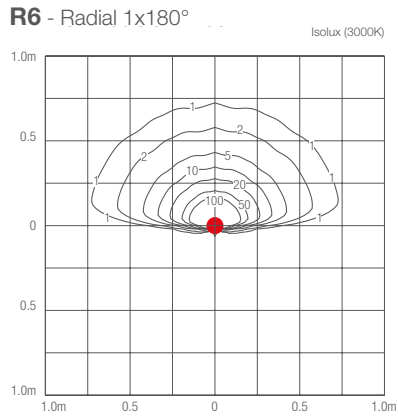

Bright 1.A **2W**
Bright 1.B **3.5W**

BRIGHT 4.7

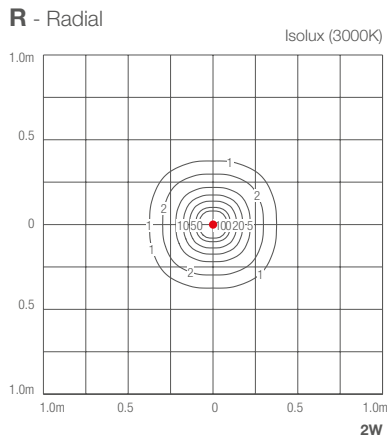

BRIGHT 9.7

