



BRIGHT


OUTDOOR STEP LIGHTS
ORIENTATION LIGHT

RADIAL OPTICS



2700K 3000K 4000K blue

Ø39 mm

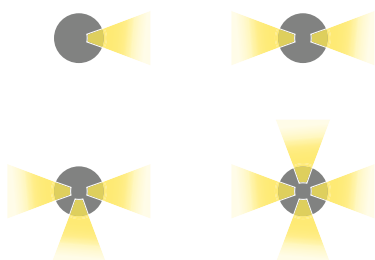

BRIGHT 1.A p. 344
max 2W max 700mA
constant current



BRIGHT 1.B p. 344
2.5W / 3.5W 24Vdc
constant voltage

Ø78 mm



BRIGHT 4.7 p. 347
2W 24Vdc
constant voltage

Ø130 mm





BRIGHT 9.7 p. 347
4W 24Vdc
constant voltage


BRIGHT 1



BRIGHT 1.A

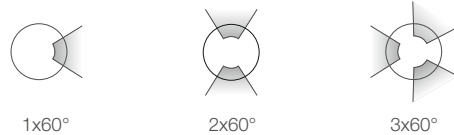

BRIGHT 1.B

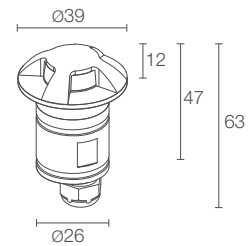

POWER / POWER SUPPLY CODE max 2W max 700mA
CB1A130 ■ ■ T I - ■ Micro-blasted stainless steel

LED COLOUR
F - 2700K
5 - 3000K
9 - 4000K
1 - blue

BEAMS
R1 - 1x60°
R2 - 2x60°
R3 - 3x60°
R4 - 4x60°
R5 - 1x120°
R6 - 1x180°

POWER CABLES
includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm
1 - 5 m
2 - 10 m
3 - 15 m
4 - 20 m

OPTICS radial

LUMEN OUTPUT AT SOURCE 220 lm (3000K, 700mA)

DELIVERED LUMEN OUTPUT 56 lm (3000K, 700mA, 4x60°)

NO. AND TYPE OF LED
1 power LED
1/4 ANSI BIN (white LED colour)
50000h L90 B10 (Ta 25°C)

MATERIAL body and trim in AISI 316L stainless steel

POWER SUPPLY UNIT not included, see p. 349 and 844

WIRING series

MOUNTING recessed (ceiling, wall, ground)

ACCESSORIES see p. 348

PHOTOMETRIC DATA see p. 737

2.5W 24Vdc
CB1B000 ■ ■ T I - ■ Micro-blasted stainless steel

3.5W 24Vdc
CB1B010 ■ ■ T I - ■ Micro-blasted stainless steel

LED COLOUR
F - 2700K
5 - 3000K
9 - 4000K
1 - blue

BEAMS
R1 - 1x60°
R2 - 2x60°
R3 - 3x60°
R4 - 4x60°
R5 - 1x120°
R6 - 1x180°

POWER CABLES
includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm
1 - 5 m
2 - 10 m
3 - 15 m
4 - 20 m

OPTICS radial

LUMEN OUTPUT AT SOURCE 220 lm (3000K, 3.5W)

DELIVERED LUMEN OUTPUT 56 lm (3000K, 4x60°, 3.5W)

NO. AND TYPE OF LED
1 power LED
1/4 ANSI BIN (white LED colour)
50000h L90 B10 (Ta 25°C)

MATERIAL body and trim in AISI 316L stainless steel


POWER SUPPLY UNIT not included, see p. 349

WIRING parallel

MOUNTING recessed (ceiling, wall, ground)

ACCESSORIES see p. 348

PHOTOMETRIC DATA see p. 737

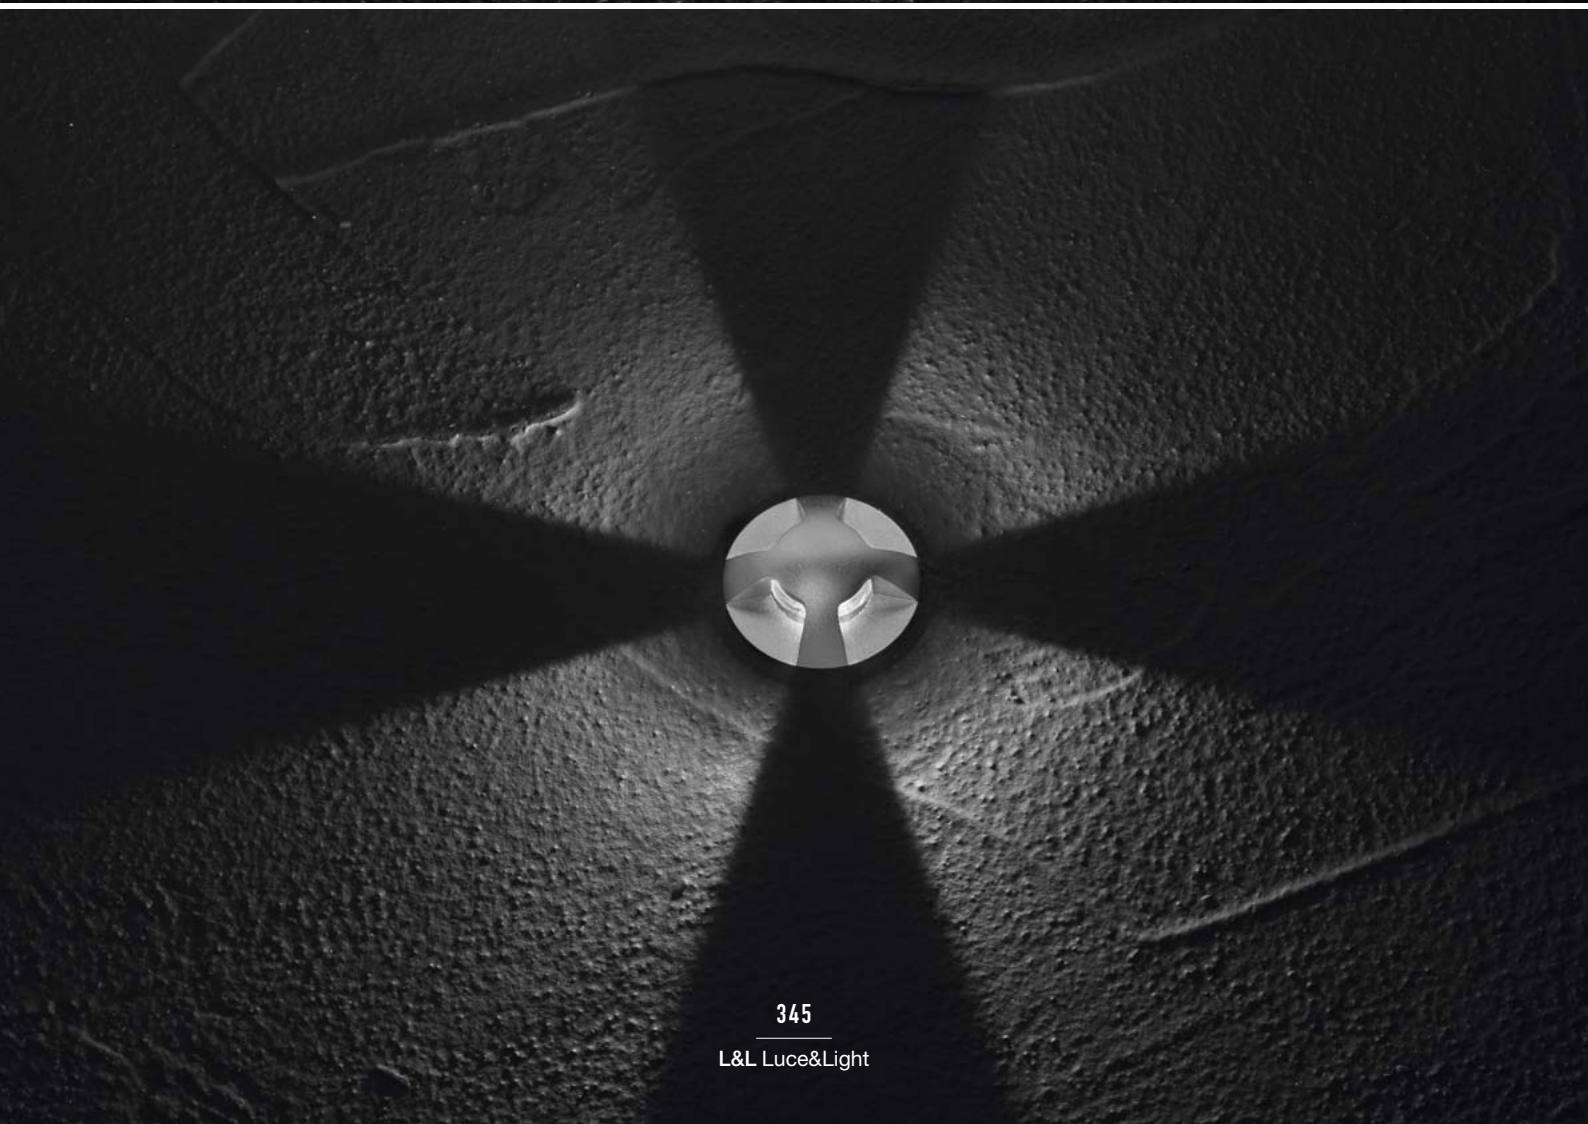




BRIGHT 4 / 9



BRIGHT 4.7




Required outer casing, not included



POWER / POWER SUPPLY CODE	2W 24Vdc CB47000 ■ R I - ■
■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K 1 - blue
■ POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m
OPTICS	radial
LUMEN OUTPUT AT SOURCE	96 lm (3000K)
DELIVERED LUMEN OUTPUT	70 lm (3000K)
NO. AND TYPE OF LED	24 side-emitting LEDs 3-step MacAdam (white LED colour) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminium trim in AISI 316L stainless steel screen in PMMA
POWER SUPPLY UNIT	not included, see p. 349
MOUNTING	recessed (ground)
ACCESSORIES	see p. 348
NOTES	not suitable for use in swimming pools or fountains underwater fixtures p. 682 tamper-resistant kit available on request
PHOTOMETRIC DATA	see p. 737



BRIGHT 9.7

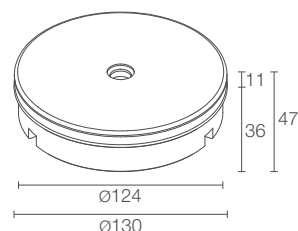

Required outer casing, not included



POWER / POWER SUPPLY CODE	4W 24Vdc CB97000 ■ R I - ■
■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K 1 - blue
■ POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m
OPTICS	radial
LUMEN OUTPUT AT SOURCE	192 lm (3000K)
DELIVERED LUMEN OUTPUT	164 lm (3000K)
NO. AND TYPE OF LED	48 side-emitting LEDs 3-step MacAdam (white LED colour) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminium trim in AISI 316L stainless steel screen in PMMA
POWER SUPPLY UNIT	not included, see p. 349
MOUNTING	recessed (ground)
ACCESSORIES	see p. 348
NOTES	tamper-resistant kit available on request
PHOTOMETRIC DATA	see p. 737

< **BRIGHT 9.7**
customized version
5000K, 9W

Project by / Dunsy Gindi
Light planning by / Ailon Gavish Studio Twilight
Photo by / Omri Amsalem
Villa, Caesarea, Israel

BRIGHT

ACCESSORIES AND POWER SUPPLY UNITS

ACCESSORIES FOR INSTALLATION



WC0202
Outer casing for solid walls
(Bright 1.A / 1.B)



WC0100
Outer casing
(Bright 4.7)



WC0103
Outer casing
(Bright 4.7)



WC0150
Outer casing
(Bright 4.7)



WC0501
Outer casing
(Bright 9.7)



WC0601
Outer casing
(Bright 9.7)



WC0701
Outer casing
(Bright 9.7)

POWER CABLES

the choice of power cable is included in the configuration of the code for the lighting fixture

- 1 length 5 m
- 2 length 10 m
- 3 length 15 m
- 4 length 20 m

Neoprene cables
H05RN-F 2x0.35/0.75 Ø6.3 mm IPS

Neoprene cables
H05RN-F 2x0.75/0.75 Ø6.3 mm IPS

POWER SUPPLY UNITS Bright 1.A**350mA**

Max no. fixtures	PSU	IP	Page
1/3	A13350VL	20	845
1/15	ACUNI020T1	20	844 845
3/9	A19350QL	20	845
5/12	A312350QL	20	845
1/12 dimmer	ADUNITC	20	848 849 850
2/6	A16350IP67	67	845
5/12	A312350IP67	67	845

500mA

Max no. fixtures	PSU	IP	Page
1/3	A13500TC	20	845
1/10	ACUNI020T1	20	844 845
2/5	A15500QL	20	845
5/10	A310500QL	20	845
1/12 dimmer	ADUNITC	20	848 849 850
1/4	A14500IP67	67	845
5/10	A310500IP67	67	845

700mA

Max no. fixtures	PSU	IP	Page
1/3	A13700QL	20	845
1/7 dimmer	ADUNITC	20	848 849 850
1/7	ACUNI020T1	20	844 845
1/3	A13700IP67	67	845
1/9	A39700IP67	67	845

POWER SUPPLY UNITS Bright 1.B / 4.7 / 9.7


Max no. fixtures	PSU	IP	Page
1...n	24Vdc	20	847
1...n	24Vdc	67	847




BRIGHT

OUTDOOR STEP LIGHTS


BRIGHT 1.A 1.B

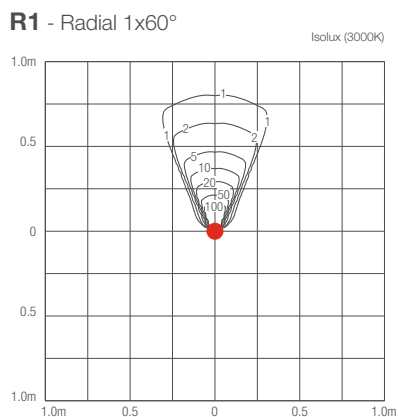

Bright 1.A **2W**
Bright 1.B **3.5W**

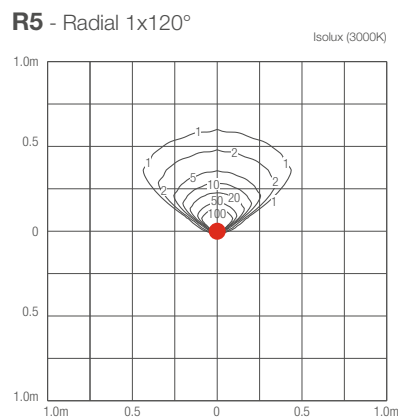


Bright 1.A **2W**
Bright 1.B **3.5W**

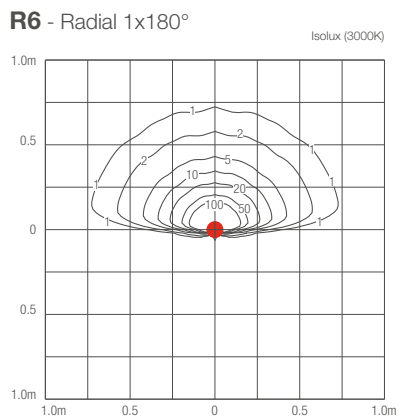

Bright 1.A **2W**
Bright 1.B **3.5W**

BRIGHT 4.7

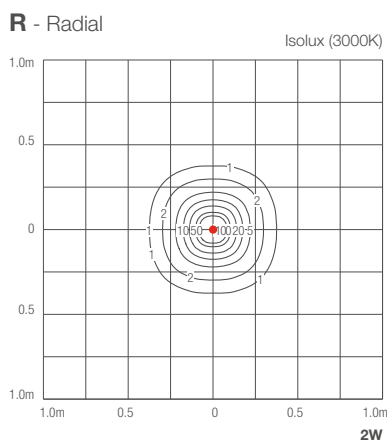

BRIGHT 9.7

