




# LED OPTICAL FIBRES

## INDOOR RECESSED STARRY SKY

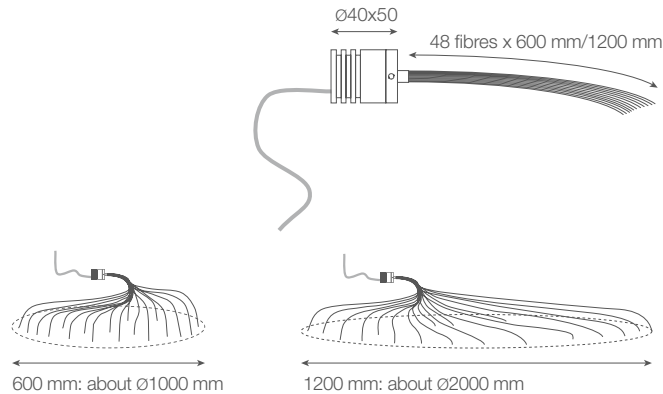

### LED OPTICAL FIBRES

Ø 130 mm  
H 90 mm

Ø 1 mm x 48



#### POWER / POWER SUPPLY CODE

max 3W max 700mA blue/white light 600 mm  
**FB1013** ■ **06EA**

max 3W max 700mA blue/white light 1200 mm  
**FB1013** ■ **12EA**

max 3W max 350mA RGB light 600 mm  
**FB1011 6 06A**

max 3W max 350mA RGB light 1200 mm  
**FB1011 6 12A**

#### LED COLOUR

**F** - 2700K  
**5** - 3000K  
**9** - 4000K  
**0** - 5000K  
**1** - blue

#### OPTICS

points of light

LUMEN OUTPUT AT SOURCE	186 lm (3000K, 700mA) RGB: 56 lm, R: 21 lm G: 26 lm B: 9 lm (350mA)
DELIVERED LUMEN OUTPUT	107 lm (3000K, 700mA) RGB: 40 lm, R: 15 lm G: 19 lm B: 6 lm (350mA)
NO. AND TYPE OF LED	1 power LED, 1/4 ANSI BIN (blue/white LED colour) RGB: 1 full-colour LED 50000h L90 B10 (Ta 25°C)
MATERIAL	anodized aluminium, optical fibres
POWER SUPPLY UNIT	not included, see p. 904 and 917
POWER CABLES	includes 1.5 m PVC cable FROR 2x0.50 Ø5.0 mm RGB: includes 1.5 m PVC cable FROR 6x0.25 Ø5.0 mm
WIRING	series
MOUNTING	recessed (ceiling, wall)
ACCESSORIES	<b>WF0100</b> PVC cable FROR 2x0.50 Ø5.0 mm your choice of length (white LED colour) <b>WF0210</b> PVC cable FROR 6x0.25 Ø5.0 mm your choice of length (RGB) order together with the lighting fixture
NOTES	available on request with optical fibres in non-standard lengths