




BITPOP C

INDOOR CEILING MOUNTED
FOR OFFICES AND WORK SPACES



1 OPTICS



4 OPTICS IN A SQUARE



4 OPTICS IN A LINE



BITPOP C 1.0 p. 614
6.5W 24Vdc
ON/OFF



BITPOP C 2.2 p. 615
18W 230Vac
DALI, 1-10V, ON/OFF





BITPOP C 4.1 p. 615
18W 230Vac
DALI, 1-10V, ON/OFF

BITPOP C

✓
BITPOP C 4.1
 3000K, 18W, 42°, white




BITPOP C 1.0





POWER / POWER SUPPLY CODE	6.5W 24Vdc BC1000 ■ ■ B 0 White - Black BC1000 ■ ■ N 0 Black - Black								
LED COLOUR	1F - 2700K CRI >90 15 - 3000K CRI >90 09 - 4000K CRI 80								
OPTICS	S - 17° F - 30° L - 42° W - 17°x45°								
CONTROL SYSTEM									
LUMEN OUTPUT AT SOURCE	480 lm (3000K)								
DELIVERED LUMEN OUTPUT	335 lm (3000K, 30°)								
NO. AND TYPE OF LED	1 high-intensity power LED 3-step MacAdam, 50000h L85 B10 (Ta 25°C)								
MATERIAL	body in aluminium trim in steel								
POWER SUPPLY UNIT	not included								
	<table border="1"> <thead> <tr> <th>Max no. fixtures</th> <th>PSU</th> <th>IP</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td>1...n</td> <td>24Vdc</td> <td>20</td> <td>847</td> </tr> </tbody> </table>	Max no. fixtures	PSU	IP	Page	1...n	24Vdc	20	847
Max no. fixtures	PSU	IP	Page						
1...n	24Vdc	20	847						
POWER CABLES	includes 1.5 m PVC cable FROR 2x0.35 Ø3.5 mm								
MOUNTING	surface mounted (ceiling)								
FEATURES	UGR < 10 for the 17° and 30° optics								
NOTES	recessed version: Bitpop 1.0, p. 474								
PHOTOMETRIC DATA	see p. 728								



BITPOP C 2.2



BITPOP C 4.1



17°x45° optics

CE LED kWh kg 0.70 IP40
A A+ A++

18W 230Vac
BC2210 **B** White - Black
BC2210 **N** Black - Black

1F - 2700K CRI >90
15 - 3000K CRI >90
09 - 4000K CRI 80

S - 17°
F - 30°
L - 42°
W - 17°x45°

0 - on/off
R - 1-10V + PUSH
D - DALI

1400 lm (3000K)

992 lm (3000K, 30°)

4 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in aluminium
trim in steel

included and wired

includes 0.30 m cable

surface mounted (ceiling)

UGR < 10 for the 17° and 30° optics

recessed version: Bitpop 2.2, p. 475

see p. 728

CE LED kWh kg 0.70 IP40
A A+ A++

18W 230Vac
BC4110 **B** White - Black
BC4110 **N** Black - Black

1F - 2700K CRI >90
15 - 3000K CRI >90
09 - 4000K CRI 80

S - 17°
F - 30°
L - 42°
W - 17°x45°

0 - on/off
R - 1-10V
D - DALI + PUSH

1400 lm (3000K)

992 lm (3000K, 30°)

4 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in aluminium
trim in steel

included and wired

includes 0.30 m cable

surface mounted (ceiling)

UGR < 10 for the 17° and 30° optics

recessed version: Bitpop 4.1, p. 476


see p. 728

BITPOP C


INDOOR CEILING MOUNTED

BITPOP C 1.0


S - 17°

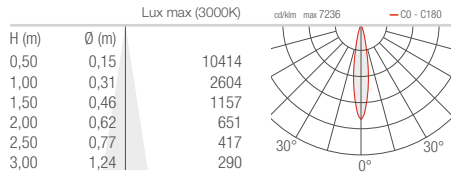


F - 30°

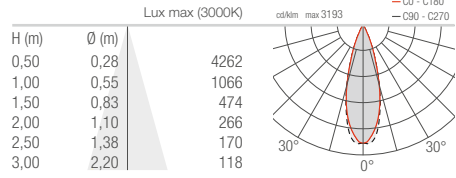

L - 42°

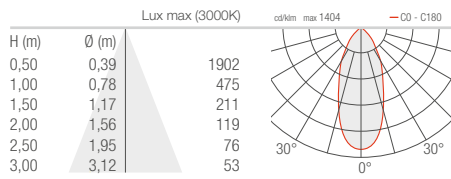


W - 17°x45°

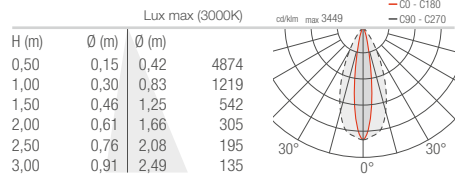


BITPOP C 2.2 4.1


S - 17°

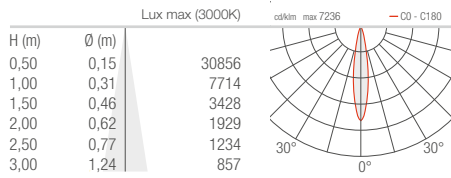

F - 30°

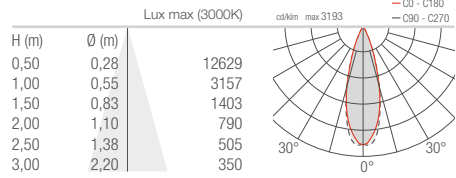

L - 42°

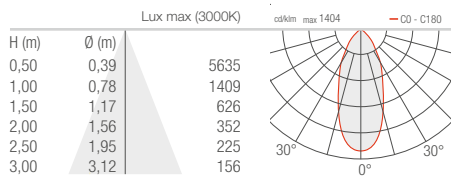

W - 17°x45°

