



CUBE C

OUTDOOR CEILING MOUNTED, OPTICS WITH WHITE AND RGB LIGHT







CUBE C 1.2



CUBE C 1.3



POWER / POWER SUPPLY CODE

max 6W max 500mA blue/white light
CU1232 ■ ■ ■ E White
CU1232 ■ ■ ■ H Anthracite
CU1232 ■ ■ ■ T Cor-ten

max 3W max 350mA RGB light
CU1231 6 ■ ■ ■ E White
CU1231 6 ■ ■ ■ H Anthracite
CU1231 6 ■ ■ ■ T Cor-ten

max 6W max 500mA blue/white light
CU1332 ■ ■ ■ E White
CU1332 ■ ■ ■ H Anthracite
CU1332 ■ ■ ■ T Cor-ten

max 3W max 350mA RGB light
CU1331 6 ■ ■ ■ E White
CU1331 6 ■ ■ ■ H Anthracite
CU1331 6 ■ ■ ■ T Cor-ten

■ LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
■ OPTICS	S - 18° M - 28° L - 36°

■	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
■	S - 18° tilted 20° M - 28° tilted 20° L - 36° tilted 20°

LUMEN OUTPUT AT SOURCE	410 lm (3000K, 500mA) RGB: 197 lm, R: 62 lm G: 100 lm B: 35 lm (350mA)
------------------------	--

LUMEN OUTPUT AT SOURCE	410 lm (3000K, 500mA) RGB: 197 lm, R: 62 lm G: 100 lm B: 35 lm (350mA)
------------------------	--

DELIVERED LUMEN OUTPUT	337 lm (3000K, 500mA, 28°) RGB: 163 lm, R: 51 lm G: 83 lm B: 29 lm (350mA, 28°)
------------------------	---

DELIVERED LUMEN OUTPUT	295 lm (3000K, 500mA, 28°) RGB: 141 lm, R: 44 lm G: 72 lm B: 25 lm (350mA, 28°)
------------------------	---

NO. AND TYPE OF LED	3 power LEDs 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C)
---------------------	---

NO. AND TYPE OF LED	3 power LEDs 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C)
---------------------	---

MATERIAL	body in anodized aluminium screen in frosted plexiglass
----------	--

MATERIAL	body in anodized aluminium screen in frosted plexiglass
----------	--

POWER SUPPLY UNIT	not included, see p. 314 and 844
-------------------	----------------------------------

POWER SUPPLY UNIT	not included, see p. 314 and 844
-------------------	----------------------------------

POWER CABLES	includes 2x0.30 m single-core cables
--------------	--------------------------------------

POWER CABLES	includes 2x0.30 m single-core cables
--------------	--------------------------------------

WIRING	series
--------	--------

WIRING	series
--------	--------

MOUNTING	surface mounted (ceiling)
----------	---------------------------

MOUNTING	surface mounted (ceiling)
----------	---------------------------

NOTES	wall-mounted version: Cube W 1.0, p. 299
-------	--

NOTES	wall-mounted version: Cube W 1.1, p. 299
-------	--

PHOTOMETRIC DATA	see p. 753
------------------	------------

PHOTOMETRIC DATA	see p. 753
------------------	------------

CUBE C

POWER SUPPLY UNITS


POWER SUPPLY UNITS

350mA

Max no. fixtures	PSU	IP	Page
1	A13350VL	20	845
1/3	A19350QL	20	845
1/5	ACUNI020T1	20	844 845
2/4	A312350QL	20	845
1/4 dimmer	ADUNITC	20	848 849 850
1/2	A16350IP67	67	845
2/4	A312350IP67	67	845
-	RGB controller	-	855 - 860

500mA

Max no. fixtures	PSU	IP	Page
1	A13500TC	20	845
1/3	ACUNI020T1	20	844 845
2/3	A310500QL	20	845
1/4 dimmer	ADUNITC	20	848 849 850
1	A14500IP67	67	845
2/3	A310500IP67	67	845

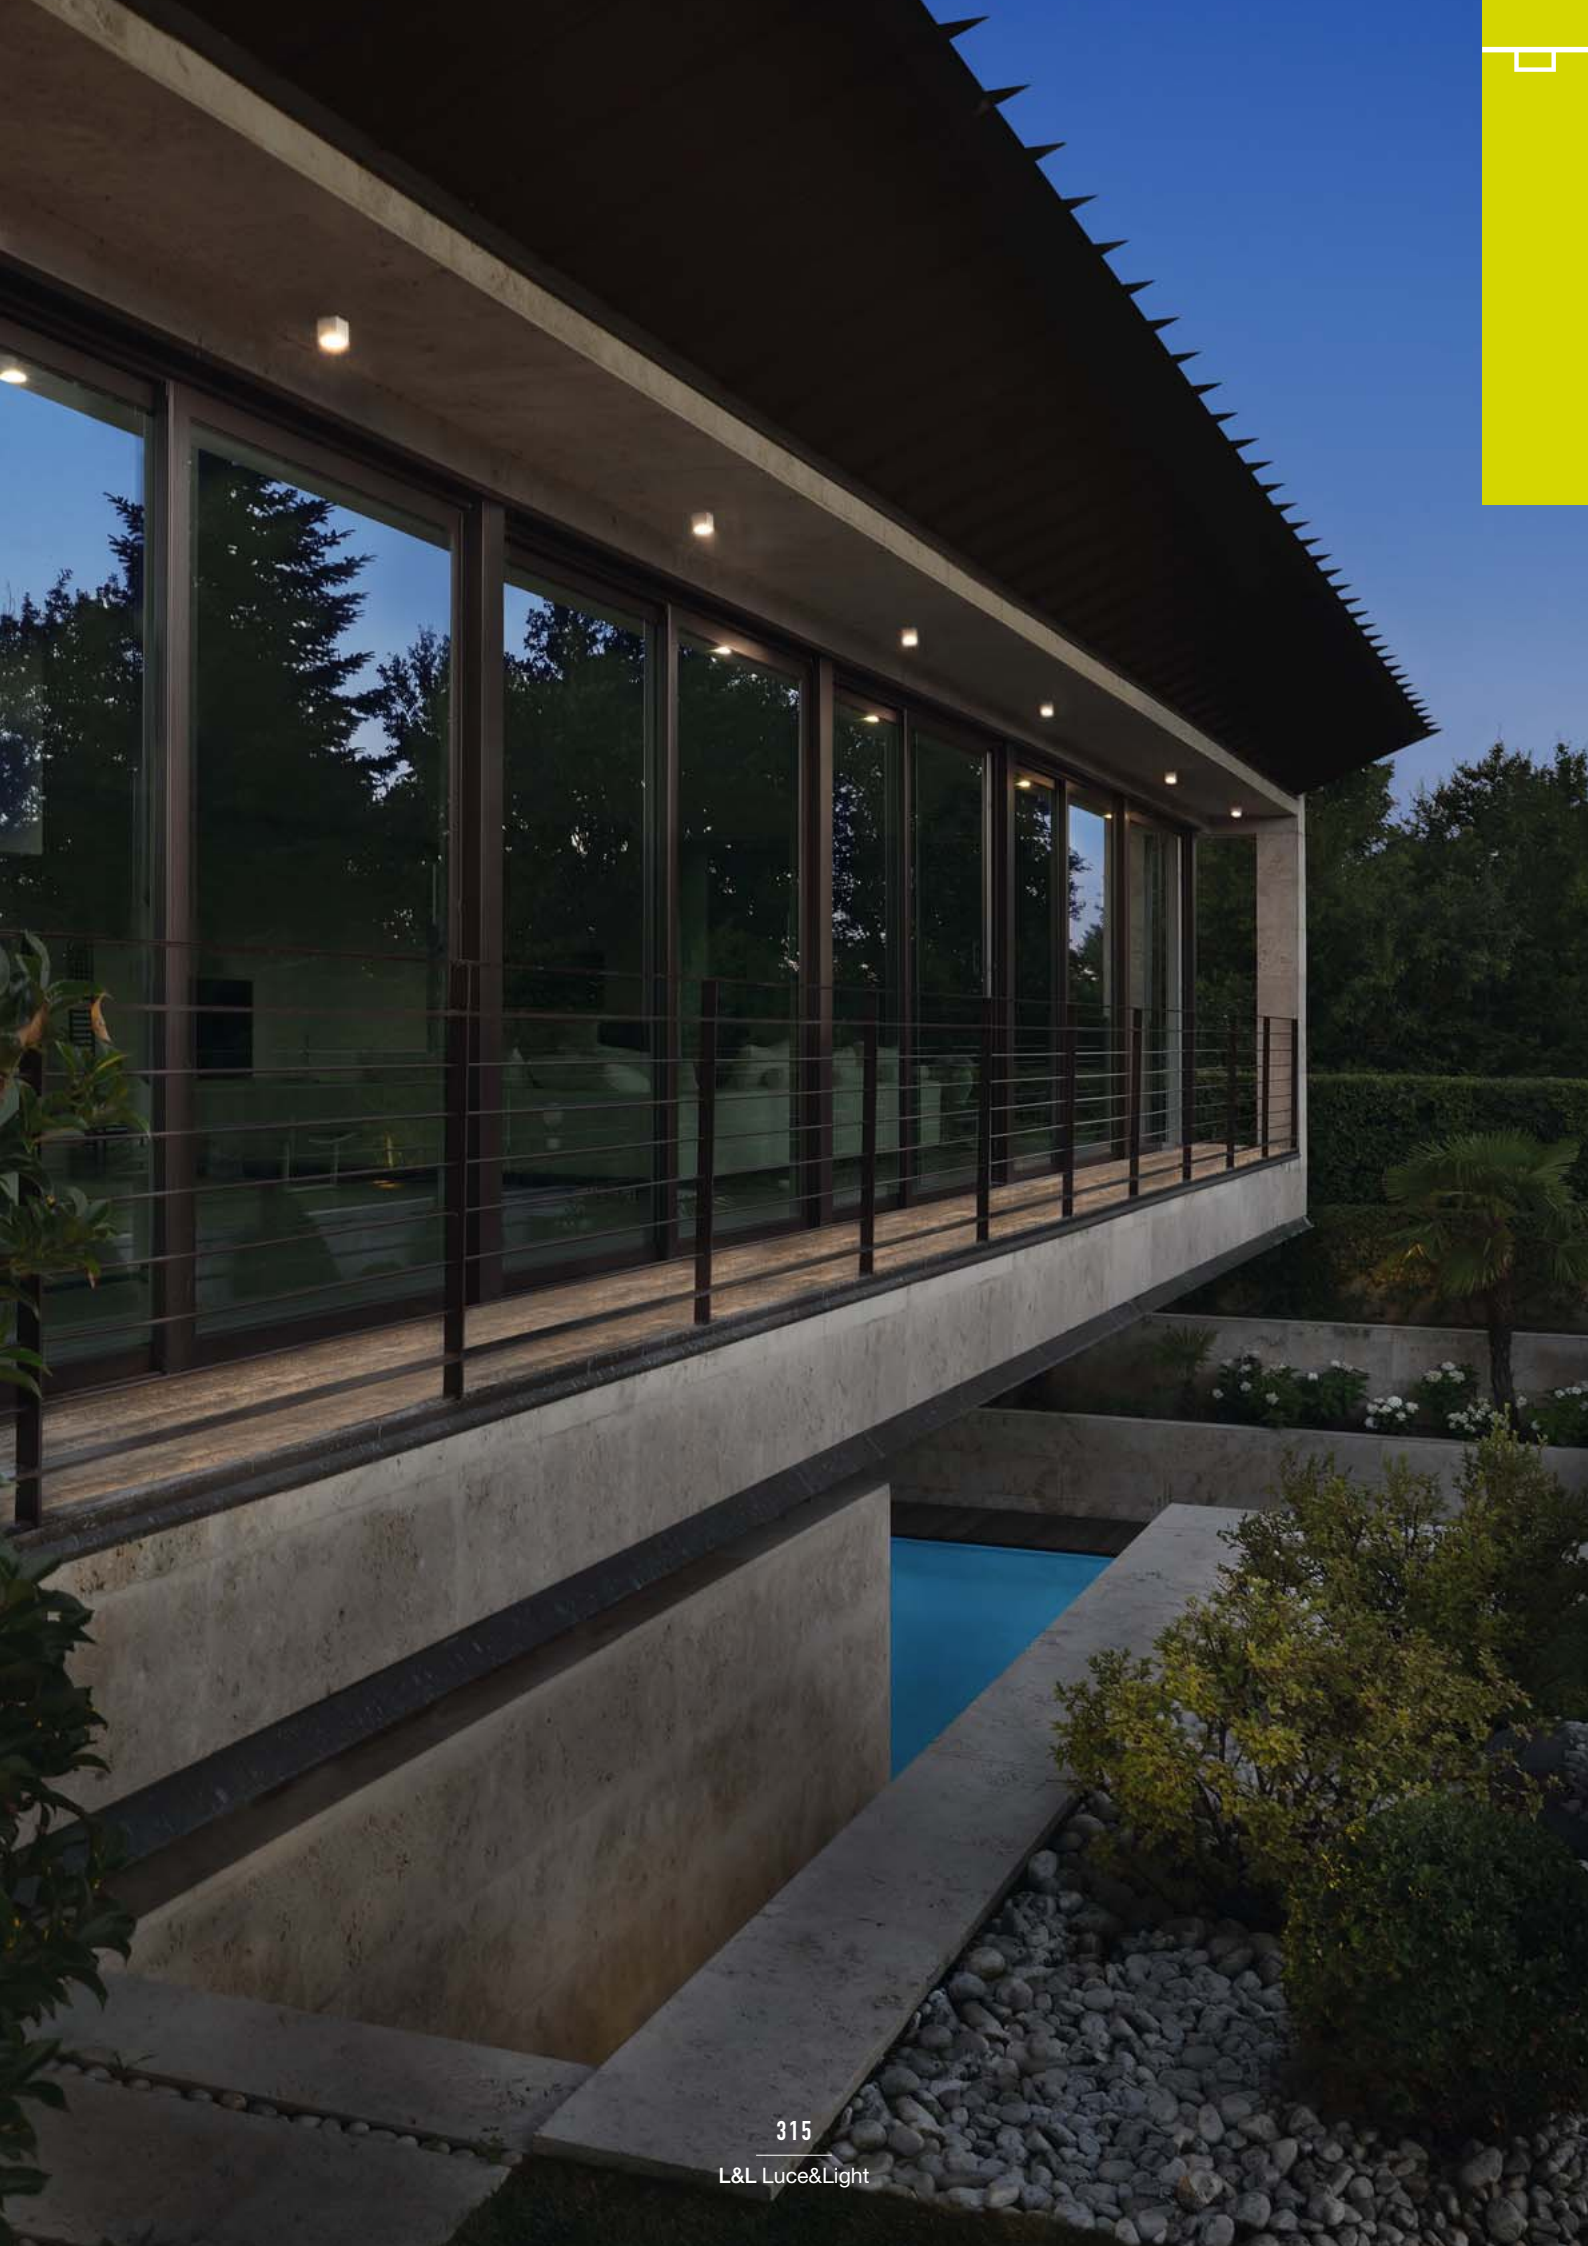




CUBE C


OUTDOOR CEILING MOUNTED

CUBE C 1.2


S - 18°

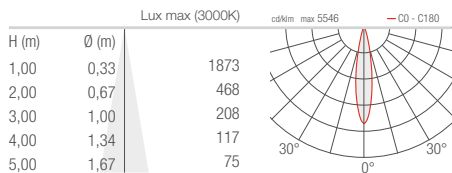

M - 28°

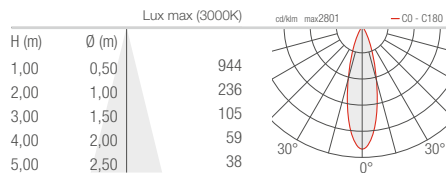


L - 36°

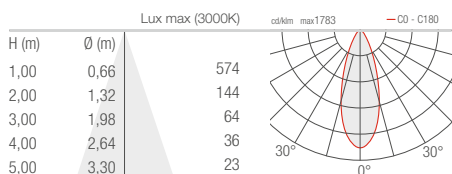


CUBE C 1.3

S - 18° tilted 20°

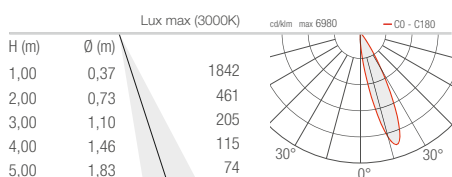

M - 28° tilted 20°

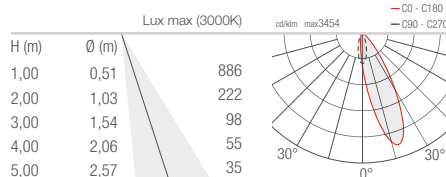

L - 36° tilted 20°

