



ELLA OUT

OUTDOOR WALL MOUNTED
SINGLE BEAM, DIFFUSE LIGHT



diffuse



2700K 3000K 4000K

OUTDOOR

INDOOR

WALL MOUNTED



ELLA OUT 1.0 p. 280
7W 230Vac
493 lm (3000K)



ELLA OUT 2.0 p. 281
13W 230Vac
985 lm (3000K)



ELLA OUT 3.0 p. 281
19W 230Vac
1478 lm (3000K)

ELLA IN p. 594

CEILING MOUNTED

ELLO OUT p. 306



ELLO IN p. 620

ELLA OUT

∨
ELLA OUT 1.0
without spacer



ELLA OUT 1.0

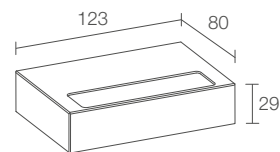


^
ELLA OUT 1.0
with spacer (15° inclination)

POWER / POWER SUPPLY CODE	7W 230Vac EA1010 DET White EA1010 DFT Grey EA1010 DHT Anthracite EA1010 DTT Cor-ten
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	954 lm (3000K)
DELIVERED LUMEN OUTPUT	493 lm (3000K)
NO. AND TYPE OF LED	18 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in aluminium screen in serigraphed extra-clear microprismatic glass
POWER SUPPLY UNIT	built in
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm
MOUNTING	surface mounted (wall)
ACCESSORIES	see p. 282
NOTES	indoor version: Ella IN 1.0, p. 596 ceiling-mounted version: Ello OUT 1.0, p. 308
PHOTOMETRIC DATA	see p. 758



ELLA OUT 2.0

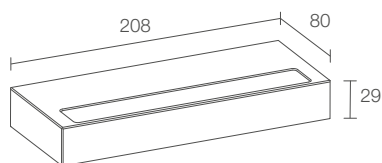

13W 230Vac
EA2010 **D E T** White
EA2010 **D F T** Grey
EA2010 **D H T** Anthracite
EA2010 **D T T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

diffuse

1908 lm (3000K)

985 lm (3000K)

36 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium
 screen in serigraphed extra-clear
 microprismatic glass

built in

includes 1.5 m neoprene cable
 H05RN-F 3x1.00 Ø7.0 mm

surface mounted (wall)



see p. 282

indoor version: Ella IN 2.0, p. 597
 ceiling-mounted version: Ello OUT 2.0, p. 309

see p. 758



ELLA OUT 3.0

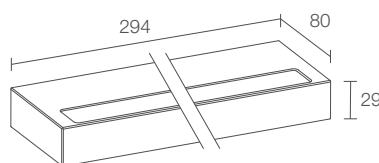

19W 230Vac
EA3010 **D E T** White
EA3010 **D F T** Grey
EA3010 **D H T** Anthracite
EA3010 **D T T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K

diffuse

2862 lm (3000K)

1478 lm (3000K)

54 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium
 screen in serigraphed extra-clear
 microprismatic glass

built in

includes 1.5 m neoprene cable
 H05RN-F 3x1.00 Ø7.0 mm

surface mounted (wall)

see p. 282


indoor version: Ella IN 3.0, p. 597
 ceiling-mounted version: Ello OUT 3.0, p. 309

see p. 758


ELLA OUT

ACCESSORIES


ACCESSORIES FOR INSTALLATION

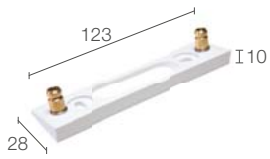

WD0651E - White
WD0651F - Grey
WD0651H - Anthracite
WD0651T - Cor-ten
Spacer for 15° inclination
RAL finish available on request
(Ella OUT 1.0)

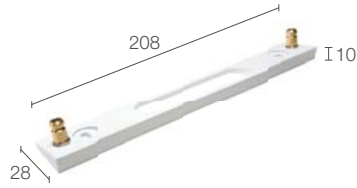

WD0652E - White
WD0652F - Grey
WD0652H - Anthracite
WD0652T - Cor-ten
Spacer for 15° inclination
RAL finish available on request
(Ella OUT 2.0)

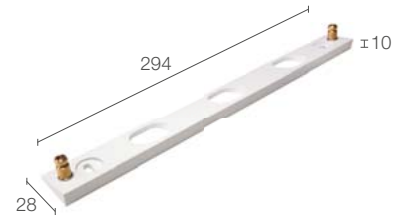

WD0653E - White
WD0653F - Grey
WD0653H - Anthracite
WD0653T - Cor-ten
Spacer for 15° inclination
RAL finish available on request
(Ella OUT 3.0)

STANDARD FINISHES



White



Grey



Anthracite



Cor-ten




ELLA OUT

OUTDOOR WALL MOUNTED


ELLA OUT 1.0

D - Diffuse

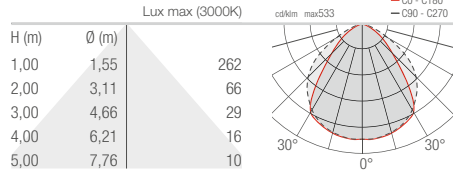

ELLA OUT 2.0

D - Diffuse

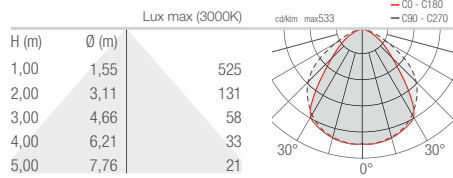

ELLA OUT 3.0

D - Diffuse

