



# ELLO OUT

OUTDOOR CEILING MOUNTED  
WITH DIFFUSE LIGHT




diffuse

2700K 3000K 4000K

OUTDOOR

INDOOR

CEILING MOUNTED



**ELLO OUT 1.0** p. 308  
7W 230Vac  
493 lm (3000K)



**ELLO OUT 2.0** p. 309  
13W 230Vac  
985 lm (3000K)



**ELLO OUT 3.0** p. 309  
19W 230Vac  
1478 lm (3000K)

**ELLO IN** p. 620

WALL MOUNTED



**ELLA OUT** p. 278

**ELLA IN** p. 594

# ELLO OUT




## ELLO OUT 1.0

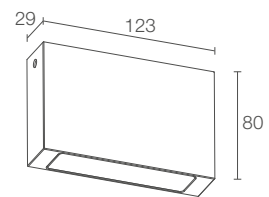

<b>POWER / POWER SUPPLY CODE</b>	7W 230Vac <b>EP1010</b> <b>D E T</b> White <b>EP1010</b> <b>D F T</b> Grey <b>EP1010</b> <b>D H T</b> Anthracite <b>EP1010</b> <b>D T T</b> Cor-ten
<b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	954 lm (3000K)
<b>DELIVERED LUMEN OUTPUT</b>	493 lm (3000K)
<b>NO. AND TYPE OF LED</b>	18 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in aluminium screen in serigraphed extra-clear microprismatic glass
<b>POWER SUPPLY UNIT</b>	built in
<b>POWER CABLES</b>	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm
<b>MOUNTING</b>	surface mounted (ceiling)
<b>ACCESSORIES</b>	see p. 310
<b>NOTES</b>	indoor version: Ello IN 1.0, p. 622 wall-mounted version: Ella OUT 1.0, p. 280
<b>PHOTOMETRIC DATA</b>	see p. 759



ELLO OUT 2.0

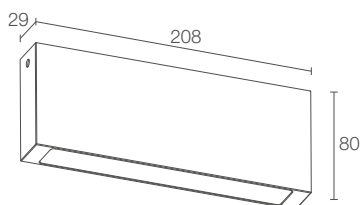

CE LED TECH kg 0.80 IP65 IK08  
A A+ A++

13W 230Vac  
**EP2010** **D E T** White  
**EP2010** **D F T** Grey  
**EP2010** **D H T** Anthracite  
**EP2010** **D T T** Cor-ten

■ **F** - 2700K  
**5** - 3000K  
**9** - 4000K

diffuse

1908 lm (3000K)

985 lm (3000K)

36 mid-power LEDs  
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium  
 screen in serigraphed extra-clear microprismatic glass

built in

includes 1.5 m neoprene cable  
 H05RN-F 3x1.00 Ø7.0 mm

surface mounted (ceiling)


see p. 310

indoor version: Ello IN 2.0, p. 623  
 wall-mounted version: Ella OUT 2.0, p. 281

see p. 759



ELLO OUT 3.0

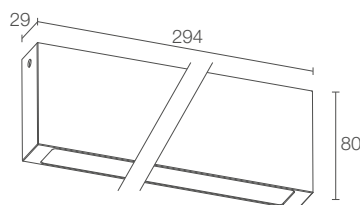

CE LED TECH kg 1.20 IP65 IK08  
A A+ A++

19W 230Vac  
**EP3010** **D E T** White  
**EP3010** **D F T** Grey  
**EP3010** **D H T** Anthracite  
**EP3010** **D T T** Cor-ten

■ **F** - 2700K  
**5** - 3000K  
**9** - 4000K

diffuse

2862 lm (3000K)

1478 lm (3000K)

54 mid-power LEDs  
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium  
 screen in serigraphed extra-clear microprismatic glass

built in

includes 1.5 m neoprene cable  
 H05RN-F 3x1.00 Ø7.0 mm

surface mounted (ceiling)

see p. 310


indoor version: Ello IN 3.0, p. 623  
 wall-mounted version: Ella OUT 3.0, p. 281

see p. 759


# ELLO OUT

## ACCESSORIES


### ACCESSORIES FOR INSTALLATION

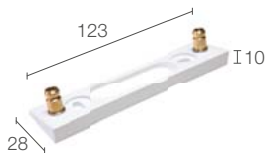

**WD0651E** - White  
**WD0651F** - Grey  
**WD0651H** - Anthracite  
**WD0651T** - Cor-ten  
Spacer for 15° inclination  
RAL finish available on request  
(Ello OUT 1.0)

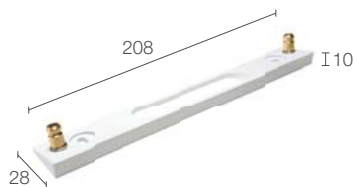

**WD0652E** - White  
**WD0652F** - Grey  
**WD0652H** - Anthracite  
**WD0652T** - Cor-ten  
Spacer for 15° inclination  
RAL finish available on request  
(Ello OUT 2.0)

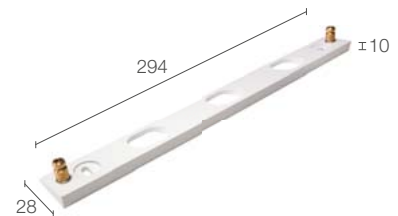

**WD0653E** - White  
**WD0653F** - Grey  
**WD0653H** - Anthracite  
**WD0653T** - Cor-ten  
Spacer for 15° inclination  
RAL finish available on request  
(Ello OUT 3.0)

∨  
**ELLO OUT 1.0**  
with spacer (15° inclination)



### STANDARD FINISHES



White



Grey



Anthracite



Cor-ten






# ELLO OUT

## OUTDOOR CEILING MOUNTED


### ELLO OUT 1.0

D - Diffuse

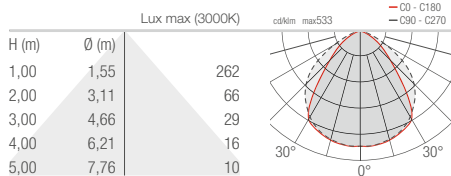

### ELLO OUT 2.0

D - Diffuse

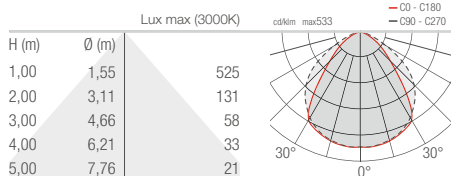

### ELLO OUT 3.0

D - Diffuse

