




LIRA



OUTDOOR STEP LIGHTS
LIGHTING FOR PATHS AND STEPS



LIRA 1.0

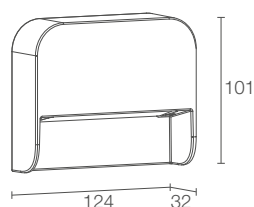

LIRA 2.0

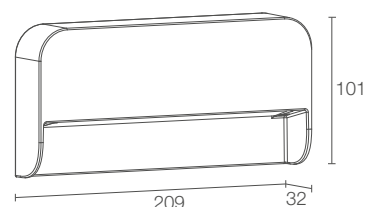

POWER / POWER SUPPLY CODE	6W 230Vac LR1010 A E White LR1010 A F Grey LR1010 A H Anthracite LR1010 A T Cor-ten
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	asymmetrical
LUMEN OUTPUT AT SOURCE	756 lm (3000K)
DELIVERED LUMEN OUTPUT	368 lm (3000K, white finish)
NO. AND TYPE OF LED	18 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed extra-clear microprismatic glass
POWER SUPPLY UNIT	built in
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm
MOUNTING	surface mounted (wall)
ACCESSORIES	see p. 376
PHOTOMETRIC DATA	see p. 782

POWER / POWER SUPPLY CODE	12W 230Vac LR2010 A E White LR2010 A F Grey LR2010 A H Anthracite LR2010 A T Cor-ten
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	asymmetrical
LUMEN OUTPUT AT SOURCE	1512 lm (3000K)
DELIVERED LUMEN OUTPUT	736 lm (3000K, white finish)
NO. AND TYPE OF LED	36 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed extra-clear microprismatic glass
POWER SUPPLY UNIT	built in
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm
MOUNTING	surface mounted (wall)
ACCESSORIES	see p. 376
PHOTOMETRIC DATA	see p. 782

LIRA

ACCESSORIES

ACCESSORIES FOR INSTALLATION





WC0301
Optional outer casing

POSITIONING DIAGRAMS



LIRA 1.0

A - Asymmetrical

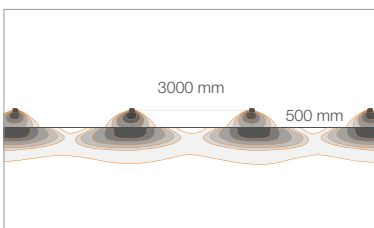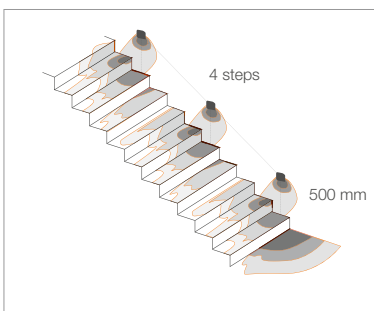

LIRA 2.0

A - Asymmetrical

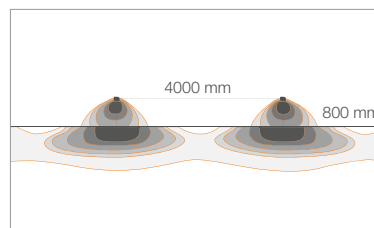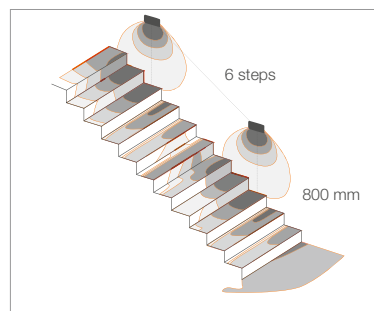




LIRA

OUTDOOR STEP LIGHTS

LIRA 1.0

A - Asymmetrical

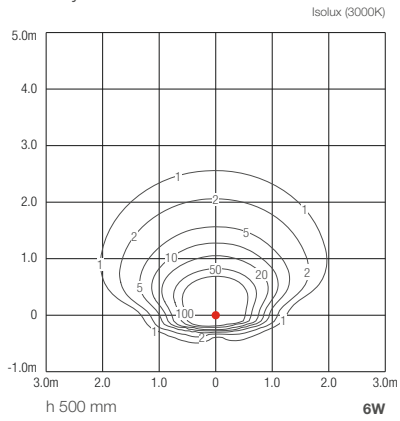

LIRA 2.0

A - Asymmetrical

