




RONDÒ

OUTDOOR STEP LIGHTS
DRIVE-OVER FOR ORIENTATION LIGHTS IN PATHS AND PARKING AREAS



Ø100 mm

Ø160 mm

SINGLE BEAM



RONDÒ 1.1 p. 330
2W 24Vdc



RONDÒ 3.1 p. 332
3W 24Vdc
3W 230Vac



RONDÒ 2.1 p. 331
2W 24Vdc

DOUBLE BEAM




RONDÒ 1.2 p. 331
4W 24Vdc



RONDÒ 3.2 p. 333
5W 24Vdc
5W 230Vac

4 BEAMS



RONDÒ 3.4 p. 333
8W 24Vdc
8W 230Vac



BUILT-IN PROTECTION SYSTEMS:

PID PROTECTIVE IMPEDANCE DEVICE (RONDÒ 3)



IPS INTELLIGENT PROTECTION SYSTEM

CONTROLLED UPWARD BEAM AVOIDS LIGHT POLLUTION

TAMPER-RESISTANT SCREW IN AISI 316L STAINLESS STEEL IN THE SAME FINISH AS THE FIXTURE



5-STEP MATERIAL PROTECTION, AND OXIDATION AND CORROSION RESISTANCE

Preparation for painting with ALODINE NT-E® coating
Epoxy paint
Polyester paint
Paints compliant with Qualicoat automotive coating standard
Salt spray tested (over 1000 hours)



RONDÒ

UNIQUE SELLING POINTS

RAL FINISH
ON REQUEST



DRIVE-OVER
UP TO 5000 KG



BODY IN AISI 316L
STAINLESS STEEL, MADE
ENTIRELY ON A CNC LATHE



SCREEN IN
ANTI-UV
POLYCARBONATE

10° OPTICS



RADIAL OPTICS



DOUBLE-BEAM
RADIAL OPTICS





RONDÒ 1 / 2

✓
RONDÒ 1.2
 3000K, 4W, radial, micro-blasted stainless steel
LIRA 1.0
 3000K, 6W, asymmetrical, anthracite
UPDOWN 3.6
 3000K, 6W, 15°, anodized grey

Project by / arch. Patrik Spreafico
 Plastic Stratosfera, Robbiate, Lecco, Italy





RONDÒ 1.1

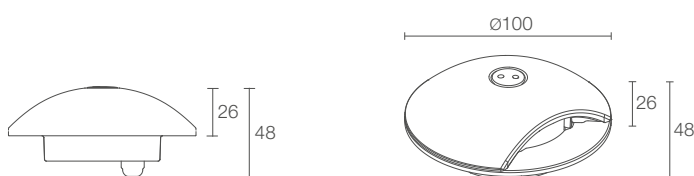

POWER / POWER SUPPLY CODE	2W 24Vdc RD1100 ■ H - Anthracite RD1100 ■ I - Micro-blasted stainless steel RD1100 ■ T - Cor-ten
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 10° A - radial
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m
LUMEN OUTPUT AT SOURCE	185 lm (3000K)
DELIVERED LUMEN OUTPUT	65 lm (3000K, radial optics)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in AISI 316L stainless steel screen in Rilsan® Clear
POWER SUPPLY UNIT	not included, see p. 334
MOUNTING	recessed (ground)
ACCESSORIES	see p. 334
PHOTOMETRIC DATA	see p. 806



RONDÒ 1.2



4W 24Vdc

RD1200 **H** - Anthracite



RD1200 **I** - Micro-blasted stainless steel

RD1200 **T** - Cor-ten

F - 2700K 5 - 3000K 9 - 4000K
S - 10° A - radial
includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m
185 lm (3000K) per beam
65 lm (3000K, radial optics) per beam
2 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
body in AISI 316L stainless steel screen in Riisan® Clear
not included, see p. 334
recessed (ground)
see p. 334
see p. 806



RONDÒ 2.1



2W 24Vdc

RD2100 **H** - Anthracite

RD2100 **I** - Micro-blasted stainless steel

RD2100 **T** - Cor-ten


F - 2700K 5 - 3000K 9 - 4000K
S - 10° A - radial
includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m
185 lm (3000K)
85 lm (3000K, radial optics)
1 power LED 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
body in AISI 316L stainless steel screen in Riisan® Clear
not included, see p. 334
recessed (ground)
see p. 334
see p. 806

RONDÒ 3

✓
RONDÒ 3.4
 3000K, 8W, radial, micro-blasted stainless steel
 Light planning by / Cristian Turra
 Private residence, Iseo, Brescia, Italy



RONDÒ 3.1

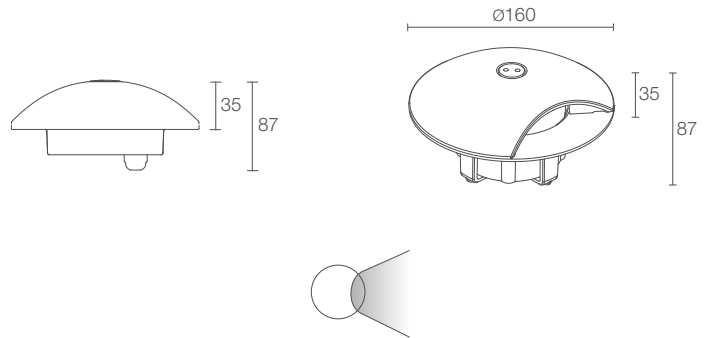

Built-in power supply in version with 230Vac power



POWER / POWER SUPPLY CODE



3W 24Vdc
RD3100 H - Anthracite
RD3100 I - Micro-blasted stainless steel
RD3100 T - Cor-ten

3W 230Vac
RD3110 H Anthracite
RD3110 I Micro-blasted stainless steel
RD3110 T Cor-ten


LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 10° A - radial
POWER CABLES	230Vac: includes 1.5 m neoprene cable H07RN-F 3x1.00 Ø8.7 mm 24Vdc: includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m
LUMEN OUTPUT AT SOURCE	185 lm (3000K)
DELIVERED LUMEN OUTPUT	90 lm (3000K, radial optics)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in AISI 316L stainless steel screen in Rilsan® Clear
POWER SUPPLY UNIT	230Vac: built in 24Vdc: not included, see p. 334
MOUNTING	recessed (ground)
ACCESSORIES	see p. 334
PHOTOMETRIC DATA	see p. 806



RONDÒ 3.2



Built-in power supply in version with 230Vac power



- 5W 24Vdc
RD3200 H - Anthracite
RD3200 I - Micro-blasted stainless steel
RD3200 T - Cor-ten
- 5W 230Vac
RD3210 H - Anthracite
RD3210 I - Micro-blasted stainless steel
RD3210 T - Cor-ten

- F - 2700K
- 5 - 3000K
- 9 - 4000K

- S - 10°
- A - radial

- 230Vac: includes 1.5 m neoprene cable H07RN-F 3x1.00 Ø8.7 mm
- 24Vdc: includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm
- 1 - 5 m
- 2 - 10 m
- 3 - 15 m
- 4 - 20 m

185 lm (3000K) per beam

90 lm (3000K, radial optics) per beam

2 power LEDs
 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)

body in AISI 316L stainless steel
 screen in Rilsan® Clear

230Vac: built in
 24Vdc: not included, see p. 334



recessed (ground)

see p. 334

see p. 806



RONDÒ 3.4



Built-in power supply in version with 230Vac power



- 8W 24Vdc
RD3400 H - Anthracite
RD3400 I - Micro-blasted stainless steel
RD3400 T - Cor-ten
- 8W 230Vac
RD3410 H - Anthracite
RD3410 I - Micro-blasted stainless steel
RD3410 T - Cor-ten

- F - 2700K
- 5 - 3000K
- 9 - 4000K

- S - 10°
- A - radial

- 230Vac: includes 1.5 m neoprene cable H07RN-F 3x1.00 Ø8.7 mm
- 24Vdc: includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm

185 lm (3000K) per beam

90 lm (3000K, radial optics) per beam

4 power LEDs
 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)

body in AISI 316L stainless steel
 screen in Rilsan® Clear

230Vac: built in
 24Vdc: not included, see p. 334

recessed (ground)

see p. 334

see p. 806

RONDÒ

ACCESSORIES AND POWER SUPPLY UNITS

ACCESSORIES FOR INSTALLATION



WC0100
Outer casing
(Rondò 1.1 / 1.2 / 2.1)



WC0103
Outer casing
(Rondò 1.1 / 1.2 / 2.1)



WC0150
Outer casing
(Rondò 1.1 / 1.2 / 2.1)



WC0601
Outer casing
(Rondò 3.1 / 3.2 / 3.4)



WC0701
Outer casing
(Rondò 3.1 / 3.2 / 3.4)

for spare parts, see p. 866

POWER CABLES Rondò 1.1 / 1.2 / 2.1; Rondò 3.1 / 3.2 24Vdc version

the choice of power cable is included in the configuration of the code for the lighting fixture

- 1 length 5 m
- 2 length 10 m
- 3 length 15 m
- 4 length 20 m

Neoprene cables
H05RN-F 2x0.35/0.75 Ø6.3 mm IPS


POWER SUPPLY UNITS Rondò 1.1 / 1.2 / 2.1; Rondò 3.1 / 3.2 / 3.4 24Vdc version

Max no. fixtures	PSU	IP	Page
1...n	24Vdc	20	847
1...n	24Vdc	67	847

RONDÒ 1.2 >

3000K, 4W, radial, micro-blasted stainless steel



Project by / Studio di Architettura Andrea Abbadesse,
ing. Ignazio Stancanelli, ing. Giuseppe Malatino
Light planning by / Light Style
Maniace-Ortigia, Syracuse, Italy

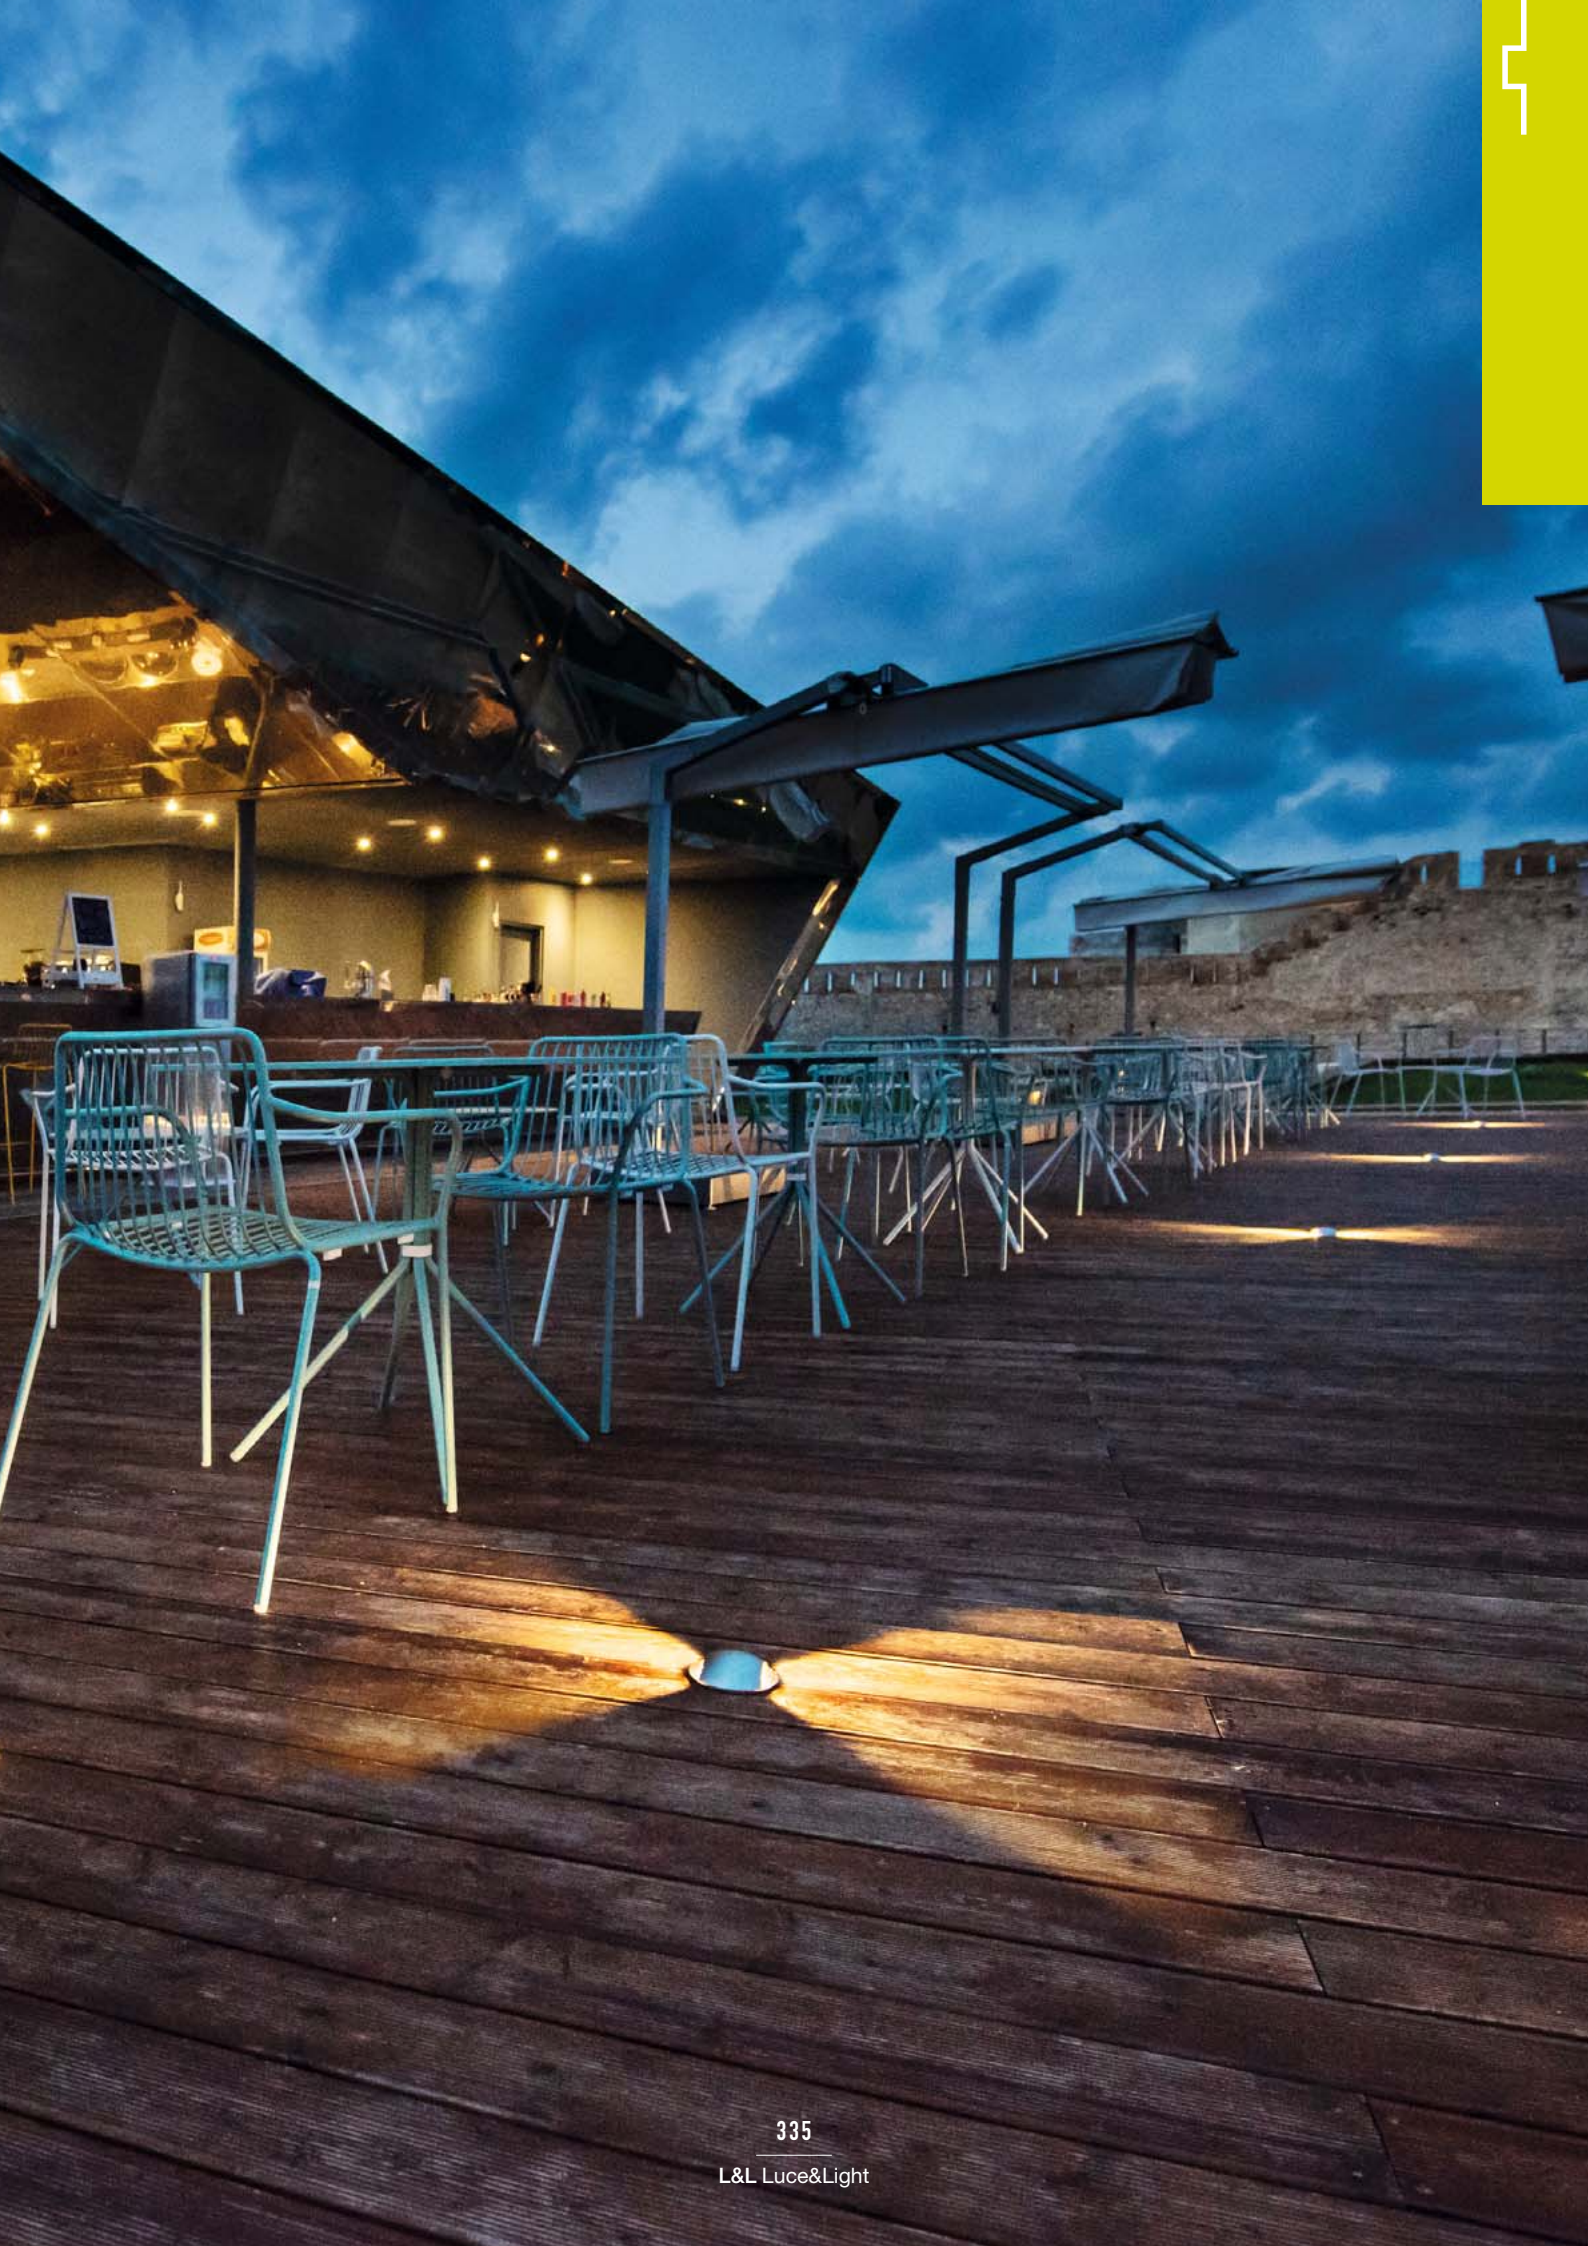



RONDÒ

OUTDOOR STEP LIGHTS

RONDÒ 1.1

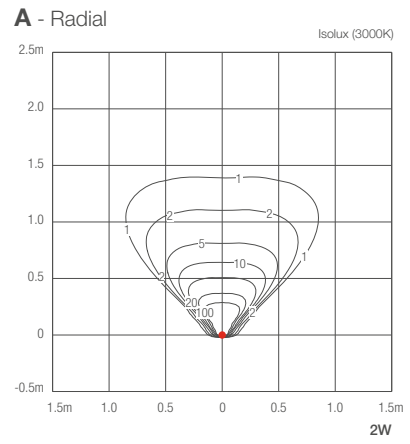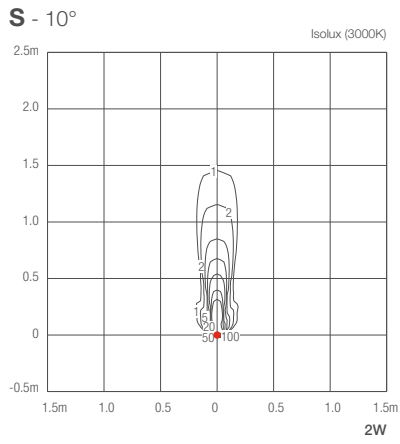

RONDÒ 2.1

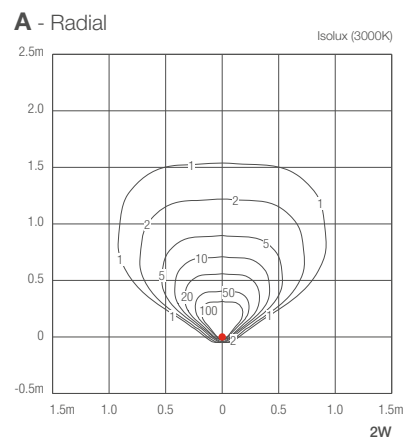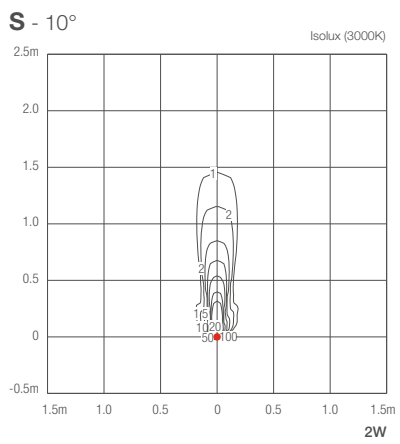

RONDÒ 3.1

