







# SIRI BLVD

URBAN LIGHTING




pedestrian zone   cycle and footpath   asymmetrical

2700K 3000K 4000K



POLE MOUNTED



WALL MOUNTED



**SIRI BLVD 1.0** p. 430  
38W 230Vac  
virtual midnight, ON/OFF



**SIRI BLVD 2.0** p. 431  
38W 230Vac  
virtual midnight, ON/OFF




**SIRI BLVD 3.0** p. 431  
38W 230Vac  
virtual midnight, ON/OFF

< **SIRI BLVD 3.0**  
4000K, 38W, pedestrian-zone optics  
with angled wall bracket



# SIRI BLVD



**SIRI BLVD 1.0**

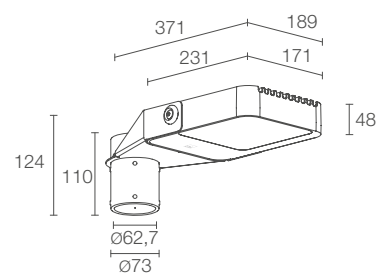

✓  
**SIRI BLVD 3.0**  
 4000K, 38W, pedestrian-zone optics  
 with angled wall bracket

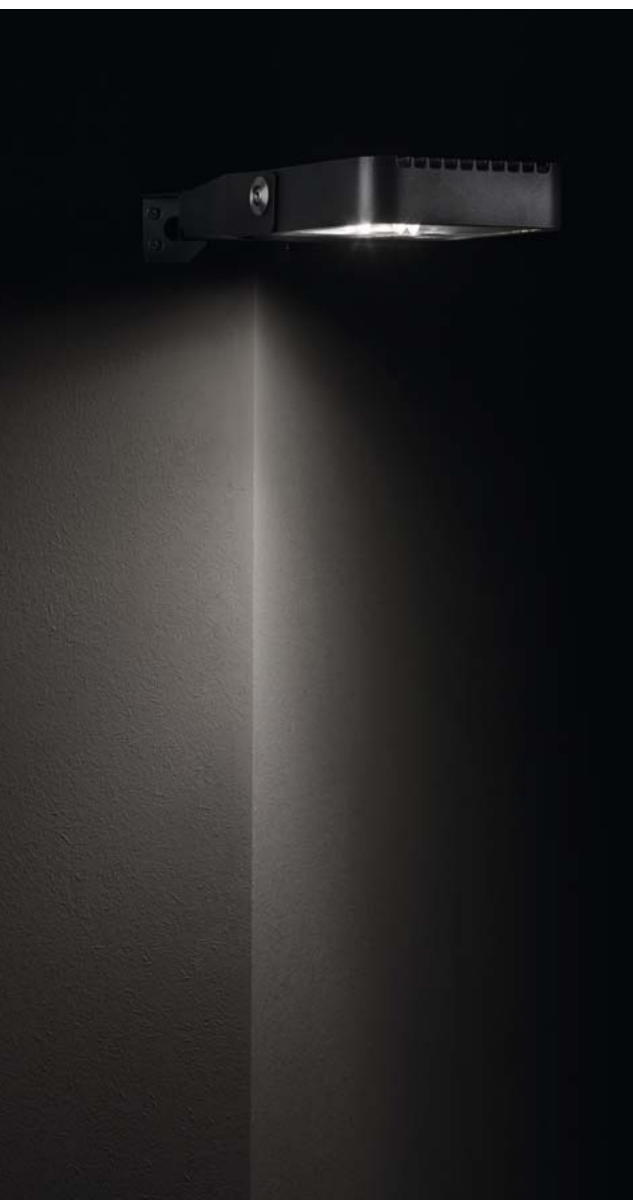




|                                  |  |
|----------------------------------|--|
| <b>POWER / POWER SUPPLY CODE</b> | 38W 230Vac<br><b>SL1010</b> ■ ■ H Anthracite<br>38W 230Vac VIRTUAL MIDNIGHT<br><b>SL1010</b> ■ ■ HM Anthracite |
| <b>LED COLOUR</b>                | F - 2700K<br>5 - 3000K<br>9 - 4000K  |
| <b>OPTICS</b>                    | A - pedestrian zone<br>B - asymmetrical<br>C - footpath<br>D - cycle path                                      |
| <b>LUMEN OUTPUT AT SOURCE</b>    | 3402 lm (3000K)  |
| <b>DELIVERED LUMEN OUTPUT</b>    | 2110 lm (3000K, pedestrian zone)   |
| <b>NO. AND TYPE OF LED</b>       | 4 high-intensity power LEDs<br>3-step MacAdam, 50000h L90 B10 (Ta 25°C)  |
| <b>MATERIAL</b>                  | body in die-cast aluminium<br>screen in serigraphed, tempered extra-clear glass                                |
| <b>POWER SUPPLY UNIT</b>         | built in   |
| <b>POWER CABLES</b>              | includes 5 m neoprene cable<br>H05RN-F 2x1.00 Ø7.00 mm   |
| <b>MOUNTING</b>                  | on pole, Ø60 mm  |
| <b>MAX EXPOSED SURFACE</b>       | 0.056 m <sup>2</sup>   |
| <b>LATERAL SURFACE</b>           | 0.021 m <sup>2</sup>   |
| <b>ACCESSORIES</b>               | none   |
| <b>NOTES</b>                     | double-beam version available on request<br>DALI version available on request                                  |
| <b>PHOTOMETRIC DATA</b>          | see p. 811   |



SIRI BLVD 2.0



SIRI BLVD 3.0

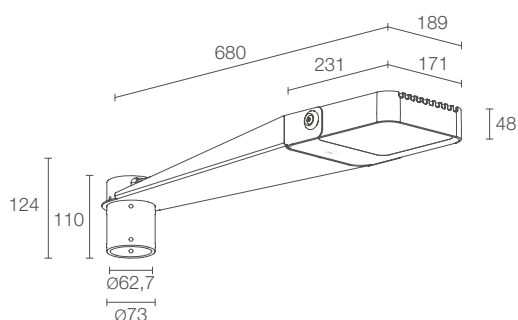

38W 230Vac  
SL2010 ■ ■ H Anthracite

38W 230Vac VIRTUAL MIDNIGHT  
SL2010 ■ ■ HM Anthracite

■ F - 2700K  
5 - 3000K  
9 - 4000K

■ A - pedestrian zone  
B - asymmetrical  
C - footpath  
D - cycle path

3402 lm (3000K)

2110 lm (3000K, pedestrian zone)

4 high-intensity power LEDs  
3-step MacAdam, 50000h L90 B10 (Ta 25°C)

body in die-cast aluminium  
screen in serigraphed, tempered extra-clear glass

built in

includes 5 m neoprene cable  
H05RN-F 2x1.00 Ø7.00 mm

on pole, Ø60 mm

0.098 m<sup>2</sup>

0.032 m<sup>2</sup>

none

double-beam version available on request  
DALI version available on request

see p. 811

38W 230Vac  
SL3010 ■ ■ H Anthracite

38W 230Vac VIRTUAL MIDNIGHT  
SL3010 ■ ■ HM Anthracite

■ F - 2700K  
5 - 3000K  
9 - 4000K

■ A - pedestrian zone  
B - asymmetrical  
C - footpath  
D - cycle path

3402 lm (3000K)

2110 lm (3000K, pedestrian zone)

4 high-intensity power LEDs  
3-step MacAdam, 50000h L90 B10 (Ta 25°C)

body in die-cast aluminium  
screen in serigraphed, tempered extra-clear glass

built in

includes 5 m neoprene cable  
H05RN-F 2x1.00 Ø7.00 mm

surface mounted (wall)

0.056 m<sup>2</sup>

0.016 m<sup>2</sup>

see p. 432


DALI version available on request

see p. 811

# SIRI BLVD

## ACCESSORIES

### ACCESSORIES FOR INSTALLATION



**WD0700H** - Anthracite


Angled wall bracket  
(Siri Blvd 3.0)

## POSITIONING DIAGRAMS


### SIRI BLVD 2.0

Distance between fixtures: 20 m  
Mounted on 4-m pole


**A** - Pedestrian zone

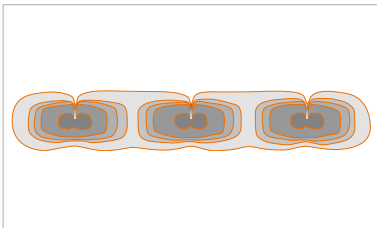


**B** - Asymmetrical

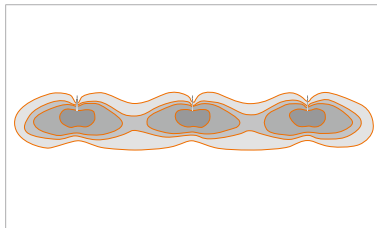

**C** - Footpath

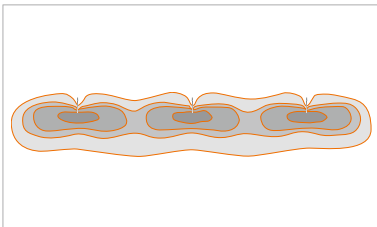

**D** - Cycle path

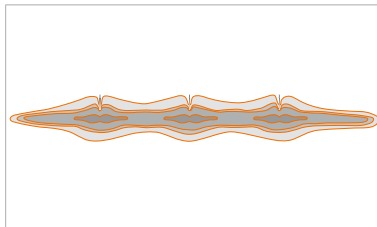

**SIRI BLVD 1.0** >  
3000K, 38W, asymmetrical

Project by / Studio di Architettura  
Andrea Abbadessa,  
ing. Ignazio Stancanelli,  
ing. Giuseppe Malatino  
Light planning by / Light Style  
Maniace-Ortigia, Syracuse, Italy




# SIRI BLVD


## URBAN LIGHTING

**SIRI BLVD 1.0**  
**2.0**  
**3.0**


**A - Pedestrian zone**

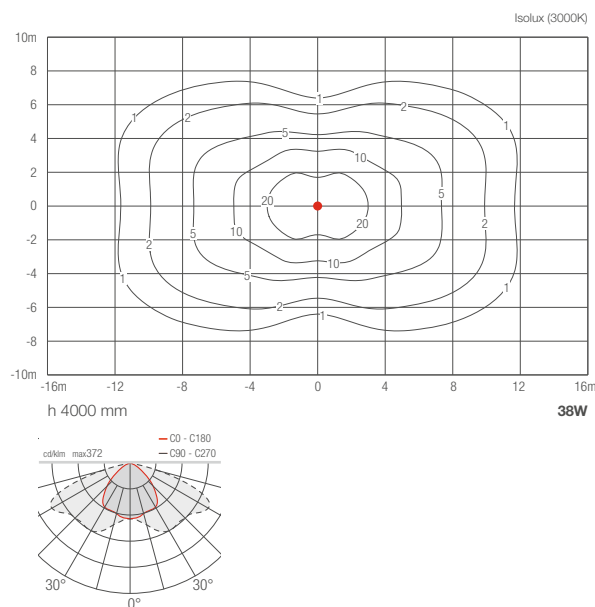

**B - Asymmetrical**

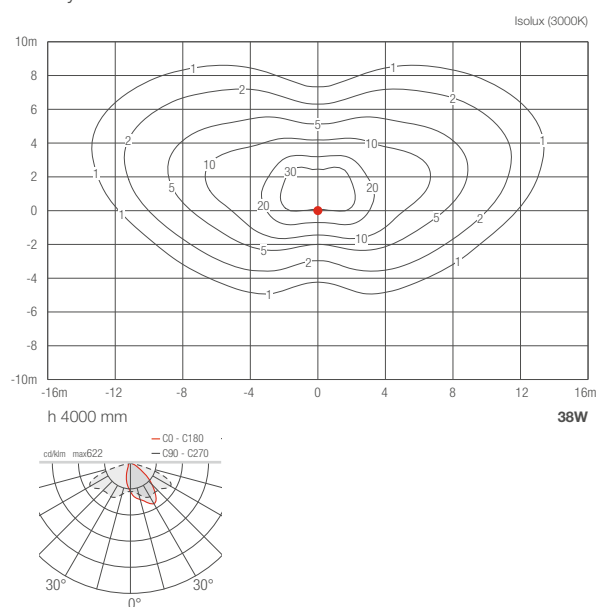

**C - Footpath**

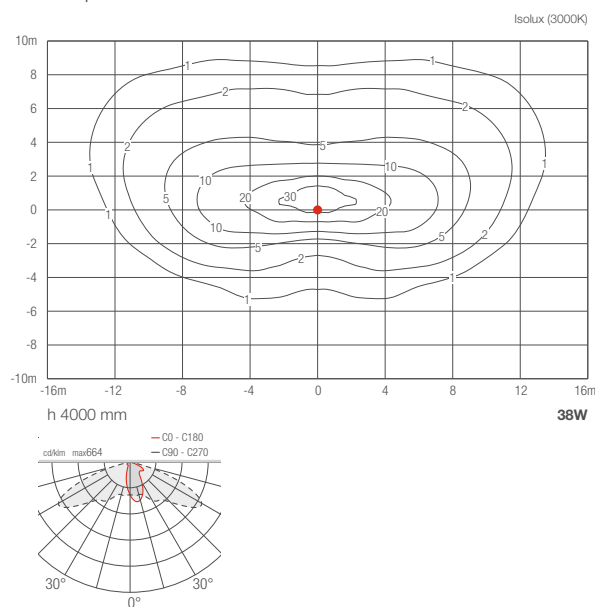

**D - Cycle path**

