



# STEP INSIDE

INDOOR STEP LIGHTS  
ORIENTATION LIGHT

## SEMI-RECESSED



2700K 3000K 4000K 5000K blue



diffuse

CONSTANT CURRENT  
max 2W max 500mA

CONSTANT VOLTAGE  
2W 24Vdc

## SQUARE COVER



STEP INSIDE 2.2 p. 664



STEP INSIDE 2.8 p. 665

## ROUND COVER



STEP INSIDE 2.3 p. 664





STEP INSIDE 2.9 p. 665



# STEP INSIDE



**STEP INSIDE 2.2**



**STEP INSIDE 2.3**





<b>POWER / POWER SUPPLY CODE</b>	<b>max 2W max 500mA</b> <b>SP2212</b> D E White <b>SP2212</b> D C Chrome <b>SP2212</b> D S Satin <b>SP2212</b> D N Black <b>SP2212</b> D T Cor-ten <b>SP2212</b> D 4 Light ivory
<b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>0</b> - 5000K <b>1</b> - blue
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	145 lm (3000K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	35 lm (3000K, 500mA)
<b>NO. AND TYPE OF LED</b>	1 power LED 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C)
<b>MATERIAL</b>	body and cover in aluminium screen in transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	not included, see p. 666 and 844
<b>POWER CABLES</b>	includes 1.5 m PVC cable FROR 2x0.35/0.35 Ø3.5 mm
<b>WIRING</b>	series
<b>MOUNTING</b>	semi-recessed (wall)
<b>ACCESSORIES</b>	see p. 666
<b>NOTES</b>	outdoor version: Step Outside 2.0, p. 362
<b>PHOTOMETRIC DATA</b>	see p. 821

<b>POWER / POWER SUPPLY CODE</b>	<b>max 2W max 500mA</b> <b>SP2312</b> D E White <b>SP2312</b> D C Chrome <b>SP2312</b> D S Satin <b>SP2312</b> D N Black <b>SP2312</b> D T Cor-ten <b>SP2312</b> D 4 Light ivory
<b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>0</b> - 5000K <b>1</b> - blue
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	145 lm (3000K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	35 lm (3000K, 500mA)
<b>NO. AND TYPE OF LED</b>	1 power LED 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C)
<b>MATERIAL</b>	body and cover in aluminium screen in transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	not included, see p. 666 and 844
<b>POWER CABLES</b>	includes 1.5 m PVC cable FROR 2x0.35/0.35 Ø3.5 mm
<b>WIRING</b>	series
<b>MOUNTING</b>	semi-recessed (wall)
<b>ACCESSORIES</b>	see p. 666
<b>NOTES</b>	outdoor version: Step Outside 2.1, p. 362
<b>PHOTOMETRIC DATA</b>	see p. 821



**STEP INSIDE 2.8**



**2W 24Vdc**  
**SP2800 D E** White  
**SP2800 D C** Chrome  
**SP2800 D S** Satin  
**SP2800 D N** Black  
**SP2800 D T** Cor-ten  
**SP2800 D 4** Light ivory

■ **F** - 2700K  
**5** - 3000K  
**9** - 4000K  
**0** - 5000K  
**1** - blue

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED  
 1/4 ANSI BIN (white LED colour)  
 50000h L90 B10 (Ta 25°C)

body and cover in aluminium  
 screen in transparent extra-clear glass

not included, see p. 666

includes 1.5 m PVC cable  
 FROR 2x0.35/0.35 Ø3.5 mm

parallel

semi-recessed (wall)



see p. 666

outdoor version: Step Outside 2.6, p. 363

see p. 821



**STEP INSIDE 2.9**

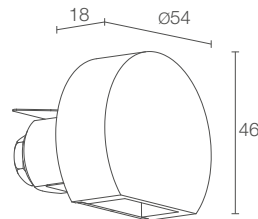

**2W 24Vdc**  
**SP2900 D E** White  
**SP2900 D C** Chrome  
**SP2900 D S** Satin  
**SP2900 D N** Black  
**SP2900 D T** Cor-ten  
**SP2900 D 4** Light ivory

■ **F** - 2700K  
**5** - 3000K  
**9** - 4000K  
**0** - 5000K  
**1** - blue

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED  
 1/4 ANSI BIN (white LED colour)  
 50000h L90 B10 (Ta 25°C)

body and cover in aluminium  
 screen in transparent extra-clear glass

not included, see p. 666

includes 1.5 m PVC cable  
 FROR 2x0.35/0.35 Ø3.5 mm

parallel

semi-recessed (wall)

see p. 666

outdoor version: Step Outside 2.7, p. 363

see p. 821

# STEP INSIDE

## ACCESSORIES AND POWER SUPPLY UNITS

### ACCESSORIES FOR INSTALLATION



#### WC0202

Outer casing for solid walls

### POWER SUPPLY UNITS Step Inside 2.2 / 2.3

#### 350mA

Max no. fixtures	PSU	IP	Page
1/3	A13350VL	20	845
1/15	ACUNI020T1	20	844 845
3/9	A19350QL	20	845
5/12	A312350QL	20	845
1/12 dimmer	ADUNITC	20	848 849 850
2/6	A16350IP67	67	845
5/12	A312350IP67	67	845

#### 500mA

Max no. fixtures	PSU	IP	Page
1/3	A13500TC	20	845
1/10	ACUNI020T1	20	844 845
2/5	A15500QL	20	845
5/10	A310500QL	20	845
1/12 dimmer	ADUNITC	20	848 849 850
1/4	A14500IP67	67	845
5/10	A310500IP67	67	845

### POWER SUPPLY UNITS Step Inside 2.8 / 2.9

Max no. fixtures	PSU	IP	Page
1...n	24Vdc	20	847
1...n	24Vdc	67	847

### STANDARD FINISHES



White



Chrome



Satin



Black



Cor-ten





Light ivory



## POSITIONING DIAGRAMMS

### STEP INSIDE 2.2 / 2.3 / 2.8 / 2.9

#### D - Diffuse

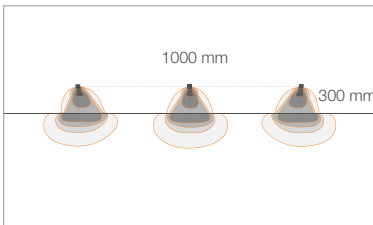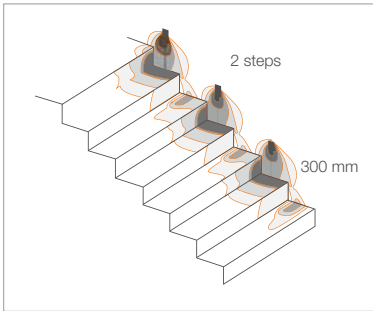

▼  
**STEP INSIDE 2.3**  
3000K, 2W, white





# STEP INSIDE

## INDOOR STEP LIGHTS

### STEP INSIDE 2.2

2.3

2.8

2.9

D - Diffuse

Isolux (3000K)

