


# STRA P

OUTDOOR PROJECTORS, ARCHITECTURAL LIGHTING FOR LARGE BUILDINGS






## STRA P 1.0

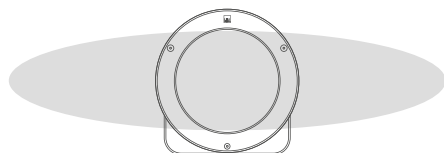


10°x45° optics



Adjustable  
66°x11° optics



patented  
elliptical optics,  
adjusted manually  
with magnet

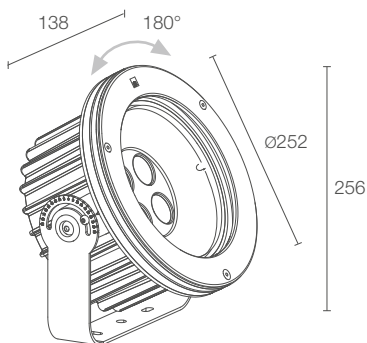

<b>POWER / POWER SUPPLY CODE</b>	37W 230Vac <b>PS1010</b> ■ ■ ■ H Anthracite 37W 230Vac 1-10V <b>PS1010</b> ■ ■ ■ H R Anthracite
<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>LED COLOUR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	V - 11° S - 14° M - 30° L - 37° W - 10°x45° X - 66°x11° adjustable
<b>LUMEN OUTPUT AT SOURCE</b>	3402 lm (3000K, CRI 80)
<b>DELIVERED LUMEN OUTPUT</b>	2024 lm (3000K, 30°, CRI 80) 2205 lm (3000K, 66°x11°, CRI 80)
<b>NO. AND TYPE OF LED</b>	4 high intensity power LEDs 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
<b>MATERIAL</b>	body in die-cast aluminium trim in AISI 316L stainless steel screen in serigraphed, tempered, transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	built in
<b>POWER CABLES</b>	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm
<b>MOUNTING</b>	surface mounted (ceiling, wall, ground)
<b>ACCESSORIES</b>	see p. 239
<b>FEATURES</b>	66°x11° optics adjustable through 360° using magnet included
<b>NOTES</b>	Stra 1.0 recessed version p. 106 DALI version available on request
<b>PHOTOMETRIC DATA</b>	see p. 827





# STRA P

## ACCESSORIES AND POWER SUPPLY UNITS

### ANTI-GLARE ACCESSORIES



#### WH0610

Honeycomb louvre  
built into the lighting fixture

order together with  
the lighting fixture

the honeycomb louvre can be fitted on all  
optics except for the 66°x11° optics

### ACCESSORIES FOR INSTALLATION



#### WN7100

Anti-fall kit

for spare parts, see p. 866

### POWER SUPPLY UNITS Stra P 5.0

Max no. fixtures	PSU	IP	Page
1...n	24Vdc	20	847
1...n	24Vdc	67	847
-	RGBW controller	-	855 - 860

▼

#### STRA P 1.0


2700K, 37W, 30°

Light planning and product distribution / Mise en Scène Éclairage

Project and installation / VinJay-Studio

Photo by / Lisa Ricciotti

La Villa Madie, Cassis, France

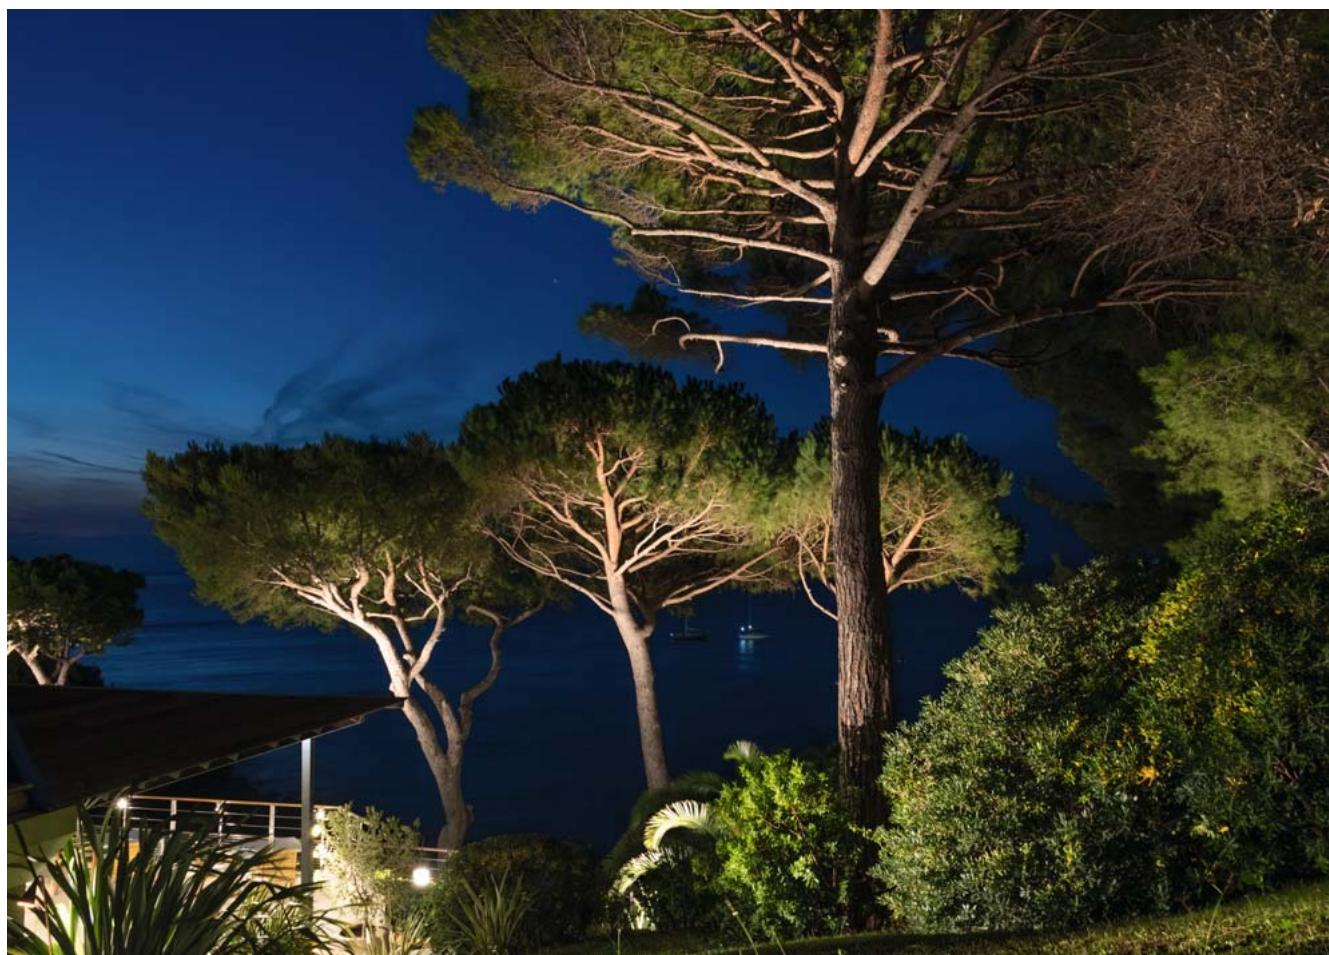




# STRA P


## OUTDOOR PROJECTORS

### STRA P 1.0


#### V - 11° CRI 80

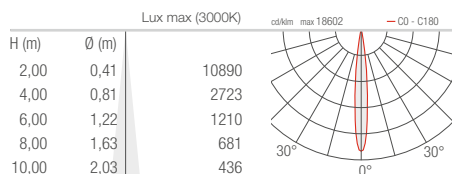


#### S - 14° CRI 80

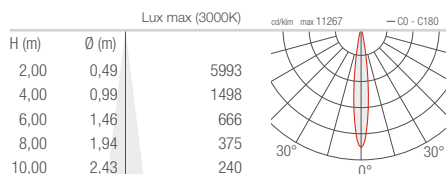


#### M - 30° CRI 80

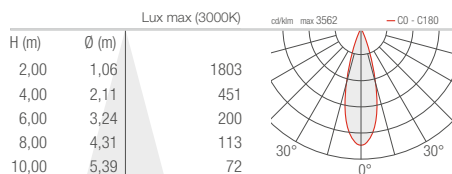


#### L - 37° CRI 80

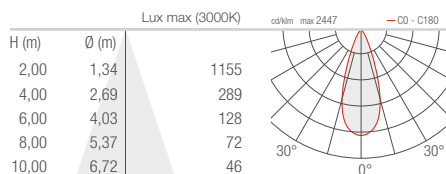

#### W - 10°x45° CRI 80

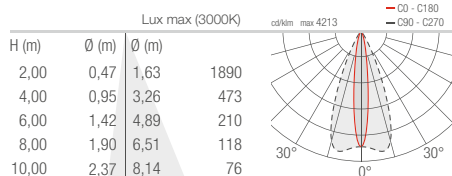


#### X - 66°x11° adjustable CRI 80

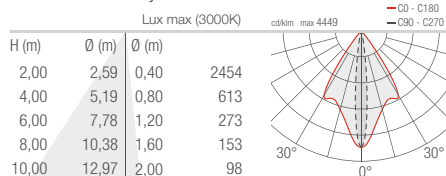


### STRA P 5.0


#### S - 24°

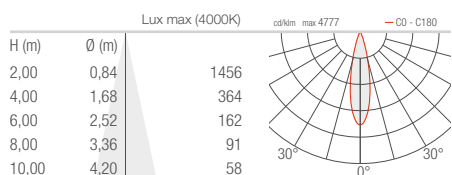


#### M - 33°

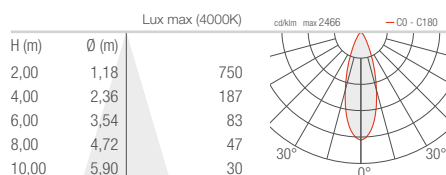


#### L - 60°

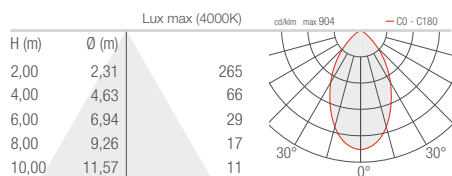

#### W - 32°x61°

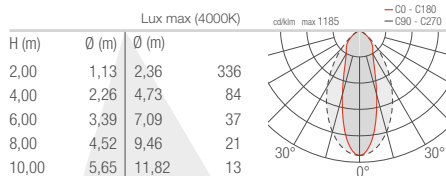

#### X - 66°x11° adjustable

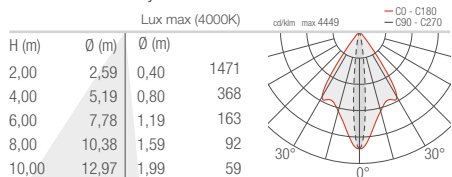

#### Z - 61°x32°

