



# TEKO

INDOOR CEILING MOUNTED  
WITH DIFFUSE LIGHT



diffuse

2700K 3000K 4000K

## SQUARE

## ROUND

80x80 mm



**TEKO 5.0** p. 618  
5W 230Vac  
9W 230Vac

Ø80 mm



**TEKO 5.1** p. 618  
5W 230Vac  
9W 230Vac

100x100 mm



**TEKO 7.0** p. 619  
9W 230Vac  
17W 230Vac

Ø100 mm




**TEKO 7.1** p. 619  
9W 230Vac

# TEKO




**TEKO 5.0**



<b>POWER / POWER SUPPLY CODE</b>	5W 230Vac <b>TK5010</b> ■ D B White  9W 230Vac <b>TK5011</b> ■ D B White
<b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	460 lm (3000K, 5W) 826 lm (3000K, 9W)
<b>DELIVERED LUMEN OUTPUT</b>	330 lm (3000K, 5W) 590 lm (3000K, 9W)
<b>NO. AND TYPE OF LED</b>	power LED matrix 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in anodized aluminium screen in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	built in
<b>POWER CABLES</b>	terminal block
<b>MOUNTING</b>	surface mounted (ceiling)
<b>PHOTOMETRIC DATA</b>	see p. 829




**TEKO 5.1**



<b>POWER / POWER SUPPLY CODE</b>	5W 230Vac <b>TK5110</b> ■ D B White  9W 230Vac <b>TK5111</b> ■ D B White
<b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	534 lm (3000K, 5W) 958 lm (3000K, 9W)
<b>DELIVERED LUMEN OUTPUT</b>	382 lm (3000K, 5W) 684 lm (3000K, 9W)
<b>NO. AND TYPE OF LED</b>	power LED matrix 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in anodized aluminium screen in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	built in
<b>POWER CABLES</b>	terminal block
<b>MOUNTING</b>	surface mounted (ceiling)
<b>PHOTOMETRIC DATA</b>	see p. 829




TEKO 7.0



<b>POWER / POWER SUPPLY CODE</b>	9W 230Vac <b>TK7010</b> ■ D B White  17W 230Vac <b>TK7011</b> ■ D B White
<b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	826 lm (3000K, 9W) 1565 lm (3000K, 17W)
<b>DELIVERED LUMEN OUTPUT</b>	590 lm (3000K, 9W) 1119 lm (3000K, 17W)
<b>NO. AND TYPE OF LED</b>	power LED matrix 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in anodized aluminium screen in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	built in
<b>POWER CABLES</b>	terminal block
<b>MOUNTING</b>	surface mounted (ceiling)
<b>PHOTOMETRIC DATA</b>	see p. 829



TEKO 7.1



<b>POWER / POWER SUPPLY CODE</b>	9W 230Vac <b>TK7110</b> ■ D B White
<b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	958 lm (3000K)
<b>DELIVERED LUMEN OUTPUT</b>	684 lm (3000K)
<b>NO. AND TYPE OF LED</b>	power LED matrix 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in anodized aluminium screen in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	built in
<b>POWER CABLES</b>	terminal block
<b>MOUNTING</b>	surface mounted (ceiling)
<b>PHOTOMETRIC DATA</b>	see p. 829




# TEKO

## INDOOR CEILING MOUNTED


### TEKO 5.0

D - Diffuse

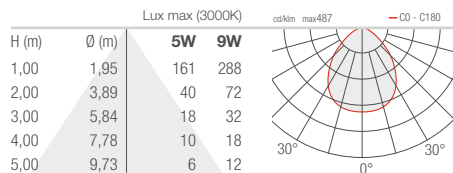


### TEKO 5.1

D - Diffuse

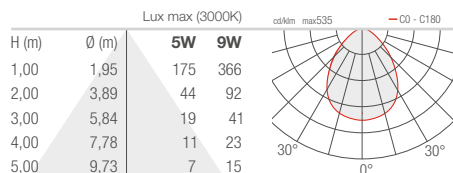

### TEKO 7.0

D - Diffuse

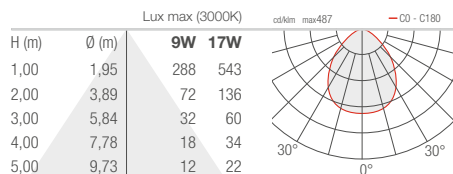

### TEKO 7.1

D - Diffuse

