



Made in Italy

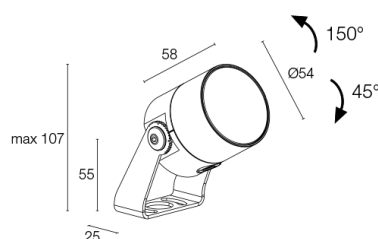

Ginko 2.0, code: GN200209QI
Projectors for outdoor applications

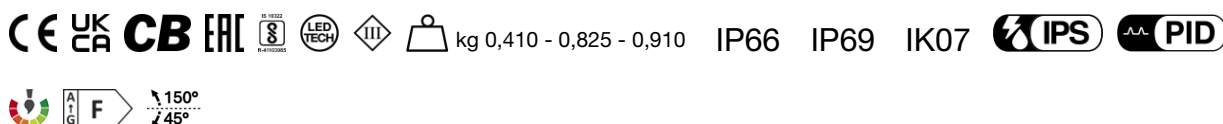

DESCRIPTION

projector for outdoor applications; surface mounted (ceiling, wall, ground, spike); Power consumption: 7W; Power supply: 24Vdc; Lumen output at source: 657 lm (3000K, 7W, CRI 80); Delivered lumen output: 463 lm (3000K, 34°, 7W, CRI 80); 1 high-intensity power LED, 3-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 4000K; Optics: sharp 61°: SHARP optical system consisting of a plano-convex lens for an extremely well-defined light beam, combined with a high-quality technical filter; CRI Colour Rendering Index: 80; Body material: body and bracket made of AISI 316L stainless steel, made entirely on a CNC lathe and then tumble finished; Finishes: finish that provides corrosion resistance of more than 3000 hours of salt spray, making it possible to use the product even in extremely severe atmospheric conditions; RAL finish on request; Screen material: 4-mm-thick transparent extra-clear glass, with high transmittance to ensure chromatic uniformity of light and tempered for excellent resistance to knocks and scratches, with RAL 7015 grey vitrified serigraphy around the edge; power supply unit not included; includes 1.5 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm; Ingress protection: IP66, IP69; Impact resistance: IK07; Casambi control using the Casambi app with dedicated electronics; Protection systems: IPS (Intelligent Protection System) protects lighting fixtures from water infiltrations, which can occur if there are faulty junctions between the cables in outdoor or underwater applications. This innovation, patented by L&L, also guarantees electrical protection against polarity reversal, hot plugging, ESD and power surges, which can occur if there are faults in the electrical circuit; The PID (Protective Impedance Device) protects lighting fixtures from electrical phenomena external to the system, such as static electricity accumulation or electromagnetic interference coming from the mains power. Generally, these are events with a low energy content; Operating temperature: -20°C — +45°C; Glow wire test: 960°C; Photobiological safety: in accordance with IEC TR 62778:2014; Appliance class: class III; Weight: 410 g, stainless steel: 825 g, brass: 910 g; Dimensions: Ø54x58 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WB8012N Standard snoot - black anodized, WB8022N Asymmetrical snoot - black anodized, WF3301 Flexible cable-protection tube - 15 cm, WP0100 Spike for in-ground installation, WP1004 Fastener strap - 5 m, WP1006I Spike for in-ground installation - h 500 mm - stainless steel, WP1007I Spike for in-ground installation - h 800 mm - stainless steel; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

ELECTRICAL CHARACTERISTICS

| | |
|-------------------|--------------------------------|
| Power consumption | 7W |
| Power supply | 24Vdc |
| Power supply unit | power supply unit not included |

LIGHTING CHARACTERISTICS

| | |
|----------------------------|---------------------------------|
| Number and type of LED | 1 high-intensity power LED |
| Average LED life | 50 000h L90 B10 (Ta 25°C) |
| LED colour | 4000K |
| CRI Colour Rendering Index | 80 |
| Binning | 3-step MacAdam |
| Optics | sharp 61° |
| Lumen output at source | 657 lm (3000K, 7W, CRI 80) |
| Delivered lumen output | 463 lm (3000K, 34°, 7W, CRI 80) |

MECHANICAL CHARACTERISTICS


| | |
|-----------------|--|
| Dimensions | Ø54x58 mm |
| Weight | 410 g, stainless steel: 825 g, brass: 910 g |
| Finishes | stainless steel |
| Mounting | with bracket, screws and plugs |
| Body material | body in AISI 316L stainless steel, AISI 316L stainless steel bracket |
| Screen material | screen in serigraphed-grey and transparent, tempered extra-clear glass |

GENERAL CHARACTERISTICS

| | |
|-------------------------|--|
| Ingress protection | IP66, IP69 |
| Operating temperature | -20°C — +45°C |
| Impact resistance | IK07 |
| Energy efficiency class | F (light source) in accordance with EU 2019/2015 |
| Glow wire test | 960°C |
| Appliance class | class III |
| Walkover | no |
| Drive-over | no |
| Power cables | includes 1.5 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm |
| Protection systems | IPS (Intelligent Protection System); PID (Protective Impedance Device) |
| Photobiological safety | in accordance with IEC TR 62778:2014 |
| Notes | Casambi control using the Casambi app with dedicated electronics |

PHOTOMETRIC DATA

Q - 61° sharp CRI 80

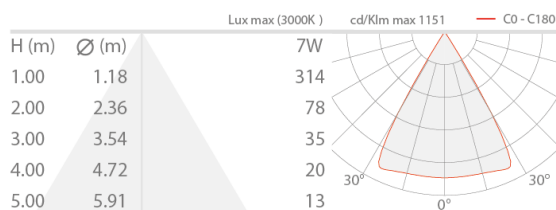


ACCESSORIES

Installation Accessories




WP0100

Spike for in-ground installation



WP1006I

Spike for in-ground installation - h 500 mm - stainless steel



WP1007I

Spike for in-ground installation - h 800 mm - stainless steel

Anti-glare



WB8012N

Standard snoot - black anodized



WB8022N

Asymmetrical snoot - black anodized

Other



WF3301



WP1004

Flexible cable-protection tube - 15 cm
Order together with the lighting fixture

Fastener strap - 5 m

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.