

Made in Italy

 **Ginko 3.0 inox, code: GN30010NXI**
Projectors for outdoor applications

16/05/2026 Rev. 14/2024








 kg 1,25 - 2,41
 



 155° / 30°

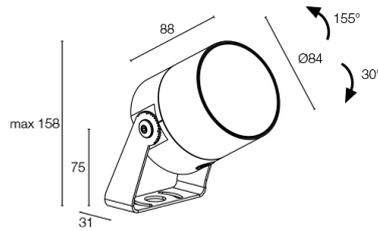

DESCRIPTION

projector for outdoor applications; surface mounted (ceiling, wall, ground, spike); Power consumption: 15W; Power supply: 24Vdc; Lumen output at source: 1662 lm (3000K, 15W, CRI 80); Delivered lumen output: 1162 lm (3000K, 42°, 15W, CRI 80); 1 high power density COB LED, 2-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 2200K; Optics: adjustable 28°x72°; CRI Colour Rendering Index: 80; Body material: body and bracket made of AISI 316L stainless steel, made entirely on a CNC lathe and then tumble finished; Finishes: finish that provides corrosion resistance of more than 3000 hours of salt spray, making it possible to use the product even in extremely severe atmospheric conditions; RAL finish on request; Screen material: 4-mm-thick transparent extra-clear glass, with high transmittance to ensure chromatic uniformity of light and tempered for excellent resistance to knocks and scratches, with RAL 7015 grey vitrified serigraphy around the edge; power supply unit not included; includes 1.50 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm; Ingress protection: IP66, IP69; Impact resistance: IK09; 12°x64°, 28°x72° optics and shadow-effect filter, adjustable through 360° using the magnet provided; version with bracket in customized height available on request; version in brass available on request; Casambi control using the Casambi app with dedicated electronics; Operating temperature: -20°C — +45°C; Glow wire test: 960°C; Photobiological safety: in accordance with IEC TR 62778:2014; Appliance class: class III; Weight: 1250 g, stainless steel: 2405 g; Dimensions: Ø84x88 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WE0201 Magnet for adjustable optics and zoom lens, WP0300 Spike for in-ground installation, WP1004 Fastener strap - 5 m, WP1006I Spike for in-ground installation - h 500 mm - stainless steel, WP1007I Spike for in-ground installation - h 800 mm - stainless steel; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

ELECTRICAL CHARACTERISTICS

Power consumption	15W
Power supply	24Vdc
Power supply unit	power supply unit not included

LIGHTING CHARACTERISTICS

Number and type of LED	1 high power density COB LED
Average LED life	50 000h L90 B10 (Ta 25°C)
LED colour	2200K
CRI Colour Rendering Index	80
Binning	2-step MacAdam
Optics	adjustable 28°x72°
Lumen output at source	1662 lm (3000K, 15W, CRI 80)
Delivered lumen output	1162 lm (3000K, 42°, 15W, CRI 80)

MECHANICAL CHARACTERISTICS

Dimensions	Ø84x88 mm
Weight	1250 g, stainless steel: 2405 g
Finishes	stainless steel
Mounting	with bracket, screws and plugs
Body material	body in AISI 316L stainless steel, AISI 316L stainless steel bracket
Screen material	screen in serigraphed-grey and transparent, tempered extra-clear glass



GENERAL CHARACTERISTICS

Ingress protection	IP66, IP69
Operating temperature	-20°C — +45°C
Impact resistance	IK09
Features	12°x64°, 28°x72° optics and shadow-effect filter, adjustable through 360° using the magnet provided
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Glow wire test	960°C
Appliance class	class III
Walkover	no
Drive-over	no
Power cables	includes 1.50 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm
Photobiological safety	in accordance with IEC TR 62778:2014
Notes	version with bracket in customized height available on request; version in brass available on request; Casambi control using the Casambi app with dedicated electronics

PHOTOMETRIC DATA


X – 28°x72° CRI 80

H (m)	Ø (m)	Ø (m)	15W
1.00	0.49	1.44	1174
2.00	0.98	2.87	294
3.00	1.47	4.31	130
4.00	1.96	5.74	73
5.00	2.45	7.18	47

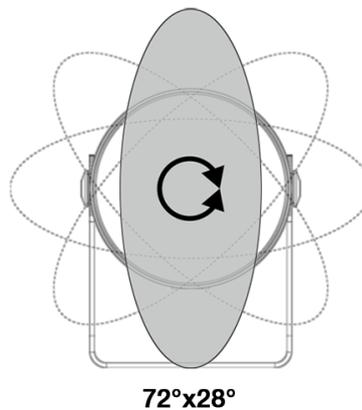


ACCESSORIES


Installation Accessories



WP0300
Spike for in-ground installation



WP1006I
Spike for in-ground installation - h 500 mm - stainless steel



WP1007I
Spike for in-ground installation - h 800 mm - stainless steel

Other



WE0201
Magnet for adjustable optics and zoom lens



WP1004
Fastener strap - 5 m

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.