

SUSPENDED

FOR INDOOR APPLICATIONS



^
KORA 1.0
3000K, 3.5W, black

626

L&L Luce&Light



KORA

INDOOR SUSPENDED
LIGHTING FOR HOSPITALITY AND PRIVATE HOMES


2700K 3000K 4000K



KORA 1.0 p. 628
3.5W 230Vac



narrow medium



KORA 2.0 p. 629
6W 230Vac



narrow medium wide



KORA 3.0 p. 629
21W 230Vac



narrow medium wide

KORA



KORA 1.0



✓
KORA 3.0
3000K, 21W, 38°, white


Interior design by / Cristian Turra
Photo by / Alessio Tamborini
Private residence, Brescia, Italy




POWER / POWER SUPPLY CODE	3.5W 230Vac KR101010 ■ B White KR101010 ■ C Chrome KR101010 ■ N Black KR101010 ■ 1 Pure orange KR101010 ■ 2 Reseda green KR101010 ■ 3 Capri blue KR101010 ■ 4 Light ivory
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 18° M - 35°
LUMEN OUTPUT AT SOURCE	184 lm (3000K)
DELIVERED LUMEN OUTPUT	120 lm (3000K, 35°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anticorodal aluminium, ceiling rose in steel
POWER SUPPLY UNIT	built in
POWER CABLES	includes 2.50 m PVC cable FROR 2x0.75 Ø5.4 mm
MOUNTING	surface mounted (ceiling) with ceiling rose
NOTES	
DESIGN BY	Cibicworkshop
PHOTOMETRIC DATA	see p. 776



KORA 2.0



KORA 3.0



CE kg 0.80 IP40
A A+ A++

6W 230Vac

- KR2010** **B** White
- KR2010** **C** Chrome
- KR2010** **N** Black
- KR2010** **1** Pure orange
- KR2010** **2** Reseda green
- KR2010** **3** Capri blue
- KR2010** **4** Light ivory

F - 2700K
 5 - 3000K
 9 - 4000K

S - 17°
 M - 24°
 L - 58°

460 lm (3000K)

285 lm (3000K, 24°)

1 multichip power LED
3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in anticorrosion aluminium, ceiling rose in steel
screen in plexiglass

built in

includes 2.50 m PVC cable
FROR 2x0.75 Ø5.4 mm

surface mounted (ceiling) with ceiling rose

DALI and 1-10V versions available on request

Cibicworkshop

see p. 776

CE kg 1.60 IP40
A A+ A++

21W 230Vac

- KR3010** **B** White
- KR3010** **C** Chrome
- KR3010** **N** Black
- KR3010** **1** Pure orange
- KR3010** **2** Reseda green
- KR3010** **3** Capri blue
- KR3010** **4** Light ivory

F - 2700K
 5 - 3000K
 9 - 4000K

S - 23°
 M - 38°
 L - 65°

1870 lm (3000K)

1289 lm (3000K, 38°)

1 multichip power LED
3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in anticorrosion aluminium, ceiling rose in steel
screen in plexiglass

built in

includes 2.50 m PVC cable
FROR 2x0.75 Ø5.4 mm

surface mounted (ceiling) with ceiling rose

DALI and 1-10V versions available on request

Cibicworkshop

see p. 776

KORA

FINISHES

STANDARD FINISHES



White



Chrome



Black



Pure orange



Reseda green



Capri blue



Light ivory

KORA 3.0 >
3000K, 65°, customized version with 18W power,
DALI, red RAL finish for body, red cable

Project by / Cibicworkshop
Light Planning by / Maurizio Corà
Photo by / Alberto Parise
Glam Hotel, Milan, Italy

∨
KORA 2.0
3000K, 6W, 58°
black, pure orange, white



630

L&L Luce&Light




KORA


INDOOR SUSPENDED

KORA 1.0

S - 18°

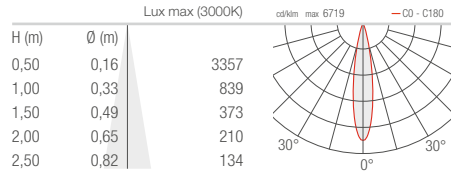


M - 35°

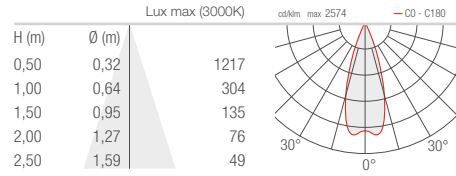


KORA 2.0


S - 17°

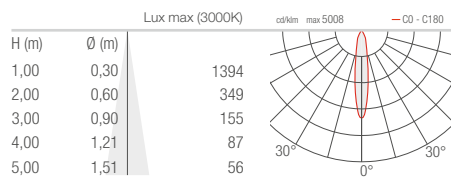

M - 24°

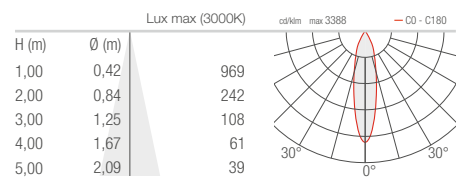


L - 58°

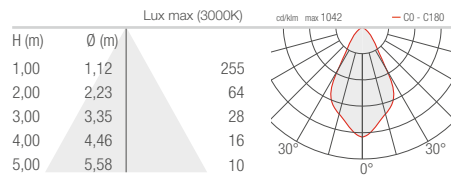


KORA 3.0

S - 23°

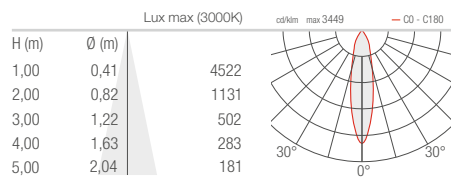

M - 38°

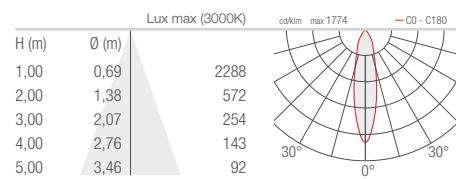

L - 65°

